

# Revenue Metering Reports Implementation Guide for EDI-867 Meter Data

GDE-XX (DRAFT)

Issue: 1.0

Issue Date: June 8, 2015

Public

Copyright © 2015 Independent Electricity System Operator. All rights reserved.

This document uses IESO Internal General Template IESO\_TPL\_0066.

DRAFT

## Document Change History

Issue	Reason for Issue	Date
1.0	Draft as part of MDD Market Trials Participant Feedback	June 8, 2015

DRAFT

# Table of Contents

<b>1. Introduction</b> .....	<b>6</b>
1.1 Document Conventions .....	6
1.2 Assumptions and Limitations.....	7
<b>Interchange Control Header</b> .....	<b>10</b>
<b>Functional Group Header</b> .....	<b>13</b>
<b>Transaction Set Header</b> .....	<b>15</b>
<b>Beginning Segment for Product Transfer and Resale</b> .....	<b>16</b>
<b>Name</b> .....	<b>19</b>
<b>Reference Identification</b> .....	<b>21</b>
<b>Product Transfer and Resale Detail</b> .....	<b>22</b>
<b>Reference Identification</b> .....	<b>24</b>
<b>Quantity</b> .....	<b>26</b>
<b>Measurements</b> .....	<b>28</b>
<b>Reference Identification</b> .....	<b>31</b>
<b>Date/Time Reference</b> .....	<b>32</b>
<b>Transaction Set Trailer</b> .....	<b>33</b>
<b>Functional Group Trailer</b> .....	<b>34</b>
<b>Interchange Control Trailer</b> .....	<b>35</b>
<b>References</b> .....	<b>36</b>
<b>Related Documents</b> .....	<b>36</b>

## List of Figures

No table of figures entries found.

## List of Tables

No table of figures entries found.

DRAFT

# 1. Introduction

This document describes the implementation to be used for the Ontario electric meter read data transfer and is based on the EDI-867 implementations in use in other jurisdictions. The general parameters for the EDI-867 transfer set for use in the utility industry were developed by the Utility Industry Working Group. Meter reading data will be provided by the IESO to market participants in the format described in this document.

## 1.1 Document Conventions

This document follows several conventions. In each segment description there are columns labeled, Req, Max Use, Repeat, Note, and Usage. These columns are as follows:

### Loop Structure:

Req	Indicates whether a field is Mandatory, Conditional or Optional within the general EDI-867 framework. Mandatory indicates the value is always required for a valid EDI-867. Conditional indicates a value may be required, being dependent on previous values or other conditions. Optional means the value is not required for a valid EDI-867, but may be used.
Max Use	Indicates the maximum number of times an element may be used with a given segment or loop.
Repeat	Indicates the maximum (e.g. 5) or minimum (e.g., > 1) number of times a loop must be present.
Usage	Indicates the actual usage under this implementation. This field may be “used” or “must use”. “Must use” indicates that the value must be present, regardless of whether it is optional in the broader EDI spec, for proper data distribution under this implementation. “Used” indicates that the value is used based on the conditions outlined within the specification.

### Element Structure:

Req	Indicates whether a field is Mandatory, Conditional or Optional within the general EDI-867 framework. Mandatory indicates the value is always required for a valid EDI-867. Conditional indicates a value may be required, being dependent on previous values or other conditions. Optional means the value is not required for a valid EDI-867, but may be used.
Type	Indicates the type of the value contained within the elements. Types include ID – specially defined identifier, AN – alphanumeric string, DT – date-time string.
Min/Max	Indicates the minimum and maximum number of characters within the field. Note: fixed length fields (fields where the maximum and minimum are the same) will be right padded with spaces to the end of the field.

Usage Indicates the actual usage under this implementation. This field may be “used” or “must use”. “Must use” indicates that the value must be present, regardless of whether it is optional in the broader EDI spec, for proper data distribution under this implementation. “Used” indicates that the value is used by trading partners in this implementation based on the conditions outlined within the specification.

The term “Metering System identifier” is used throughout this document. A Metering System identifier can represent a Delivery Point, a Summary Meter or a Meter Point.

## 1.2 Assumptions and Limitations

The UIG EDI-867 specification, release 4010 recommends against the use of “ZZ” qualifier. “ZZ” is used to indicate mutually defined identifiers between trading partners. In general avoiding “ZZ” represents a best practice. However, the “ZZ” qualifier is used at several points in this implementation. When the “ZZ” qualifier is used it represents an identifier which is supplied by the IESO itself, and which market participants must follow in order to retrieve data from the IESO.

Fields and segments not in use in this implementation guide are not listed. Please note that element reference is positional. Thus, if an element is not included in a segment, element delimiters are still required. For example, if a segment includes the QQ101, QQ103 and QQ104 elements, the output will look like the following:

QQ\*Data for 101\*\*Data for 103\*Data for 104

**Note:** the pair of element delimiters (in this case asterisks) with nothing between them in the QQ102 position.

– End of Section –

# 867

## Product Transfer and Resale Report

Functional Group = **PT**

This proposed interchange standard contains the format and establishes the data contents of the Product Transfer and Resale Report Transaction Set (867) for use within the context of an Electronic Data Interchange (EDI) environment. The transaction set can be used to: (1) report information about product that has been transferred from one location to another; (2) report sales of product from one or more locations to an end customer; or (3) report sales of a product from one or more locations to an end customer, and demand beyond actual sales (lost orders). Report may be issued by either buyer or seller.

### Transaction Control Header:

<u>Pos</u>	<u>Id</u>	<u>Segment Name</u>	<u>Req</u>	<u>Max Use</u>	<u>Repeat</u>	<u>Notes</u>	<u>Usage</u>
	ISA	Interchange Control Header	M	1			Must use
	GS	Functional Group Header	M	1			Must use

### Heading:

<u>Pos</u>	<u>Id</u>	<u>Segment Name</u>	<u>Req</u>	<u>Max Use</u>	<u>Repeat</u>	<u>Notes</u>	<u>Usage</u>
010	ST	Transaction Set Header	M	1			Must use
020	BPT	Beginning Segment for Product Transfer and Resale	M	1			Must use

<u>LOOP ID - N1</u>					<u>Repeat</u>		
080	N1	Name	O	3			Must use
120	REF	Reference Identification	O	2			Must use

### Detail:

<u>Pos</u>	<u>Id</u>	<u>Segment Name</u>	<u>Req</u>	<u>Max Use</u>	<u>Repeat</u>	<u>Notes</u>	<u>Usage</u>
------------	-----------	---------------------	------------	----------------	---------------	--------------	--------------

<u>LOOP ID - PTD</u>					<u>Repeat</u>		
010	PTD	Product Transfer and Resale Detail	M	1		N2/010	Must use
030	REF	Reference Identification	O	10			Used

<u>LOOP ID - QTY</u>					<u>Repeat</u>		
110	QTY	Quantity	O	1			Must use
160	MEA	Measurements	O	1			Used
190	REF	Reference Identification	O	2			Used
210	DTM	Date/Time Reference	O	2			Used



**Summary:**

<u>Pos</u>	<u>Id</u>	<u>Segment Name</u>	<u>Req</u>	<u>Max Use</u>	<u>Repeat</u>	<u>Notes</u>	<u>Usage</u>
030	SE	Transaction Set Trailer	M	1			Must use

**Transaction Control Trailer:**

<u>Pos</u>	<u>Id</u>	<u>Segment Name</u>	<u>Req</u>	<u>Max Use</u>	<u>Repeat</u>	<u>Notes</u>	<u>Usage</u>
	GE	Functional Group Trailer	M	1			Must use
	IEA	Interchange Control Trailer	M	1			Must use

**Notes:**

Each use of the PTD loop will represent one meter channel.

DRAFT

# ISA

## Interchange Control Header

Pos:	Max: 1
Loop: N/A	Mandatory Elements: 16

This segment is used to start and identify an interchange of zero or more functional groups and interchange-related control segments. The ISA segment explicitly uses fixed length fields.

### Element Summary:

Ref	ID	Element Name	Req	Type	Min/Max	Usage				
ISA01	I01	<b>Authorization Information Qualifier</b> <b>Description:</b> Code to identify the type of information in the Authorization Information field	M	ID	2/2	Must Use				
		<table><thead><tr><th><u>Code</u></th><th><u>Name</u></th></tr></thead><tbody><tr><td>00</td><td>No Authorization Information present. (No meaningful information in I02.)</td></tr></tbody></table>	<u>Code</u>	<u>Name</u>	00	No Authorization Information present. (No meaningful information in I02.)				
<u>Code</u>	<u>Name</u>									
00	No Authorization Information present. (No meaningful information in I02.)									
		<b>Note:</b> No other codes are supported in this implementation at this time.								
ISA02	I02	<b>Authorization Information</b> <b>Description:</b> Information used for additional identification or authorization of the interchange sender or the data in the interchange; the type of information is set by the Authorization Information Qualifier. (I01)	M	AN	10/10	Must Use				
ISA03	I03	<b>Security Information Qualifier</b> <b>Description:</b> Code to identify the type of information in the Security Information field.	M	ID	2/2	Must Use				
		<table><thead><tr><th><u>Code</u></th><th><u>Name</u></th></tr></thead><tbody><tr><td>00</td><td>No Security Information present. (No meaningful information in I04.)</td></tr></tbody></table>	<u>Code</u>	<u>Name</u>	00	No Security Information present. (No meaningful information in I04.)				
<u>Code</u>	<u>Name</u>									
00	No Security Information present. (No meaningful information in I04.)									
		<b>Note:</b> No other codes are supported in this implementation at this time.								
ISA04	I04	<b>Security Information</b> <b>Description:</b> This is used for identifying the security information about the interchange sender or the data in the interchange; the type of information is set by the Security Information Qualifier (I03)	M	AN	10/10	Must Use				
ISA05	I05	<b>Interchange ID Qualifier</b> <b>Description:</b> Qualifier to designate the system/method of code structure used to designate the sender or receiver ID element being qualified	M	ID	2/2	Must Use				
		<table><thead><tr><th><u>Code</u></th><th><u>Name</u></th></tr></thead><tbody><tr><td>ZZ</td><td>Mutually Defined</td></tr></tbody></table>	<u>Code</u>	<u>Name</u>	ZZ	Mutually Defined				
<u>Code</u>	<u>Name</u>									
ZZ	Mutually Defined									
		<b>Note:</b> No other codes are supported in this implementation at this time.								

Ref	ID	Element Name	Req	Type	Min/Max	Usage				
ISA06	I06	<b>Interchange Sender ID</b> <b>Description:</b> Identification code published by the sender for Other parties to use as the receiver ID to route data to them; the sender always codes this value in the sender ID element	M	AN	15/15	Must Use				
ISA07	I05	<b>Interchange ID Qualifier</b> <b>Description:</b> Qualifier to designate the system/method of code structure used to designate the sender or receiver ID element being qualified  <table border="1"> <thead> <tr> <th>Code</th> <th>Name</th> </tr> </thead> <tbody> <tr> <td>ZZ</td> <td>Mutually Defined</td> </tr> </tbody> </table> <b>Note:</b> No other codes are supported in this implementation at this time.	Code	Name	ZZ	Mutually Defined	M	ID	2/2	Must Use
Code	Name									
ZZ	Mutually Defined									
ISA08	I07	<b>Interchange Receiver ID</b> <b>Description:</b> Identification code published by the receiver of the data; When sending, it is used by the sender as their sending ID, thus other parties sending to them will use this as a receiving ID to route data to them.	M	AN	15/15	Must Use				
ISA09	I08	<b>Interchange Date</b> <b>Description:</b> Date of the interchange. Date expressed as YYMMDD	M	DT	6/6	Must Use				
ISA10	I09	<b>Interchange Time</b> <b>Description:</b> Time of the interchange. Time expressed in 24-hour clock time HHMM	M	TM	4/4	Must Use				
ISA11	I10	<b>Interchange Control Standards Identifier</b> <b>Description:</b> Code to identify the agency responsible for the control standard used by the message that is enclosed by the interchange header and trailer.  <table border="1"> <thead> <tr> <th>Code</th> <th>Name</th> </tr> </thead> <tbody> <tr> <td>U</td> <td>US EDI Community of ASC X.12, TDCC, and UCS</td> </tr> </tbody> </table> <b>Note:</b> No other codes are supported in this implementation at this time.	Code	Name	U	US EDI Community of ASC X.12, TDCC, and UCS	M	ID	1/1	Must Use
Code	Name									
U	US EDI Community of ASC X.12, TDCC, and UCS									
ISA12	I11	<b>Interchange Control Version Number</b> <b>Description:</b> This version number covers the interchange control segments.  <table border="1"> <thead> <tr> <th>Code</th> <th>Name</th> </tr> </thead> <tbody> <tr> <td>401</td> <td>Draft Standards for Trial Use Approved for Publication by ASC X12 Procedures Review Board through October 1997</td> </tr> </tbody> </table> <b>Note:</b> No other codes are supported in this implementation at this time.	Code	Name	401	Draft Standards for Trial Use Approved for Publication by ASC X12 Procedures Review Board through October 1997	M	ID	5/5	Must Use
Code	Name									
401	Draft Standards for Trial Use Approved for Publication by ASC X12 Procedures Review Board through October 1997									

Ref	ID	Element Name	Req	Type	Min/Max	Usage						
		time.										
ISA13	I12	<b>Interchange Control Number</b> <b>Description:</b> A control number assigned by the interchange sender.	M	NO	9/9	Must Use						
ISA14	I13	<b>Acknowledgment Requested</b> <b>Description:</b> Code sent by the sender to request an interchange acknowledgment (TA1)	M	ID	1/1	Must Use						
		<table border="1"> <thead> <tr> <th><u>Code</u></th> <th><u>Name</u></th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No acknowledgement required</td> </tr> </tbody> </table> <p><b>Note:</b> No other codes are supported in this implementation at this time.</p>	<u>Code</u>	<u>Name</u>	0	No acknowledgement required						
<u>Code</u>	<u>Name</u>											
0	No acknowledgement required											
ISA15	I14	<b>Usage Indicator</b> <b>Description:</b> Code to indicate whether data enclosed by this Interchange envelope is test, production or information.	M	ID	1/1	Must Use						
		<table border="1"> <thead> <tr> <th><u>Code</u></th> <th><u>Name</u></th> </tr> </thead> <tbody> <tr> <td>P</td> <td>Production Data</td> </tr> <tr> <td>T</td> <td>Test Data</td> </tr> </tbody> </table> <p><b>Note:</b> No other codes are supported in this implementation at this time.</p>	<u>Code</u>	<u>Name</u>	P	Production Data	T	Test Data				
<u>Code</u>	<u>Name</u>											
P	Production Data											
T	Test Data											
ISA16	I15	<b>Component Element Separator</b> <b>Description:</b> The component element separator is a delimiter and not a data element so "Type" is not applicable. This field provides the delimiter used to separate component data elements within a composite data structure; this value must be different than the data element separator and the segment terminator. The Component Element Separator will always be a colon in this implementation. Composite fields are not used in this implementation.	M		1/1	Must Use						

**Example:**

ISA\*00\* \*00\* \*ZZ\*0 \*ZZ\*123456 \*150508\*0648\*U\*00401\*000015538\*0\*P\*:

This segment is used to indicate the beginning of a functional group and to provide control information.

### Semantics:

- GS04 is the group date.
- GS05 is the group time.
- The data interchange control number GS06 in this header must be identical to the same data element in the associated functional group trailer, GE02.

### Comments:

- A functional group of related transaction sets, within the scope of X12 standards, consists of a collection of similar transaction sets enclosed by a functional group header and a functional group trailer.

### Element Summary:

Ref	ID	Element Name	Req	Type	Min/Max	Usage				
GS01	479	<b>Functional Identifier Code</b> <b>Description:</b> Code identifying a group of application related transaction sets. <table border="1"> <thead> <tr> <th>Code</th> <th>Name</th> </tr> </thead> <tbody> <tr> <td>PT</td> <td>Product Transfer and Resale Report (867)</td> </tr> </tbody> </table> <b>Note:</b> No other codes are supported in this implementation at this time.	Code	Name	PT	Product Transfer and Resale Report (867)	M	ID	2/2	Must Use
Code	Name									
PT	Product Transfer and Resale Report (867)									
GS02	142	<b>Application Sender's Code</b> <b>Description:</b> Code identifying party sending transmission; codes agreed to by trading partners.	M	AN	2/15	Must Use				
GS03	124	<b>Application Receiver's Code</b> <b>Description:</b> Code identifying party receiving transmission. Codes agreed to by trading partners.	M	AN	2/15	Must Use				
GS04	373	<b>Date</b> <b>Description:</b> Date expressed as CCYYMMDD	M	DT	8/8	Must Use				
GS05	337	<b>Time</b> <b>Description:</b> Time expressed in 24-hour clock time as follows: HHMM, or HHMMSS, or HHMMSSD, or HHMMSSDD, where H = hours (00-23), M = minutes (00-59), S = integer seconds (00-59) and DD = decimal seconds; decimal seconds are expressed as follows: D = tenths (0-9) and DD = hundredths (00-99)	M	TM	4/8	Must Use				
GS06	28	<b>Group Control Number</b> <b>Description:</b> Assigned number originated and maintained by the Sender	M	NO	1/9	Must Use				

Ref	ID	Element Name	Req	Type	Min/Max	Usage
GS07	455	<b>Responsible Agency Code</b> <b>Description:</b> Code used in conjunction with Data Element 480 to Identify the issuer of the standard.	M	ID	1/2	Must Use

Code    Name

X            Accredited Standards Committee X12

**Note:** No other codes are supported in this implementation at this time.

GS08	480	<b>Version / Release / Industry Identifier Code</b> <b>Description:</b> Code indicating the version, release, sub-release, and industry identifier of the EDI standard being used, including the GS and GE segments; if code in DE455 in GS segment is X, then in DE 480 positions 1-3 are the version number; positions 4-6 are the release and sub-release, level of the version; and positions 7-12 are the industry or trade association identifiers (optionally assigned by user); if code in DE455 in GS segment is T, then other formats are allowed.	M	AN	1/12	Must Use
------	-----	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---	----	------	----------

Code    Name

004010      Draft Standards Approved for Publication by

ASC X12 Procedures Review Board through October 1997

**Note:** No other codes are supported in this implementation at this time.

**Example:**

GS\*PT\*0\*123456\*20150508\*0648\*15538\*X\*0040101

# ST

## Transaction Set Header

Pos: 010	Max: 1
Heading – Mandatory	
Loop: N/A	Elements: 2

This segment is used to indicate the start of a transaction set and to assign a control number.

### Semantics:

1. The transaction set identifier (ST01) used by the translation routines of the interchange partners to select the appropriate transaction set definition (e.g., 810 selects the Invoice Transaction Set).

### Element Summary:

Ref	Id	Element Name	Req	Type	Min/Max	Usage
ST01	143	<b>Transaction Set Identifier Code</b> <b>Description:</b> Code uniquely identifying a Transaction Set	M	ID	3/3	Must use
		<u>Code Name</u> 867 Product Transfer and Resale Report				
ST02	329	<b>Transaction Set Control Number</b> <b>Description:</b> Identifying control number that must be unique within the transaction set functional group assigned by the originator for a transaction set.  <b>Note:</b> This number is used to pair the Transaction Set Header with the Transaction Set Trailer. In EDI formats where multiple ST segments can occur, this control number is very important to maintaining the integrity of the file. In this EDI-867 implementation, only one ST loop is allowed per file. Because of this restriction this value will always be 0001.	M	AN	4/9	Must use

### Example:

ST\*867\*0001

# BPT

## Beginning Segment for Product Transfer and Resale

Pos: 020	Max: 1
Heading - Mandatory	
Loop: N/A	Elements: 5

This segment is used to indicate the beginning of the Product Transfer and Resale Report Transaction Set and transmit identifying data.

### Semantics:

1. BPT02 identifies the report number.
2. BPT03 identifies the report date.

### Element Summary:

Ref	Id	Element Name	Req	Type	Min/Max	Usage
BPT01	353	<b>Transaction Set Purpose Code</b> <b>Description:</b> Code identifying purpose of transaction set	M	ID	2/2	Must use
		<u>Code Name</u> 00 Original <b>Description:</b> Conveys original readings for the account being reported. Use for both Inbound and Outbound transactions				
		<b>Note:</b> No other codes are supported in this implementation at this time. The full UIG EDI-867 specification does allow for other codes.				
BPT02	127	<b>Reference Identification</b> <b>Description:</b> Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier. It is a unique transaction identification number assigned by the originator of this transaction. <b>Note:</b> This number should be unique for every EDI-867 file produced by a given system. If trading partners are using multiple systems, this identifier may not be unique.	O	AN	1/30	Used
BPT03	373	<b>Date</b> <b>Description:</b> Date expressed as CCYYMMDD. Transaction Creation Date	M	DT	8/8	Must Use



Ref	Id	Element Name	Req	Type	Min/Max	Usage
BPT04	755	<b>Report Type Code</b> <b>Description:</b> Code indicating the title or contents of a document, report or supporting item  <u>Code Name</u> C1 Cost Data Summary <b>Description:</b> Interval readings  <b>Note:</b> No other codes are supported in this implementation at this time. The full UIG EDI-867 specification does allow for other codes.	O	ID	2/2	Used
BPT09	127	<b>Reference Information</b> <b>Description:</b> Code indicating the report type of the meter data EDI file  <b>Note:</b> For Meter Data Report Profiles, the reference information is formatted as Participant Role-Report Type such as MMP-TMD-WL MMP-TMD-WOL MMP-VMD  MMPT-TMD-WL MMPT-TMD-WOL MMPT-VMD  TRAN-TMD-WL TRAN-TMD-WOL TRAN-VMD  LDC-TMD-WL LDC-TMD-WOL LDC-VMD  MSP-TMD-WL MSP-TMD-WOL MSP-VMD  MDA-TMD-WL MDA-TMD-WOL MDA-VMD  For Ad-Hoc Requests, the reference information is formatted as MD-AD-HOC-Request ID e.g. MD-AD-HOC-12345	O	AN	1/30	Used

**Example:**

BPT\*00\*15538\*20150508\*C1\*\*\*\*\*MMP-TMD-WL (Meter Data Report Profile Totalized Meter Data with losses for MMP participant role)

BPT\*00\*15538\*20150508\*C1\*\*\*\*\*MD-AD-HOC-12345 (Meter Data Ad-Hoc Request)

DRAFT

# N1

## Name

Pos: 080	Max: 3
Heading - Optional	
Loop: N1	Elements: 5

This segment is used to identify a party by type of organization, name, and code.

### Syntax:

1. N103 is required. N102 is not used for processing purposes. Note: the UIG EDI-867 specification allows for either N102 or N103 to be used. This implementation requires N103 exclusively.
2. If either N103 or N104 are present, then the others are required.

### Comments:

1. This segment, used alone, provides the most efficient method of providing organizational identification. To obtain this efficiency the "ID Code" (N104) must provide a key to the table maintained by the transaction processing party.
2. Two N1 segments will be used in this implementation. One identifying the originator of the transaction, the other identifying the receiver of the transaction. This is specific to the Independent Electricity System Operator and differs from the UIG specification.

### Element Summary:

Ref	Id	Element Name	Req	Type	Min/Max	Usage
N101	98	<b>Entity Identifier Code</b> <b>Description:</b> Code identifying an organizational entity, a physical location, property or an individual.  <u>Code Name</u>  8S Exchanger <b>Description:</b> Used to identify the organization (i.e., the IESO) operating the market.  SJ Service Provider <b>Description:</b> Market Participant (MP)  <b>Note:</b> No other codes are supported in this implementation at this time. The full UIG EDI-867 specification does allow for other codes.	M	ID	2/3	Must Use
N102	93	<b>Name</b> <b>Description:</b> Free-form name, this name if used is only for clarity of the transaction. Not used in processing, not verified consistent with N104. This should be the short name of the participant. The IESO itself will be identified by "Independent Electricity System Operator".  <b>Note:</b> This field is not used for processing by the IESO. It is not recommended that this field be used for processing by participants.	C	AN	1/60	Used

Ref	Id	Element Name	Req	Type	Min/Max	Usage
N103	66	<b>Identification Code Qualifier</b> <b>Description:</b> Code designating the system/method of code structure used for Identification Code (67)	C	ID	1/2	Must Use

Code Name  
ZZ Mutually Defined

**Note:** No other codes are supported in this implementation at this time. The full UIG EDI-867 specification does allow for other codes.

N104	67	<b>Identification Code</b> <b>Description:</b> Code identifying a party or other code. This will be the Organization ID of the participant as assigned by the IESO. The IESO itself will be identified by the code "0".	C	AN	2/80	Used
------	----	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---	----	------	------

N106	98	<b>Entity Identifier Code</b> <b>Description:</b> Code identifying an organizational entity, a physical location, property or an individual	O	ID	2/3	Must Use
------	----	------------------------------------------------------------------------------------------------------------------------------------------------	---	----	-----	----------

Code Name  
40 Receiver

**Description:** Entity to accept transmission

41 Submitter

**Description:** Entity transmitting transaction set

**Note:** The entity providing the data (in this case the IESO) will always be considered the Submitter. The entity receiving the data (in this case the participant) will always be considered the Receiver. Use of these codes may change with transactions between other trading partners.

### Example:

```
N1*8S*Independent Electricity System Operator*ZZ*0**41
N1*SJ*Big Electric Co*ZZ*123456**40
```

### Note:

The UIG spec allows for the use of N2, N3, and N4 segments. These segments provide additional information regarding address and location. These segments are not used in this implementation.

# REF Reference Identification

Pos: 120	Max: 2
Heading - Optional	
Loop: N1	Elements:2

This segment is used to specify identifying information.

## Comments:

1. Only one REF01 code is required.

## Element Summary:

Ref	Id	Element Name	Req	Type	Min/Max	Usage
REF01	128	<b>Reference Identification Qualifier</b> <b>Description:</b> Code qualifying the Reference Identification  <u>Code Name</u> LU Location Number  <b>Note:</b> No other codes are supported in this implementation at this time. The full UIG EDI-867 specification does allow for other codes.	M	AN	2/3	Must Use
REF02	127	<b>Reference Identification</b> <b>Description:</b> This represents the Metering System Identifier or the word "ALL" for reports on all meters under contract for a given report. These IDs are assigned to points by the IESO based on the selected service point options in your meter data report profile or the ad-hoc meter data report request.  ALLDP = All Delivery Points ALLSP = All Summary Points ALLMP = All Meter Points ALLDP+ALLSP = All Delivery Points and Summary Points ALLDP+ALLMP = All Delivery Points and Meter Points ALLSP+ALLMP = All Summary Points and Meter Points ALL = ALLDP + ALLSP + ALLMP DP = One or more Delivery Point	C	AN	1/30	Must Use

## Example:

```
REF*LU*ALL
REF*LU*ALLDP
```

# PTD

## Product Transfer and Resale Detail

Pos: 010	Max: 1
Detail - Mandatory	
Loop: PTD	Elements: 3

This segment is used to indicate the start of detail information relating to the transfer/resale of a product and provide identifying data. Each PTD represents one meter channel.

### Syntax:

1. If either PTD04 or PTD05 is present, then the other is required.

### Comments:

Each PTD loop will represent a meter channel, whether demand, monthly, or detailed interval data.

### Element Summary:

Ref	Id	Element Name	Req	Type	Min/Max	Usage
PTD01	521	<b>Product Transfer Type Code</b> <b>Description:</b> Code identifying the type of product transfer	M	ID	2/2	Must Use
		<u>Code Name</u> PM Physical Meter Information <b>Description:</b> Individual meter installation.				
		<b>Note:</b> No other codes are supported in this implementation at this time. The full UIG EDI-867 specification does allow for other codes.				
PTD04	128	<b>Reference Identification Qualifier</b> <b>Description:</b> Code qualifying the Reference Identification. The Reference Identification Qualifier will always be "OZ" for this implementation.	C	ID	2/3	Used
		<u>Code Name</u> OZ Product Number				
		<b>Note:</b> No other codes are supported in this implementation at this time. The full UIG EDI-867 specification does allow for other codes.				
PTD05	127	<b>Reference Identification</b> <b>Description:</b> Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier	C	AN	1/30	Used
		<u>Code Name</u> EL Electric Service				
		<b>Note:</b> No other codes are supported in this implementation at this time. The full UIG EDI-867 specification does allow for other codes.				

**Example:**

PTD\*PM\*\*\*OZ\*EL

DRAFT

# REF Reference Identification

Pos: 030	Max: 10
Detail - Optional	
Loop: PTD	Elements: 3

This segment is used to specify identifying information.

## Comments:

- At least three REF records are required for every PTD loop: LU, MT, and MG if metered service - LU, MT, and SC if un-metered service.

## Element Summary:


Ref	Id	Element Name	Req	Type	Min/Max	Usage
REF01	128	<b>Reference Identification Qualifier</b> <b>Description:</b> Code qualifying the Reference Identification  <u>Code Name</u> 6W Sequence Number <b>Description:</b> Optional channel number. Only used when there is more than one channel on a meter measuring the same quantity (e.g. two KWh channels).  LU Location Number <b>Description:</b> <i>Required.</i> The Metering System identifier as assigned by the IESO. Note: This reference is not necessarily numeric.  MG Meter Number <b>Description:</b> <i>Required.</i> The physical meter serial number or seal number.  MT Meter Type <b>Description:</b> <i>Required.</i> Used to identify the type of consumption measured by this meter and channel. Defines the interval between measurements. See REF02 for examples.  <b>Note:</b> No other codes are supported in this implementation at this time. The full UIG EDI-867 specification does allow for other codes.	M	ID	2/3	Must Use
REF02	127	<b>Reference Identification</b> <b>Description:</b> Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier  <b>User Note 3:</b> When REF01 is MT, the meter type is expressed as a five character field. The first two characters are the type of consumption, expressed as: K3 – Kilovolt Amperes Reactive Hour KH – Kilowatt Hour 68 – Amperes (represented in Ampere Squared Hours) 70 – Volts (represented in Volt Squared Hours)	C	AN	1/30	Must Use



Ref	Id	Element Name	Req	Type	Min/Max	Usage
		The next three-characters are the metering interval, expressed as: NNN = number of minutes; from 001 to 999 in factors or multiples of 5				
		Examples: KH005      5-minute interval data. KH015      15-minute interval data. KH060      Hourly interval data.				
<b>REF03</b>	<b>352</b>	<b>Description</b> <b>Description:</b> A free form description to clarify the related data elements and their content.	<b>C</b>	<b>AN</b>	<b>1/80</b>	<b>Used</b>

**Example:**

```
REF*6W*1*
REF*LU*1000099999*
REF*MG*R19362006*
REF*MT*KH005*
```

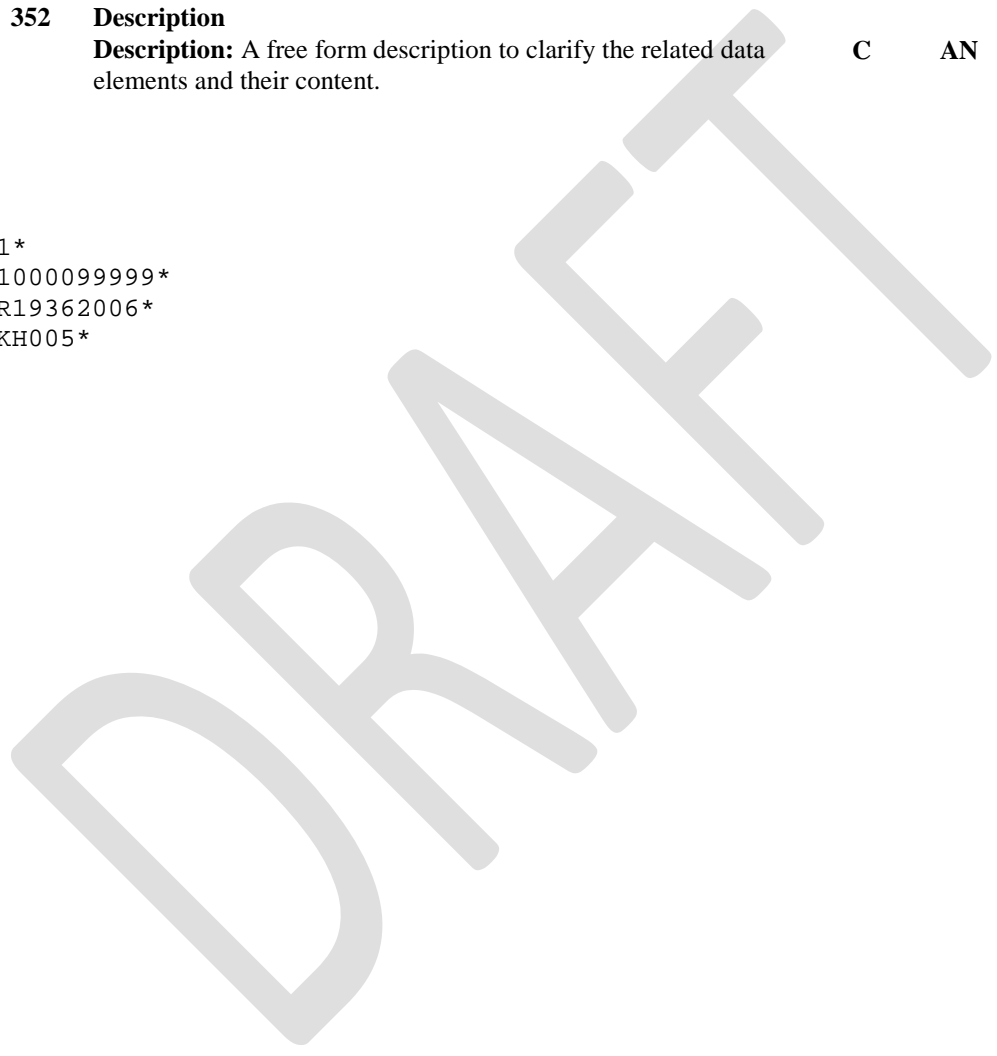

# QTY Quantity

Pos: 110	Max: 1
Detail - Optional	
Loop: QTY	Elements: 3

This segment is used to specify quantity information.

## Element Summary:

Ref	Id	Element Name	Req	Type	Min/Max	Usage								
QTY01	673	<b>Quantity Qualifier</b> <b>Description:</b> Code specifying the type of quantity	M	ID	2/2	Must Use								
		<table border="0"> <tr> <td style="padding-right: 20px;"><u>Code</u></td> <td><u>Name</u></td> </tr> <tr> <td>87</td> <td>Quantity Received. <b>Description:</b> Used to indicate power flow into the grid.</td> </tr> <tr> <td>QD</td> <td>Quantity Delivered. <b>Description:</b> Used to indicate power flow out of the grid.</td> </tr> </table>	<u>Code</u>	<u>Name</u>	87	Quantity Received. <b>Description:</b> Used to indicate power flow into the grid.	QD	Quantity Delivered. <b>Description:</b> Used to indicate power flow out of the grid.						
<u>Code</u>	<u>Name</u>													
87	Quantity Received. <b>Description:</b> Used to indicate power flow into the grid.													
QD	Quantity Delivered. <b>Description:</b> Used to indicate power flow out of the grid.													
		<b>Note:</b> No other codes are supported in this implementation at this time. The full UIG EDI-867 specification does allow for other codes.												
QTY02	380	<b>Quantity</b> <b>Description:</b> Numeric value of quantity	C	R	1/15	Must Use								
QTY03	C001	<b>Composite Unit of Measure</b> <b>Description:</b> To identify a composite unit of measure.	O	Comp		Used								
	355	<b>Unit or Basis for Measurement Code</b> <b>Description:</b> Code specifying the units in which a value is being expressed, or manner in which a measurement has been taken	M	ID	2/2	Must Use								
		<table border="0"> <tr> <td style="padding-right: 20px;"><u>Code</u></td> <td><u>Name</u></td> </tr> <tr> <td>68</td> <td>Amperes <b>Description:</b> Amperes squared hours. Note: If this value is reported on multiple channels for the same meter, it can be assumed to be per phase. Also, this usage of Measurement Code 68 is non-standard.</td> </tr> <tr> <td>70</td> <td>Volts <b>Description:</b> Volts squared hours. Note: If this value is reported on multiple channels for the same meter, it can be assumed to be per phase. Also, this usage of Measurement Code 70 is non-standard.</td> </tr> <tr> <td>K3</td> <td>Kilovolt Amperes Reactive Hour (KVARH) <b>Description:</b> The total reactive energy delivered to the load, the product of reactive power (kVAR) and the length of time (hours). Reactive energy is energy that cannot perform any work.</td> </tr> </table>	<u>Code</u>	<u>Name</u>	68	Amperes <b>Description:</b> Amperes squared hours. Note: If this value is reported on multiple channels for the same meter, it can be assumed to be per phase. Also, this usage of Measurement Code 68 is non-standard.	70	Volts <b>Description:</b> Volts squared hours. Note: If this value is reported on multiple channels for the same meter, it can be assumed to be per phase. Also, this usage of Measurement Code 70 is non-standard.	K3	Kilovolt Amperes Reactive Hour (KVARH) <b>Description:</b> The total reactive energy delivered to the load, the product of reactive power (kVAR) and the length of time (hours). Reactive energy is energy that cannot perform any work.				
<u>Code</u>	<u>Name</u>													
68	Amperes <b>Description:</b> Amperes squared hours. Note: If this value is reported on multiple channels for the same meter, it can be assumed to be per phase. Also, this usage of Measurement Code 68 is non-standard.													
70	Volts <b>Description:</b> Volts squared hours. Note: If this value is reported on multiple channels for the same meter, it can be assumed to be per phase. Also, this usage of Measurement Code 70 is non-standard.													
K3	Kilovolt Amperes Reactive Hour (KVARH) <b>Description:</b> The total reactive energy delivered to the load, the product of reactive power (kVAR) and the length of time (hours). Reactive energy is energy that cannot perform any work.													

Ref	Id	Element Name	Req	Type	Min/Max	Usage
-----	----	--------------	-----	------	---------	-------

KH Kilowatt Hour (KWH)

**Description:** The total real energy delivered to the load, the accumulation of the product of real power (KW) and time in hours. Real energy is energy that can perform actual work.

**Note:** No other codes are supported in this implementation at this time. The full UIG EDI-867 specification does allow for other codes.

**Example:**

QTY\*QD\*152.71\*KH

DRAFT

# MEA Measurements

Pos: 160	Max: 1
Detail - Optional	
Loop: QTY	Elements: 7

This segment is used to specify physical measurements or counts, including dimensions, tolerances, variances, and weights.

## Syntax:

1. At least one of MEA03, MEA05, MEA06 is required.
2. If MEA07 is present, then at least one of MEA03, MEA05 or MEA06 is required.

## Semantics:

1. MEA04 defines the unit of measure for MEA03, MEA05, and MEA06.

## Comments:

1. On the MEA record, the beginning and ending read are always provided for all KH and K3 type measurements, except interval reads.
2. On the MEA record, when interval reads are being provided the interval pulse count may be provided in MEA06.
3. MEA05 and MEA06 will not be used by the Independent Electricity System Operator.
4. The first QTY loop must contain a MEA segment.
5. It is not necessary to provide an MEA segment for each subsequent QTY loop. Add an MEA segment only when the attributes of the measurement change.

## Element Summary:

Ref	Id	Element Name	Req	Type	Min/Max	Usage
MEA01	737	<b>Measurement Reference ID Code</b> <b>Description:</b> Defines the quality of the meter read defined in MEA05 & MEA06.	O	ID	2/2	Used
		<u>Code Name</u> The following four codes are required for monthly usage reads to qualify fields five and six. Not used for interval reads.				
		AA Meter reading-beginning actual/ending actual				
		AE Meter reading-beginning actual/ending estimated				
		EA Meter reading-beginning estimated/ending actual				
		EE Meter reading-beginning estimated/ending estimated				

**Note:** This field will not be used in data transfers from the Independent Electricity System Operator.

Ref	Id	Element Name	Req	Type	Min/Max	Usage
MEA02	738	<b>Measurement Qualifier</b> <b>Description:</b> Code identifying a specific product or process characteristic to which a measurement applies  <u>Code Name</u> MU Multiplier  <b>Required for non -interval usage.</b>  <b>Note:</b> No other codes are supported in this implementation at this time. The full UIG EDI-867 specification does allow for other codes.	O	ID	1/3	Used
MEA03	739	<b>Measurement Value</b> <b>Description:</b> The value of the measurement and only used if MEA02=MU <b>User Note 1:</b> Represents the meter constant when MEA02 = "MU". When no multiplier is present, use a value of "1".	C	R	1/20	Used
MEA04	C001	<b>Composite Unit of Measure</b> <b>Description:</b> To identify a composite unit of measure	C	Comp		Used
	355	<b>Unit or Basis for Measurement Code</b> <b>Description:</b> Code specifying the units in which a value is being expressed, or manner in which a measurement has been taken. This should be the same as that found on the QTY record.  <u>Code Name</u> 68 Amperes <b>Description:</b> Amperes squared hours. Note: If this value is reported on multiple channels for the same meter, it can be assumed to be per phase. Also, this usage of Measurement Code 68 is non-standard.  70 Volts <b>Description:</b> Volts squared hours. Note: If this value is reported on multiple channels for the same meter, it can be assumed to be per phase. Also, this usage of Measurement Code 70 is non-standard.  K3 Kilovolt Amperes Reactive Hour (KVARH) <b>Description:</b> The total reactive energy delivered to the load, the product of reactive power (kVAR) and the length of time (hours). Reactive energy is energy that cannot perform any work.  KH Kilowatt Hour (KWH) <b>Description:</b> The total real energy delivered to the load, the product of real power (KW) and length of time (hours). Real energy is energy that can perform actual work.	M	ID	2/2	Must Use

Ref	Id	Element Name	Req	Type	Min/Max	Usage
MEA07	935	<b>Measurement Significance Code</b>	O	ID	2/2	Used

**Description:** Code used to benchmark, qualify or further define usage conveyed in QTY02.


**Code Name**

- 03 Approximately – used for readings created through meter disaggregation or compliance aggregation.
- 22 Actual – normal usage passed validation (included non-metered)
- 39 Substitute – plugging from alternate Meter
- 46 Estimated – estimated usage.
- 88 Edited

**Note:** No other codes are supported in this implementation at this time. The full UIG EDI-867 specification does allow for other codes.

**Example:**

MEA\*\*MU\*12000.0\*KH\*\*\*22

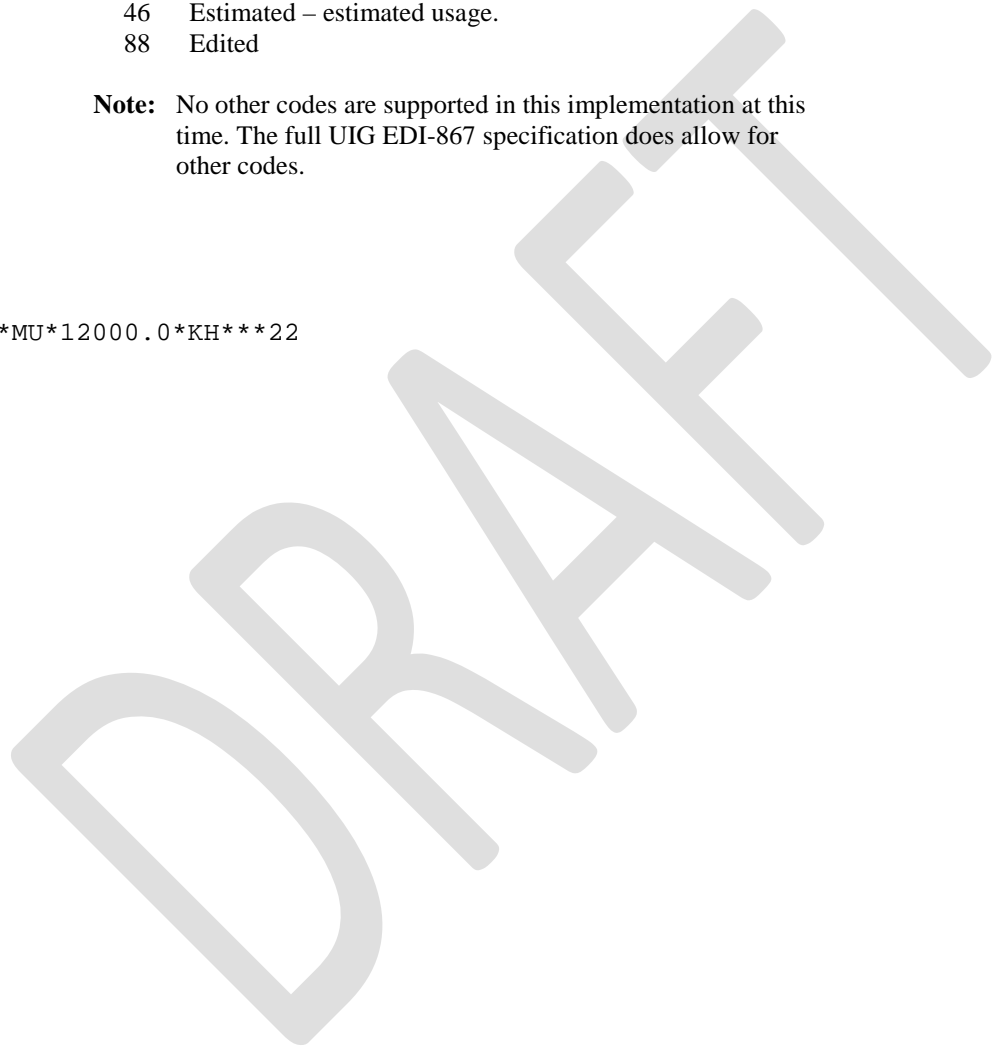

# REF Reference Identification

Pos: 190	Max: 2
Detail - Optional	
Loop: QTY	Elements: 3

This segment is used to specify identifying information.

## Syntax:

- At least one of REF02 or REF03 is required.

## Notes:

- This segment is required when the MEA07 = 46 (estimated) or when MEA07= 31 (calculated).
- When MEA07 = 46, REF02 must be populated.

## Element Summary:

Ref	Id	Element Name	Req	Type	Min/Max	Usage
REF01	128	<b>Reference Identification Qualifier</b> <b>Description:</b> Code qualifying the Reference Identification – Estimation Type Code  <u>Code Name</u> ESN Estimate Sequence Number	M	ID	2/3	Must Use
REF02	127	<b>Reference Identification</b> <b>Description:</b> Reference information as defined for a particular Transaction Set or as specified by the Reference Identification Qualifier. These codes are specific to the Independent Electricity System Operator. When MEA07=46 (estimated), this field contains the type of estimation performed.  <u>Code Name</u> HISTORICAL Historical Estimation LINEAR Linear Point to Point Interpolation REDUNDANT Data Substituted from an alternate Meter	C	AN	1/30	Used

## Example:

REF\*ESN\*HISTORICAL\*

# DTM Date/Time Reference

Pos: 210	Max: 2
Detail - Optional	
Loop: QTY	Elements: 3

This segment is used to specify pertinent dates and times.

## Syntax:

1. If either DTM05 or DTM06 is present, then the other is required.

## Notes:

1. Date Time Entries are provided in Eastern Standard Time.

## Comments:

1. The first QTY loop must contain a set of DTM segments.
2. It is not necessary to provide a set of DTM segments for subsequent QTY loops. Add a set of DTM segments only when there is a gap in interval data.

## Element Summary:

Ref	Id	Element Name	Req	Type	Min/Max	Usage
DTM01	374	<b>Date/Time Qualifier</b> <b>Description:</b> Code specifying type of date or time, or both date and time	M	ID	3/3	Must Use
		<u>Code Name</u> 150 Service Period Start (Interval Start) 151 Service Period End (Interval End)				
DTM05	1250	<b>Date Time Period Format Qualifier</b> <b>Description:</b> Code indicating the date format, time format, or date and time format	C	ID	2/3	Must Use
		<u>Code Name</u> D8 Date Expressed in Format CCYYMMDD When D8 is used the time is assumed to default to 0000. DT Date and Time Expressed in Format CCYYMMDDHHMM				
DTM06	1251	<b>Date Time Period</b> <b>Description:</b> Expression of a date, a time, or range of dates, times or dates and times.	C	AN	1/35	Used

## Example:

```
DTM*150****DT*200007180000
DTM*151****DT*200007180005
```



# SE

## Transaction Set Trailer

Pos: 030	Max: 1
Summary - Mandatory	
Loop: N/A	Elements: 2

To indicate the end of the transaction set and provide the count of the transmitted segments (including the beginning (ST) and ending (SE) segments).

### Comments:

1. SE is the last segment of each transaction set.

### Element Summary:

Ref	Id	Element Name	Req	Type	Min/Max	Usage
SE01	96	<b>Number of Included Segments</b> <b>Description:</b> Total number of segments included in a transaction set including ST and SE segments	M	NO	1/10	Must Use
SE02	329	<b>Transaction Set Control Number</b> <b>Description:</b> Identifying control number that must be unique within the transaction set functional group assigned by the originator for a transaction set	M	AN	4/9	Must Use

### Example:

SE\*1136\*0001

# GE

## Functional Group Trailer

Pos:	Mandatory	Max: 1
Loop: N/A	Elements: 2	

This segment is used to indicate the end of a functional group and to provide control information.

### Semantics:

1. The data interchange control number GE02 in this trailer must be identical to the same data element in the associated functional group header, GS06.

### Comments:

1. The use of identical data interchange control numbers in the associated functional group header and trailer is designed to maximize functional group integrity. The control number is the same as that used in the corresponding header.

### Element Summary:

Ref	Id	Element Name	Req	Type	Min/Max	Usage
GE01	97	<b>Number of Transaction Sets Included</b> <b>Description:</b> Total number of transaction sets included in the functional group or interchange (transmission) group terminated by the trailer containing this data element	M	NO	1/6	Must Use
GE02	28	<b>Group Control Number</b> <b>Description:</b> Assigned number originated and maintained by the sender.	M	NO	1/9	Must Use

### Example:

GE\*1\*636

# IEA

## Interchange Control Trailer

Pos:	Mandatory	Max: 1
Loop: N/A	Elements: 2	

To define the end of an interchange of zero or more functional groups and interchange-related control segments.

### Element Summary:

Ref	Id	Element Name	Req	Type	Min/Max	Usage
IEA01	I16	<b>Number of Included Functional Groups</b> <b>Description:</b> A count of the number of functional groups included in an interchange.	M	NO	1/5	Must Use
IEA02	I12	<b>Interchange Control Number</b> <b>Description:</b> A control number assigned by the interchange sender.	M	NO	9/9	Must Use

### Example:

IEA\*1\*636362649

- End of Section -

## References

Document Title	Document ID

## Related Documents

Document Title	Document ID

- End of Document -

DRAFT