

---

## Market Manual 14: Market Power Mitigation

# Part 14.2: Reference Level and Reference Quantity Procedures

---

Issue **45.0**

~~July 14~~ **December 20, 2022**

This *market manual* is provided for stakeholder engagement purposes. Please note that additional changes to this document may be incorporated as part of future engagement in MRP or other *IESO* activities prior to this *market manual* taking effect.

This procedure describes the activities to be undertaken by the *IESO* and *market participants* to complete the *reference level* and *reference quantity* procedures required to participate in the *day-ahead market* and the *real-time market*.

## Document Change History

Issue	Reason for Issue	Date
1.0	Draft for Stakeholder Review	August 12, 2021
2.0	Updated after considering external stakeholder review	December 17, 2021
3.0	Updated to incorporate external stakeholder review	July 14, 2022
<a href="#">4.0</a>	<a href="#">Updated to reflect Market Renewal Program procedures as part of the Interim Alignment Batch</a>	<a href="#">September 9, 2022</a>
<a href="#">5.0</a>	<a href="#">Updated to reflect Market Renewal Program procedures as part of the Interim Alignment Batch</a>	<a href="#">December 20, 2022</a>

## Related Documents

Document ID	Document Title
TBD	Market Manual 14.1: Market Power Mitigation Procedures

# Table of Contents

<b>Table of Contents</b> .....	<b>i</b>
List of Figures .....	iii
List of Tables .....	iii
Market Manual Conventions .....	iv
1. Introduction .....	1
1.1. Purpose.....	1
1.2. Scope .....	1
1.3. Roles and Responsibilities.....	2
1.4. Contact Information .....	3
2. Overview of Reference Levels and Reference Quantities .....	4
2.1. Reference Levels .....	4
2.2. Reference Quantities.....	6
3. Determining and Updating Reference Levels and Reference Quantities .....	8
3.1. Historical Study Period .....	8
3.2. Supporting Documentation.....	10
3.3. Procedure Initiation by the Market Participant .....	12
3.4. Procedure Initiation by the IESO.....	15
3.5. Independent Review .....	16
4. Reference Level and Reference Quantity Reports .....	19
4.1. Reference Level Value Reporting .....	19
4.2. Reference Quantity Value Reporting .....	20
5. Temporary Reference Level Change Requests.....	22
5.1. Request Timing .....	22
5.2. Supporting Documentation.....	22
5.3. Use of Higher Fuel Cost Component or an Alternate Cost Profile .....	23
5.4. Documentation Following Use of Alternate Cost Profile Reference Levels	24
5.5. IESO Review of Documentation and Response to Market Participants.	24
6. Cost Components of Financial Dispatch Data Parameters .....	25
6.1. Costs Related to Fuel .....	25
6.2. Costs Related to Emissions .....	25
6.3. Costs Related to Operating and Maintenance.....	25
6.4. Opportunity Costs.....	29
6.5. Costs Related to Start-Up Offers .....	54
6.6. Costs Related to Speed No-Load Offers .....	55
6.7. Costs Related to Operating Reserve Offers .....	55
7. Reference Levels for Financial Dispatch Data Parameters.....	57

7.1. Thermal .....	57
7.2. Hydroelectric .....	82
7.3. Solar.....	91
7.4. Wind.....	92
7.5. Nuclear .....	94
7.6. Electricity Storage .....	101
7.7. Dispatchable Loads .....	109
7.8. Accounting for Currency Exchange .....	114
7.9. Late Day Start Reference Levels .....	114
7.10. Alternate Data for Calculating Reference Level Values .....	115
8. Reference Levels for Non-Financial Dispatch Data Parameters .....	117
8.1. Descriptions of Non-Financial Dispatch Data Parameter Reference Levels .....	117
8.2. Thermal .....	119
8.3. Hydroelectric .....	124
8.4. Solar.....	125
8.5. Wind.....	125
8.6. Nuclear .....	125
8.7. Electricity Storage .....	125
8.8. Dispatchable Loads for Operating Reserve .....	126
9. Reference Quantities .....	127
9.1. Thermal .....	127
9.2. Hydroelectric .....	128
9.3. Solar.....	129
9.4. Wind.....	130
9.5. Nuclear .....	130
9.6. Electricity Storage .....	130
9.7. Dispatchable Load .....	130
List of Acronyms .....	134
References .....	135

## List of Figures

Figure 5-1: DAM Reference Level Change Request Window.....	22
Figure 5-2: Real-Time Market Reference Level Change Request Window for HE12 .....	22

## List of Tables

Table 2-1: Reference Levels for Non-Financial Dispatch Data Parameters .....	5
Table 3-1: Market Participant Request Type for Reference Level or Reference Quantity Changes .....	13
Table 6-1: Example of Determining the Storage Horizon .....	35
Table 6-2: Example of Defining Forecast and Reference Storage Horizon Dates .....	37
Table 6-3: Example of Efficiency Calculation.....	40
Table 6-4: Step 1 of Multiple Units Efficiency Calculation Example.....	41
Table 6-5: Step 2 of Multiple Units Efficiency Calculation Example.....	41
Table 6-6: Step 3 of Multiple Units Efficiency Calculation Example.....	42
Table 6-7: Example of Requesting Forebay Refill Opportunity Cost for a Cascade Group Resource .....	47
Table 6-8: Step 1 Example of Determining the Refill Time for Resources in a Cascade Group .....	51
Table 6-9: Step 2 Example of Determining the Refill Time for Resources in a Cascade Group .....	51
Table 6-10: Step 3 Example of Determining the Refill Time for Resources in a Cascade Group .....	52
Table 6-11: Step 4 Example of Determining the Refill Time for Resources in a Cascade Group .....	52
Table 6-12: Step 4 Example of Determining the Refill Time for Resources in a Cascade Group .....	53
Table 7-1: Example of EOH Methodology Illustrative.....	88
Table 7-2: Example of Cascade Group Hydroelectric Resource Reference Level Value Methodology .....	90

## Market Manual Conventions

This *market manual* uses the following standard conventions:

- The word 'shall' denotes a mandatory requirement;
- References to *market rule* sections and sub-sections may be abbreviated in accordance with the following representative format: '**MR Ch.1 ss.1.1-1.2**' (i.e. *market rules*, Chapter 1, sections 1.1 to 1.2).
- References to *market manual* sections and sub-sections may be abbreviated in accordance with the following representative format: '**MM 1.5 ss.1.1-1.2**' (i.e. *market manual* 1.5, sections 1.1 to 1.2).
- Internal references to sections and sub-sections within this manual take the representative format: 'sections 1.1 – 1.2'
- Terms and acronyms used in this *market manual* in its appended documents that are italicized have the meanings ascribed thereto in **MR Ch.11**;
- All user interface labels and options that appear on the *IESO* gateway and tools are formatted with the bold font style;
- Double quotation marks are used to indicate titles of legislation, publications, forms and other documents;
- Any procedure-specific convention(s) shall be identified within the relevant appended procedure document; and
- For the purposes of determining *reference levels* and *reference quantities*, *resources* are classified according to the technology types at the *facilities* of the *resource*. This classification impacts how *reference levels* and *reference quantities* are determined for that *resource*. *Resources* that have *facilities* of a particular technology type are denoted as *resources* of that technology type. For example, *resources* that have *generation facilities* that are primarily fueled by natural gas, biomass or oil are referred to as "thermal *resources*".

# 1. Introduction

This *market manual* describes how the *IESO* determines *reference levels* and *reference quantities* for *dispatchable resources*. Determining *reference levels* and *reference quantities* for a *resource* is a prerequisite for *dispatchable generation resources*, *dispatchable loads*, and *dispatchable energyelectricity storage resources* to participate in the *energy* and *operating reserve markets*.

The *IESO's* assessment and mitigation of the exercise of market power, including testing and any related step by the *IESO*, shall not constitute a review for compliance with any *market rule*, including **MR Ch. 1, s. 10A** or **s. 11**.

## 1.1. Purpose

This manual provides details with respect to the procedures for determining *reference levels* and *reference quantities* and details the procedures that apply to the submission, review, and registration of these *reference levels* and *reference quantities*. It also describes the procedures related to requesting updates to *reference levels* prior to the close of the submission window of the *day-ahead market* and the *mandatory window* of the *real-time market*.

## 1.2. Scope

### 1.2.1. Determining and Updating Reference Levels and Reference Quantities

[Section 3](#) describes the procedures used to determine and update *reference levels* and *reference quantities* for a *resource* and the documentation that may be used to support a requested *reference level* or *reference quantity*.

[Section 4](#) describes the reports that the *IESO* uses to inform *market participants* of the *reference level values* and *reference quantity values*.

[Section 6](#) describes the cost components that may be included when requesting a *reference level* for a *financial dispatch data parameter*.

[Section 7](#) describes, according to generation technology type, how the *IESO* determines *reference levels* for a *resource's financial dispatch data parameters*.

[Section 8](#) describes, according to generation technology type, how the *IESO* determines *reference levels* for a *resource's non-financial dispatch data parameters*.

[Section 9](#) describes, according to generation technology type, how the *IESO* determines a *resource's reference quantities*.

## 1.2.2. Temporary Changes to Reference Levels

[Section 5](#) describes the procedures regarding how a *market participant* may request temporary changes to a *reference level* and the documentation required to support such a request.

## 1.2.3. Related Documents

*Reference levels* and *reference level values* are used to assess ex-ante market power mitigation. For the *market rules* that apply to the ex-ante market power mitigation processes, refer to **MR Ch.7 s. 22.14, Appendix 7.1A** and **Appendix 7.2A**.

*Reference quantities* and *reference quantity values* are used to assess ex-post market power mitigation for *physical withholding*. For the *market rules* that apply to ex-post market power mitigation for *physical withholding*, refer to **MR Ch. 7, s. 22**. For the *market manual* that applies to ex-post mitigation, refer to [MM 14.1: Market Power Mitigation Procedures](#). *Intertie reference levels*, which are determined to assess *intertie economic withholding*, are also described in [MM 14.1: Market Power Mitigation Procedures](#).

For a detailed description of *settlement* mitigation process, refer to [Market Manual 5, Part MM 5.5: Physical Market Settlement Statements](#).

## 1.3. Roles and Responsibilities

This *market manual* provides information related to:

- the determination and maintenance of *reference levels* and *reference quantities*; and
- requesting updates to *reference levels*.

The responsibilities of the *IESO* include the following activities:

- reviewing *market participant* submissions related to:
  - the determination of reference levels for financial dispatch data parameters, reference levels for non-financial dispatch data parameters and reference quantities; and
  - updates to day-ahead market and real-time market reference levels;
- the maintenance of the methodologies used for determining *reference levels* and *reference quantities* providing *market participants* with the *IESO's preliminary view*;
- registering *resource-specific reference levels* and *reference quantities*; and
- *publishing* and updating reports related to *reference level* and *reference quantity values*.

The responsibilities of the *market participant* include the following activities:



- submitting documentation to support *reference levels* and *reference quantities*;
- reviewing the *reference levels* and *reference quantities* in the *IESO's preliminary view*; and
- reviewing *published reference level* and *reference quantity* reports.

## 1.4. Contact Information

Changes to this *market manual* are managed via the [IESO Change Management process](#). Stakeholders are encouraged to participate in the evolution of this *market manual* via this process.

To contact the *IESO*, you can email *IESO* Customer Relations at [customer.relations@ieso.ca](mailto:customer.relations@ieso.ca) or use telephone or mail. Telephone numbers and the mailing address can be found on the [IESO website](#). *IESO* Customer Relations staff will respond as soon as possible.

**— End of Section —**

## 2. Overview of Reference Levels and Reference Quantities

(MR Ch. 7, ss. 22.1–22.4)

### 2.1. Reference Levels

(MR Ch. 7, ss. 22.2–22.4)

The IESO uses information supplied by a *market participant* to determine the *reference levels* for the *resources* registered under that *market participant*.

The IESO determines *reference levels* for *financial dispatch data parameters* and *non-financial dispatch data parameters* of each *resource*.

*Reference levels* for *financial dispatch data parameters* are described in more detail in [section 6](#) and [section 7](#). *Reference levels* for *non-financial dispatch data parameters* are explained further in [section 8](#).

If the inputs for a *resource* vary with season, the *reference levels* for that *resource* may also vary according to season. The summer period is from May 1<sup>st</sup> to October 31<sup>st</sup> and the winter period is from November 1<sup>st</sup> to April 30<sup>th</sup> of the following year.

#### 2.1.1. Reference Levels for Financial Dispatch Data Parameters

(MR Ch. 7, s. 22.2)

When requesting *energy offer reference levels* and *operating reserve offer reference levels*, a *market participant* must indicate the cost components that vary with increased supply. Where a cost component varies with increased supply, the relevant *reference level* requires multiple laminations and the *market participant* must demonstrate its costs accordingly. The formulas the IESO uses to determine *energy offer*, *speed no-load offer*, *start-up offer*, and *operating reserve offer reference levels* are described in [section 7](#).

A *market participant* may request a *reference level* of \$0 for a *financial dispatch data parameter*. No supporting documentation is required to support a *reference level* of \$0.

#### 2.1.2. Reference Levels for Non-Financial Dispatch Data Parameters

(MR Ch. 7, s. 22.3)

A *resource's reference levels* for *non-financial dispatch data parameters* represent the IESO's determination of the *resource's* operating characteristics in *unrestricted competition*.

Table 2-1 lists the *reference levels* for *non-financial dispatch data parameters* that are applicable to each *resource*.

**Table 2-1: Reference Levels for Non-Financial Dispatch Data Parameters**

Registered Reference Level Name	Reference Level Registered For
Energy Ramp Rate Reference Level	<ul style="list-style-type: none"> <li>Dispatchable generation resources</li> <li>Dispatchable <del>energy</del>electricity storage resources</li> </ul>
Operating Reserve Ramp Rate Reference Level (A single <i>reference level</i> is used to validate all applicable classes of <i>operating reserve ramp rates</i> )	<ul style="list-style-type: none"> <li>Dispatchable generation resources</li> <li>Dispatchable loads</li> <li>Dispatchable <del>energy</del>electricity storage resources</li> </ul>
Lead Time Reference Level (for each <i>thermal state</i> )	<i>Non-quick start resources</i>
Minimum Loading Point Reference Level	<i>Non-quick start resources</i>
Minimum Generation Block Run-Time Reference Level	<i>Non-quick start resources</i>
Minimum Generation Block Down Time Reference Level (for each <i>thermal state</i> )	<i>Non-quick start resources</i>
Maximum Number Of Starts per Day Reference Level	<ul style="list-style-type: none"> <li><i>Non-quick start resources</i></li> <li>Dispatchable hydroelectric generation resources</li> </ul>
Energy per Ramp Hour Reference Level (for each <i>thermal state</i> )	<i>Non-quick start resources</i>
Ramp Hours To MLP Reference Level (for each <i>thermal state</i> )	<i>Non-quick start resources</i>

### 2.1.3. Resources with Alternate Cost Profile Sets of Reference Levels (MR Ch. 7, sections 22.4.3 and 22.4.4)

For *resources* that have an alternate cost profile sets of *reference levels* determined pursuant to **MR Ch. 7, s. 22.4.3**, the lower-cost profile *reference levels* will be used during the *dispatch hours* when a submitted *offer* is tested for *economic withholding*.

The *IESO* determines the lower-cost profile *reference levels* based on the total hourly *reference level* cost of operating the *resource* at maximum capacity using each set of *reference levels* as follows:

$$\text{Total Hourly Cost}_{h,b} = \sum_{k=1}^{N_{h,b}} P_{h,b,k} \times Q_{h,b,k} + \left( \frac{SU_{ref_{h,b}}}{MGBRT_{ref_b}} \right) + SNL_{ref_{h,b}}$$

Where:

- $K_{h,b}$  designates the set of *energy offer reference level* laminations for *resource b* for hour  $h \in \{1, \dots, 24\}$
- $N_{h,b}$  designates the number of laminations for each set of *energy offer reference level* laminations for *resource b* for hour  $h \in \{1, \dots, 24\}$
- $P_{h,b,k}$  is the *energy offer reference level* price segment of the *price-quantity pair* in hour  $h \in \{1, \dots, 24\}$  in association with *energy offer reference level* lamination  $k \in K_{h,b}$
- $Q_{h,b,k}$  is the *energy* quantity segment of the *price-quantity pair* in hour  $h \in \{1, \dots, 24\}$  in association with *energy offer reference level* lamination  $k \in K_{h,b}$
- $SU_{ref_{h,b}}$  is the *start-up offer reference level* in association with hour  $h \in \{1, \dots, 24\}$  for *resource b*
- $MGBRT_{ref_b}$  is the *minimum generation block run-time reference level*
- $SNL_{ref_{h,b}}$  is the *speed no-load offer reference level* in association with hour  $h \in \{1, \dots, 24\}$  for *resource b*

## 2.2. Reference Quantities

(MR Ch. 7, section 22.6)

The *IESO* determines estimates for what quantity a *market participant* might offer for their *resources* in the *energy* and *operating reserve* markets in *unrestricted competition*. These estimates are called *reference quantity values*. The *IESO* uses *reference quantity values* in the assessment of *physical withholding*.

The *IESO* determines *reference quantity values* for a *dispatch day* in accordance with the methodologies in [section 9](#). The inputs used by the *IESO* to determine *reference quantity values* vary according to the *resource's* technology type. Inputs required for the calculation of *reference quantity values* may vary seasonally. The *market participant* must submit separate summer and winter values for *parameters* and inputs used in the determination of *reference quantity values*, where applicable.

[Section 9](#) describes the methodologies that the *IESO* uses to determine *reference quantities* for *resources* of different technology types and the applicable supporting documentation that a *market participant* must submit to support requested *reference quantities*.

If the default methodology for calculating *reference quantities* that is detailed in [Section 9](#) of **MM 14.2** does not account for the specific operational characteristics of a *resource* in a complete manner, *market participants* may submit requests for *reference quantity* modifiers. *Market participants* can request modifiers per calendar month to reflect *resource*-specific limits. If the limit affects the *resource* year-round, the same modifier may be requested for the entire year. *Market participants* must submit supporting documentation for *IESO* review and approval in support of the requested modifier(s). Once approved, the modifier will be added/subtracted to the calculated *reference quantities*.

**— End of Section —**

## 3. Determining and Updating Reference Levels and Reference Quantities

(MR Ch. 7, ss. 22.1-22.8)

The *IESO* must determine *reference levels* and *reference quantities* for a *resource* before that *resource* is permitted to participate in the *energy* and *operating reserve* markets. This section defines the procedures used to determine a *resource's reference levels* and *reference quantities* and, if required, to update them.

The *IESO* determines the *reference levels* and *reference quantities* for a *resource* depending on the technology type of the *resource*, as further specified below.

For *resources* that have multiple *facilities* of different technology types, the *IESO* determines the contribution to each *reference level* or *reference quantity* for each *facility* of the *resource* as further specified below.

The *IESO* uses technology-specific methodologies to determine *reference levels* and *reference quantities*. During the registration procedures as described in [Market Manual 1.5](#), a *market participant* must submit information to support requested *reference levels* or *reference quantities*. *Reference level* workbooks by technology type are available on the *IESO's* website for a *market participant* to input values for *reference level* components and to log supporting documentation.

The *IESO* uses the supporting documentation submitted by a *market participant* to review and assess the *market participant*-requested *reference levels* or *reference quantities*. [Section 3.2](#) outlines the acceptable types of supporting documentation. [Section 7](#) and [section 8](#) outline technology-specific requirements for supporting documentation.

[Sections 3.3](#) and [3.4](#) detail the processes used from initiation to registration completion of *reference levels* and *reference quantities*. Once registered, *IESO*-determined *reference levels* and *reference quantities* will not change except in accordance with **MR Ch. 7, ss. 22.5** and **22.7**.

### 3.1. Historical Study Period

(MR Ch. 7, section 22.1.3)

The historical study period is the lookback period that is used when providing supporting documents to support a *reference level* or a *reference quantity* requested for a *resource*. Data describing costs incurred or operation during the historical study period are acceptable documentation to support a *reference level* or a *reference quantity* requested for a *resource*, as further specified in this *market manual*.

Information to support requested *reference level* for *financial dispatch data parameters* are based on the relevant historical study periods stated in the technology-specific approaches in [section 7](#).

If available, a *market participant* must use historical cost information spanning the historical study period from [section 7](#) when calculating the contribution of a cost to a *reference level*. If cost information for the suggested historical study period is not available, but there is at least one year of cost information available, the *market participant* must use all of the available cost information when determining the contribution of a cost to a *reference level*. If cost information is not available for at least one year and an alternate methodology is not indicated in [section 7](#), the *market participant* may submit one or more of the following forms of documentation to support a requested cost:

- forecasted costs associated with eligible maintenance activities in accordance with the original equipment manufacturer (OEM) recommended maintenance intervals or accepted industry practices;
- independent third-party average cost information applicable for the technology type of the *resource*; or
- certified documentation from the OEM or vendor.

Unless otherwise specified in [section 7](#), to determine the contribution of a cost to a *reference level*, a *market participant* must perform the following steps:

1. Calculate the total annual eligible costs for each year in the historical study period.
2. Calculate the number of relevant events that occurred during each year of the historical study period:
  - a. the relevant event for an *energy offer reference level* is MWh injected in a year;
  - b. the relevant event for *start-up offer reference level* is the number of starts in a year;
  - c. the relevant event for *speed no-load offer reference level* is the number of hours where the *resource* was operating during the year; and
  - d. the relevant event for an *operating reserve offer reference level* is the *operating reserve* MWh scheduled in a year.
3. Calculate the annual contribution per eligible cost by dividing the total annual eligible costs per year by the number of relevant events per year in the historical study period used.
4. Calculate the number per eligible cost by calculating the average of the annual contributions across the historical study period.

A *market participant* must indicate the historical study period used when requesting *reference levels* and *reference quantities* for a *resource*. The *IESO* will assess the appropriateness of an alternate historical study period. The *IESO* may reject the use of an alternate historical study period if, in the *IESO's* opinion, the requested historical study period does not reflect the *resource's* current operating conditions.

## 3.2. Supporting Documentation

(MR Ch. 7, ss. 22.1.3, 22.5.2, 22.6.3, 22.6.5, 22.6.7, 22.7.2, 22.15.21.1, 22.15.22, 22.15.24.2, 22.19.2, 22.19.3)

This section describes the acceptable forms of documentation that a *market participant* may submit to support a *reference level* or a *reference quantity* requested for a *resource*. Technology-specific supporting documentation is identified in [section 7](#).

Acceptable forms of supporting documentation include, but are not limited to, the following:

- *metering data*;
- electricity bills;
- materials from vendors regarding operations, including, but not limited to, information on the following:
  - *resource* efficiency and performance data;
  - equipment test data; and
  - relevant sections from operating and maintenance (O&M) manuals;
- vendor data on vendor letterhead and datasheets. If details are insufficient, the *IESO* may request additional information to be supplied by the vendor;
- relevant contracts for equipment supply or service provision. Where only a portion of the total costs in a contract is eligible to be included in a *reference level*, a *market participant* must report the portion of total costs attributed to the *reference level*. The determination of eligible costs in a contract must come from either a cost breakdown in the contract or in a written communication from the service provider;
- paid *invoices* from contractors or vendors for services or products related to eligible costs. Amounts in historical *invoices* may be adjusted for inflation if appropriate from when the cost was paid to what the service or product would cost in the current market based on an appropriate third-party index, including the Consumer Price Index;
- vendor quotation for a firm commitment that provides details on the scope of services or parts being supplied. These details must provide sufficient information for the *IESO* to ascertain whether the quoted costs are eligible for inclusion in the determination of the *reference level*; and



- any other documentation that is required to support the *market participant*-submitted data in the *reference level* workbook.

Where documentation from the above list is not available, documentation developed by the *market participant* may be submitted. This documentation will be evaluated on a case-by-case basis by the *IESO*. When determining the eligibility of documentation developed by the relevant *market participant*, the *IESO* may compare the documentation to information for similar types of equipment. A *market participant* must include detailed explanations of how each piece of documentation supports the relevant input. If a requested *reference level* requires the *IESO* to convert values from one unit of measurement to another, the *market participant* must submit documentation that describes the relevant conversion factors.

The *IESO* will not accept supporting documentation that:

- is illegible;
- is not from a reputable third party;
- is for costs that are not eligible costs;
- includes incomplete information; or
- relies on vague or unclear information to support the values entered into the calculation sheets.

The *IESO* may request that a *market participant* submit additional information and may review any other information it deems relevant for completeness, eligibility and correctness. Relevant information may include, but is not limited to, *market participant*-registered data, research papers, reports, news articles and publicly available information.

### 3.2.1. Supporting Documentation Exemptions

Supporting documentation is not required:

- to determine *energy* ramp rate *reference levels* where the requested value does not limit the *resource* to producing *energy* below its maximum generating capability for an interval:
  - if the submitted *energy* ramp rate *reference level value* is greater than or equal to 1/5<sup>th</sup> of the maximum capacity of the *resource*; or
  - if the submitted *energy* ramp rate *reference level* is equal to the *resource's* registered maximum *energy offer* ramp rate;
- to determine *operating reserve* ramp rate *reference levels* where the requested value does not limit the *resource* to producing *operating reserve* below its maximum generating capability for an interval:
  - for a *resource* that is registered as being able to supply *ten-minute operating reserve*, if the submitted *operating reserve* ramp rate *reference*

- *level value* is greater than or equal to  $1/10^{\text{th}}$  of the maximum *operating reserve* that the *resource* can provide;
- for a *resource* that is registered as being able to supply *thirty-minute operating reserve*, but not *ten-minute operating reserve*, if the submitted *operating reserve ramp rate reference level value* is greater than or equal to  $1/30^{\text{th}}$  of the maximum *operating reserve* that the *resource* can provide; or
- if the submitted *operating reserve ramp rate reference level* equal to the *resource's* registered maximum *energy offer ramp rate*;
- to determine *minimum generation block run time* (MGBRT) or *minimum loading point* (MLP) *reference levels* if the submitted *reference level* is equal to the value currently registered for the *resource* and where the summer and winter *reference level* will be the same value;
- to determine an *energy offer reference level* that is equal to or less than \$0.10/MWh;
- to determine an *operating reserve offer reference level* that is equal to or less than \$0.10/MW; and
- to determine an *operating reserve ramp rate reference level* equal to the *resource's* registered maximum *bid* ramp rate.

### 3.3. Procedure Initiation by the Market Participant

(MR Ch. 7, ss. 22.1.1 and 22.5.4)

A *resource's* *reference levels* for *financial dispatch data parameters* may need to be determined for the first time or may need to be updated to reflect significant changes to its *short-run marginal costs*. A *market participant* may update a determined *reference level* for *non-financial dispatch parameters* when the *reference level* no longer reflects their *resource's* operational capability for the current period. If the methodologies do not reasonably address the characteristics of a specific *resource*, a *market participant* may request modifications to the methodologies the *IESO* uses. A *market participant* may update a determined *reference quantity* when the *reference quantity* no longer reflects their *resource's* operational capability for the current period. All changes requested are subject to review and approval by the *IESO*.

The procedures referenced in this section are found in [Market Manual 1, Part 1.5: Market Registration Procedures](#).

#### 3.3.1. Initiation

A *market participant* may initiate the Determine Reference Levels and Reference Quantities procedure in the following situations.

### 3.3.1.1. Registration of a New Resource

An equipment owner initiates the Register Equipment procedure to register a new *resource* to participate in the *energy* and *operating reserve* markets as a *dispatchable resource*, which automatically initiates the Determine Reference Levels and Reference Quantities procedure. The Equipment Registration Specialist (Equipment Owner) must complete the Determine Reference Levels and Reference Quantities procedure before the Register Equipment procedure can be completed.

### 3.3.1.2. Change in Resource Participation

An existing *resource* without determined *reference levels* or *reference quantities* intends to change its participation type to a *dispatchable resource*. When a *market participant* begins the Commission Equipment Process, it automatically starts the Determine Reference Levels and Reference Quantities procedure.

### 3.3.1.3. Changes to Resources' Cost Components or Operating Capabilities

A *market participant* may initiate the Determine Reference Levels and Reference Quantities procedure to request an update to a *reference level* for a *financial dispatch data parameter* when:

- there has been a material change in an existing *resource's* costs, equipment or operations or the *market participant* reasonably expects there to be such a change such that the determined *reference levels* and/or *reference quantities* no longer reflect an appropriate estimate of its operations; or
- one or more components of the *reference level* need to be updated.

Table 3-1 summarizes the request types that a *market participant* may initiate to change a registered *reference level* or *reference quantity*.

**Table 3-1: Market Participant Request Type for Reference Level or Reference Quantity Changes**

Request	Description
Change existing <i>reference level</i> for a <i>financial dispatch data parameter</i> cost-component value.	A cost component value used in a registered <i>reference level</i> of a <i>resource</i> no longer accurately reflects the <i>resource's</i> eligible <i>short-run marginal costs</i> .
Change cost-component approach, including adding new eligible cost components and removal of previously eligible cost components.	The registered <i>reference level</i> of a <i>resource</i> includes cost components that are no longer eligible to contribute to a <i>reference level</i> or does not include cost components that are now eligible to contribute to a <i>reference level</i> .

Request	Description
Change existing <i>reference level</i> for <i>non-financial dispatch data parameter</i> value.	The <i>non-financial dispatch data parameter reference level</i> requires updating to reflect significant operational changes of its <i>resource</i> .
Change <i>reference quantity</i> .	There is a change in the operating characteristics of a <i>resource</i> which results in a need to alter the methodology to determine the available supply of <i>energy</i> or <i>operating reserve</i> . This quantity is then used to calculate the <i>reference quantity</i> for that <i>resource</i> . A <i>market participant</i> changes its operations in a manner that fundamentally impacts how <i>reference quantities</i> are calculated for its <i>resource</i> .

### 3.3.2. Submission

The Market Power Mitigation Contact for a *resource* determined pursuant to [Market Manual 1, Part 1.5](#) must provide its requested values for relevant cost components and *reference levels* for a *resource*. [Section 6](#) and [section 7](#) provide more details on *reference level* components, calculations and required supporting documentation. A *resource* with no previously determined *reference levels* or *reference quantities* cannot participate in the *energy* and *operating reserve* markets as a *dispatchable resource*.

If any part of the methodology used to determine a *reference level* is not applicable to a *resource* and a modification to a formula or cost component is necessary, the details and rationale for the change must be demonstrated to the *IESO*.

A *market participant* may request modifications to a *reference level* for a *financial dispatch data parameter* if any part of the methodology used to determine the *reference level* is not applicable to the *resource*. For example, a *market participant* with a *resource* that switches from one source of a fuel to another may request an update to the *resource's* relevant *reference levels* to reflect a fuel price index that is representative of the *resource's* regularly incurred fuel cost.

Modifications may also be requested for *reference levels* for *non-financial dispatch data parameters* or *reference quantities*. For example, changes to environmental laws and regulations that restrict *energy* production by a *resource* could prompt a *market participant* to request a modification to a *reference quantity* formula.

A *market participant* may provide a future effective date while submitting a request to determine or update *reference levels* and *reference quantities* pursuant to **MR Ch. 7, s. 22.5.4.1** or **s. 22.7.3.1** and must do so when submitting the request pursuant to **MR Ch. 7, s. 22.5.4.2** or **s. 22.7.3.2**. This proposed effective date may reflect the

expected date of when an operational characteristic is likely to change or when a cost component takes effect.

### 3.3.3. Preliminary View of the Reference Level Submission

(MR Ch. 7, s. 22.8.1)

Once a request is received, the *IESO* will inform a *market participant* if additional information is required to complete the review.

Upon completion of the review, the *IESO* will notify the *market participant* of the *IESO's preliminary view*. The *IESO* will identify any components of a *reference level* or *reference quantity* that are different from the *market participant's* requested *reference levels* or *reference quantity* and provide the *IESO's* rationale for any differences.

### 3.3.4. Registration

The *reference levels* and *reference quantities* contained in the *preliminary view* will be registered 11 business days after the date of the *preliminary view*, unless the *market participant* initiates the Independent Review Process pursuant to **MR Ch. 7, s. 22.8.2**. The *IESO* will notify the *market participant* through the Registration Approval Notice of the date when the changes to a *reference level* or *reference quantity* will take effect.

## 3.4. Procedure Initiation by the IESO

(MR Ch. 7, ss. 22.5.1.1, 22.5.1.2, 22.5.1.3, 22.5.1.7, and 22.5.2)

### 3.4.1. Initiation

The *IESO* may initiate the Determine Reference Levels and Reference Quantities procedure in the situations set out below.

#### 3.4.1.1. Changes to Registered Parameters

The *market participant* updates a *resource's* registered parameter and the *IESO* determines that the updated parameter value is inconsistent with the related *reference level(s)* or *reference quantities*.

#### 3.4.1.2. Outdated Information

A *reference level* was determined or updated more than two years earlier and the *IESO* determines that the *resource's* market behaviour indicates that its *short-run marginal costs* are lower than determined *reference levels* for a *financial dispatch data parameter*.

### 3.4.1.3. Inaccurate Information

The *IESO* determines that the supporting documentation used to support a particular *reference level* or *reference quantity* was not accurate when that *reference level* or *reference quantity* was initially determined.

### 3.4.1.4. Changes to Market Rules and Market Manuals

The *IESO* updates the *market rules* or *market manual* and concludes that a change to a registered *reference level* or *reference quantity* is necessary to ensure that the registered *reference level* or *reference quantity* is consistent with the updated *market rules* and *market manuals*.

## 3.4.2. Outcomes

(MR Ch. 7, ss. 22.1.3, and 22.8.1)

After initiating the Determine Reference Levels and Reference Quantities procedure, the *IESO* will take one of the following actions:

- issue a request for information to the *market participant* detailing the rationale of the request, the required information and any associated timelines; or
- provide a *preliminary view* along with the supporting rationale.

## 3.5. Independent Review

(MR Ch. 7, section 22.8)

The *IESO* will use commercially reasonable efforts to meet the timelines set out in this [section 3.5](#).

### 3.5.1. Review Topics

(MR Ch. 7, section 22.8.2)

A *market participant* may request an independent review of a *reference level* or *reference quantity* in a *preliminary view* on the following topics:

- **Reference Level for a Financial Dispatch Data Parameter:** The reviewer will determine the *reference level* for a particular *financial dispatch data parameter* or value of a cost component of a *reference level* for that *financial dispatch data parameter* based on the supporting documentation provided and the requirements set out in the applicable *market rules* and *market manuals*.
- **Reference Level for a Non-Financial Dispatch Data Parameter:** The reviewer will determine the *reference level* for a particular *non-financial dispatch data parameter* based on the supporting documentation provided and the requirements set out in the applicable *market rules* and *market manuals*.

- **Reference Quantity Modifier:** The reviewer determines whether a requested *reference quantity* modifier reasonably accounts for the relevant technical operating characteristics of a *resource*, given the provided supporting documentation and the applicable *market rules* and *market manuals*.

### 3.5.2. Review Initiation

(MR: Ch. 7, s. 22.8.2)

A *market participant* may initiate an independent review through Online IESO after receiving the *preliminary view*. The *market participant* will indicate the documents that it views as relevant to the review in Online IESO. The *market participant* must separately complete and submit to the *IESO* FORM [\*].

The *IESO* will review the submitted FORM [\*] to ensure that there are no errors in the form content and will notify the *market participant* if any errors are identified. The completed FORM [\*] will be provided to the independent reviewer as the statement required by **MR Ch. 7, s. 22.8.5.1**. The *IESO* may supplement the list of documents indicated by the *market participant* with any other relevant documents that the *IESO* relied on when forming its *preliminary view* on the *reference level* or *reference quantity* being reviewed. The *market participant* shall choose the documents that will be provided as part of the process to procure a reviewer from the list of documents that the *market participant* indicated as relevant to the review in Online IESO.

### 3.5.3. Reviewer Procurement

(MR: Ch. 7, s. 22.8.3)

The *IESO* will solicit proposals from reviewers within five *business days* of confirming to the market participant that FORM [\*] is complete. The selected independent reviewer will provide an estimate of the cost of the review within 10 *business days* following their selection, at which point the *IESO* shall provide the *market participant* with an estimate of the cost of the review and the *market participant* must notify the *IESO* within 5 *business days* that it wishes to continue with the review or whether it wishes to withdraw a portion of its review request.

The *IESO* shall provide the reviewer with the materials specified in **MR Ch. 7, s. 22.8.5**, no later than five *business days* following the day on which the *market participant* notifies the *IESO* that it wishes to proceed with the review. The *IESO* shall provide the following materials to the *market participant*:

- the materials that were provided to potential reviewers during the process to procure a reviewer; and
- the materials that were provided to the selected reviewer.

The *IESO* will include the *market participant* in all communications with the selected independent reviewer regarding the review following reviewer procurement.



### 3.5.3.1. Reviewer Independence

A reviewer will be ineligible to submit a proposal for a particular review if:

- ~~Outside~~outside of being a reviewer for a review conducted pursuant to **MR Ch. 7, s. 22.8**, they are currently assisting or in the last three years have assisted: (i) the *IESO* in determining *reference levels* and/or *reference quantities* for the *market participant* or (ii) the *market participant* in its *reference level* and/or *reference quantity* submissions; or
- ~~They~~they have been an employee or a director in the last three years of: (i) the *IESO*; (ii) the *market participant*; or (iii) an *affiliate* or partner of the *market participant*.

### 3.5.4. Rejecting Findings

(MR: Ch. 7, s. 22.8.8)

The *IESO* shall notify the relevant *market participant* within five *business days* of receiving a report if it rejects a finding in the report. The notification shall specify the reason for rejecting the finding.

### 3.5.5. Registering Reference Levels and Reference Quantities Following a Review

(MR: Ch. 7, s. 22.8.7)

The *IESO* will register each *reference level* or *reference quantity* that is consistent with the findings of the independent reviewer's report and the *market rules* within 10 *business days* of receiving the report, unless the *IESO* rejects a finding in the report pursuant to **MR Ch. 7, s. 22.8.8**.

**== End of Section ==**



## 4. Reference Level and Reference Quantity Reports

(MR Ch. 7, ss. 22.1.4 and 22.6.4)

### 4.1. Reference Level Value Reporting

(MR Ch. 7, section 22.1.4)

A *resource's reference levels* are available through Online IESO. A *resource's* current and past *reference level values* are accessible through the confidential Participant Reports section of the [IESO Reports](#) website.

The *IESO* makes *reference level values* for a *resource* applicable to a *dispatch day* available on a confidential basis to a *market participant* through the Reference Level Values for Financial Dispatch Data Parameters Day-Ahead Market Report and the Reference Level Values for Financial Dispatch Data Parameters Real-Time Market Report. The *IESO* uses the *reference level values* in these reports in the ex-ante market power mitigation processes in **MR Ch. 7, s. 22.14, Appendix 7.1A** and **Appendix 7.2A**.

#### 4.1.1. Day-Ahead Market Reporting

The Reference level Values for Financial Dispatch Data Parameters Day-Ahead Market Report contains *reference level values* for *financial dispatch data parameters* for a *resource* for the *day-ahead market*.

For *resources* that have multiple sets of *reference level values* pursuant to **MR Ch. 7, s. 22.4.3**, the report will contain *reference level values* for both cost profiles and will indicate which cost profile will be used by the *IESO*.

For *resources* that have multiple sets of *reference level values* pursuant to **MR Ch. 7, s. 22.4.1** and **s. 22.4.2**, the report will contain both sets of *reference level values*, where applicable.

The *IESO publishes* the Reference Level Values for Financial Dispatch Data Parameters Day-Ahead Market Report daily by 6:00 EPT for the next *dispatch day*. For example, the Reference Level Values for Financial Dispatch Data Parameters Day-Ahead Market Report for the June 20 *dispatch day* will be made available by 6:00 EPT on June 19.

If a *market participant* submits a request for a temporary fuel cost component revision pursuant to **MR Ch. 7, s. 22.5.5** or a request that the *IESO* temporarily use alternate cost profile *reference levels* for a *resource* pursuant to **MR Ch. 7, s. 22.5.6** before

9:30 EPT on the day prior to a *dispatch day*, the *IESO* will update the Reference Level Values for Financial Dispatch Data Parameters Day-Ahead Market Report for that *dispatch day*.

#### 4.1.2. Real-Time Market Reporting

The Reference Level Values for Financial Dispatch Data Parameters Real-Time Market Report contains *reference level values* for *financial dispatch data parameters* for a *resource* for the *real-time market*.

For *resources* that have multiple sets of *reference level values* pursuant to **MR Ch. 7, s. 22.4.3**, the report will contain *reference level values* for both cost profiles and will indicate which cost profile will be used by the *IESO*.

For *resources* that have multiple sets of *reference level values* pursuant to **MR Ch. 7, s. 22.4.1** and **s. 22.4.2**, the report will contain both sets of *reference level values*, where applicable.

The *IESO* publishes the Reference Level Values for Financial Dispatch Data Parameters Real-Time Market Report daily at 14:00 EPT for the next *dispatch day*.

If a *market participant* submits a request for a temporary fuel cost component revision pursuant to **MR Ch. 7, s. 22.5.5** or a request that the *IESO* temporarily use an alternate cost profile for a *resource's reference levels* pursuant to **MR Ch. 7, s. 22.5.6** for one or more *dispatch hours*, the *IESO* will update the Reference Level Values for Financial Dispatch Data Parameters Day-Ahead Market Report accordingly.

## 4.2. Reference Quantity Value Reporting

(MR Ch. 7, section 22.6.4)

Registered modifiers to *reference quantities* are available through Online IESO. Current and past *reference quantity values* are accessible through the confidential Participant Reports section in the [IESO Reports](#) website.

The *IESO* makes *reference quantity values* for a *resource* applicable to a *dispatch day* available on a confidential basis to a *market participant* through the Reference Quantity Values Day-Ahead Market Report and the Reference Quantity Values Real-Time Market Report. The *IESO* uses these *reference quantity values* in the ex-post market power mitigation processes for *physical withholding* described in **MR Ch. 7, s. 22**.

The Reference Quantity Values Day-Ahead Market Report contains *reference quantity values* for a *resource* for the *day-ahead market*. The *IESO* publishes the Reference Quantity Values Day-Ahead Market Report on a daily basis by 6:00 EPT for the next *dispatch day*. For example, the Reference Quantity Value Day-Ahead Market Report for the June 20 *dispatch day* will be made available by 6:00 EPT on June 19.

The Reference Quantity Values Real-Time Market Report contains *reference quantity values* for a *resource* for the *real-time market*. The *IESO* publishes the Reference Quantity Values Real-Time Market Report for a *dispatch day* by 6:00 EPT on the day after the *dispatch day*. For example, the Reference Quantity Values Real-Time Market Report for the June 20 *dispatch day* will be made available by 6:00 EPT on June 21.


**— End of Section —**

## 5. Temporary Reference Level Change Requests


### 5.1. Request Timing

(MR Ch. 7, ss. 22.5.5—22.5.7)

A *market participant* may request that the *IESO* update a *resource's reference level* fuel cost components or use an alternate cost profile for a *resource* pursuant to **MR Ch. 7, s. 22.5.6** as illustrated in Figure 5-1 and Figure 5-2 below:

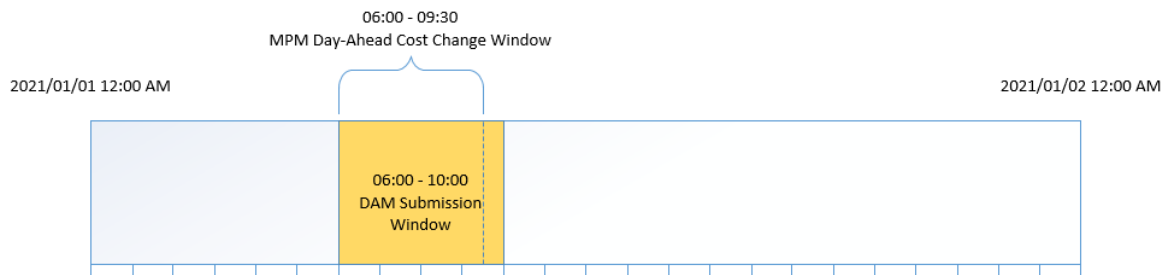

**Figure 5-1: DAM Reference Level Change Request Window**

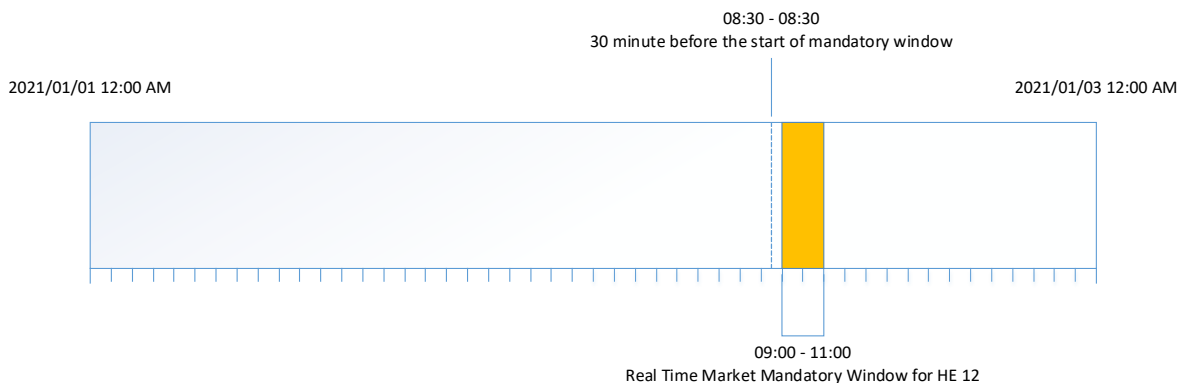

**Figure 5-2: Real-Time Market Reference Level Change Request Window for HE12**

### 5.2. Supporting Documentation

(MR Ch. 7, ss. 22.1.3 and 22.5.11)

All *reference level* change requests must include documentation to support the request.

### 5.2.1. Fuel-Cost Change

(MR Ch. 7, section 22.5.5)

The *IESO* will accept the following types of documentation to support a request to use a higher fuel cost component in a *resource's reference levels*:

- fuel invoices;
- fuel quotes;
- an *offer* submitted by the *market participant* to buy fuel on a trading platform;
- contract terms for fuel procurement;
- documentation related to any process changes used to address varying conditions, such as extreme temperatures and pipeline restrictions;
- written confirmations of the arrangement of fuel purchases at the time the fuel was purchased;
- for a *resource* using fuel from its own storage, any of the acceptable documentation from this list and a calculation of its weighted average cost of fuel (WACOF);<sup>1</sup> and
- any other documentation that demonstrates to the *IESO's* satisfaction that a *resource's* fuel costs have temporarily increased.

### 5.2.2. Resources with Alternate Cost Profiles

(MR Ch. 7, section 22.5.6)

The *IESO* will accept the documentation the *IESO* and the *market participant* agreed upon at the time the *resource's reference levels* were determined pursuant to **MR Ch. 7, s. 22.4.3.**

## 5.3. Use of Higher Fuel Cost Component or an Alternate Cost Profile

The *IESO* will use the requested higher fuel cost component or cost profile *reference level* during the applicable *dispatch hours* and will notify the *market participant* of the same, unless the *IESO* finds that submitted supporting documentation does not

---

<sup>1</sup> The formula to calculate WACOF is:

$$\frac{[(\text{Fuel volume purchased on the day in which it is used} \times \text{the price of fuel on the day}) + (\text{previous volume in storage} \times \text{previous WACOF})]}{(\text{volume injected on the day} + \text{previous volume in storage})} \\ = \frac{(\text{Fuel volume purchased on the day in which it is injected} \times \text{the price of fuel on the day}) + (\text{previous volume in storage} \times \text{previous WACOF})}{(\text{volume injected on the day} + \text{previous volume in storage})}$$

support the request or otherwise rejects the request pursuant to **MR Ch. 7, s. 22.5.10**.

## 5.4. Documentation Following Use of Alternate Cost Profile Reference Levels

(MR Ch. 7, section 22.5.11)

A *market participant* may be required to submit documentation demonstrating that the alternate cost profile *reference levels* represented a *resource's short-run marginal costs* during the *dispatch hours* requested.

This documentation must be submitted within two *business days* after the *dispatch day* in which the alternate cost profile set of *reference levels* was used. If the *market participant* fails to provide this documentation or fails to provide it within the specified time, or the *IESO* finds that the documentation submitted does not support the request, then the *IESO* may take the actions specified in **MR Ch. 7, ss. 22.5.10 and 22.5.11**, as the case may be.

## 5.5. IESO Review of Documentation and Response to Market Participants

Within five *business days* following the *dispatch hours* that were the subject of the request, the *IESO* may review the submitted supporting documentation and will notify the *market participant* if the request was validated or not.

If the *market participant* fails to provide supporting documentation, or if the *IESO* finds that the supporting documentation provided does not support the request, then the *IESO* may take the actions specified in **MR Ch. 7, ss. 22.5.10.1, 22.5.10.2, 22.5.10.3 and 22.5.10.4**.

**— End of Section —**

## 6. Cost Components of Financial Dispatch Data Parameters

(MR Ch. 7, sections 22.1.1, 22.2.1, and 22.2.2)

This section describes the cost components that are eligible to be included in a *resource's reference level* cost calculation formulas. A *resource's short-run marginal costs* are eligible cost components for *financial dispatch data parameter* calculations. All the cost components described in this section are not applicable for all technology types. [Section 7](#) provides technology-specific guidelines regarding applicable cost components, formulas and supporting documentation required for different *resource* technology types.

### 6.1. Costs Related to Fuel

Fuel-related costs are the cost of materials used in the operation of a *resource* for the purpose of electricity production.

Fuel commodity costs are adjusted, as applicable, with efficiency or performance metrics to determine fuel-related costs.

#### 6.1.1. Performance Factors

Performance factors account for uncertainties across *resources* and changes to *resource* efficiency without having to adjust the heat rate for the *resource*. Changes to *resource* efficiency are measured by the fuel consumption per MWh of production or per start. Performance factors for a *resource* can be impacted by seasonal factors such as ambient conditions and can result in *reference levels* for *financial dispatch data parameters* that differ according to the season. For example, a *resource* could have a higher *energy offer reference level* in the season in which the *resource* is less efficient.

### 6.2. Costs Related to Emissions

Emissions costs are the charges a *resource* incurs associated with regulated emissions that result from *energy* production. The *IESO* will limit the emissions component of the *reference level* calculations to be no less than \$0.

### 6.3. Costs Related to Operating and Maintenance

Operating costs are the costs incurred while operating a *resource*. Maintenance costs are the costs incurred in the upkeep associated with maintaining the *resource's*

systems and equipment in the condition required to perform their intended function. These costs are collectively referred to as operating and maintenance (O&M) costs.

O&M costs incurred are approved by the *IESO* based on information submitted by a *market participant* and are allocated, as applicable, to a *resource's*:

- *energy offer reference level* (\$/MWh);
- *start-up offer reference level* (\$/start); and
- *speed no-load offer reference level* (\$/hour).

For *energy offers*, the incremental O&M costs needed to produce *energy* are distributed across the total MWh generated for that period to arrive at a \$/MWh figure. For *start-up offers*, the eligible incremental O&M costs are those incurred as a result of starting up the *resource*. For *speed no-load offers*, the incremental O&M costs represent the upkeep and expenses incurred for each hour of operation by the *resource*, regardless of how much *energy* is supplied in a given hour.

Only the portion of O&M costs incurred for the purpose of providing incremental supply of *energy* or *operating reserve* is eligible to be included in *reference levels*. O&M costs that do not vary as a result of incremental supply of *energy* or *operating reserve*, referred to as fixed O&M costs, are not eligible costs and cannot be considered when determining a *reference level*.

The following fixed O&M costs are examples of ineligible costs:

- preventive or routine maintenance that is not directly attributable to incremental supply from the *resource*;
- building maintenance;
- road construction or maintenance;
- landscaping; and
- perimeter security.

The portion of labour costs that is incremental and attributable to eligible maintenance activities may be included in a *resource's reference levels*. Eligible labour costs are limited to staff overtime or contractor labour required for eligible maintenance activities. Staffing costs that do not vary with supply of *energy* or *operating reserve* cannot be included into a *resource's reference levels*.

For a *resource* that is not continuously staffed and for which a *market participant* can demonstrate that an incremental labour cost is incurred to start or operate the *resource*, the additional costs may be included in the *resource's reference levels*. Incremental costs must be based on actual historical costs or contracts in place for the labour to start or operate the *resource*.

Maintenance costs associated with the incremental supply of *energy* or *operating reserve* are divided into three categories: major maintenance costs, scheduled



maintenance costs and unscheduled maintenance costs. The allocation of eligible O&M costs between incremental *energy offer*, *speed no-load offer*, and *start-up offer reference levels* may vary by *resource* type based on the OEM recommendations for maintenance activities, and by the type of maintenance (major, scheduled or unscheduled maintenance).

### 6.3.1. Major Maintenance Costs

Major maintenance costs are costs related to major component replacements, maintenance activities or inspection of the *resource* that occur during the *resource's* design life. These costs are necessary to maintain the *resource's* operational ability for electricity production for its design life and are required as a direct result of incremental electricity production.

The design life of the *resource* is the number of years that the *resource* was expected to operate for at the time that it came into service. As part of determining *reference levels*, the *IESO* determines the design life in discussion with the *market participant*. The initial determination of design life considers any modifications or past improvements undertaken by the *market participant* that may have extended the *resource's* original design life from when it first entered into commercial operation.

Design life is typically established in the design basis for a *facility*. The design life is used to make key decisions for allowances and material selection in a *generation facility* (e.g. tube thickness allowances in boilers when the boiler is designed and manufactured).

A *market participant* must submit supporting documentation that identifies the remaining expected design life of a *resource*. Documentation may be in the form of design documentation for a *resource* or studies and assessments of *generation facility* life.

Any costs associated with performance improvements of a *resource* or any life extension activities beyond the design life established during the initial process to determine *reference levels* are not eligible costs.

Performance improvements are expenditures to improve any of the following characteristics of the *resource* beyond their values determined during the initial process to determine *reference levels*:

- efficiency in the amount of fuel used to produce a fixed MWh quantity of *energy*;
- maximum production capability; or
- availability to supply *energy* or *operating reserve*, including modifications to enable alternate operating modes at the *resource*.

If performance improvement projects are undertaken in lieu of major maintenance, the estimated cost for the major maintenance is eligible for inclusion in the *resource's reference levels*. However, the incremental cost to undertake the performance improving project is ineligible.

Major maintenance conducted on *resources* can vary significantly between different technology types. [Section 7](#) describes the eligible major maintenance components and required supporting documentation by technology type.

### 6.3.2. Scheduled Maintenance Costs

Scheduled maintenance costs are costs associated with routine maintenance tasks performed on electrical and mechanical equipment. A *market participant* may update these costs on an as-needed basis.

Scheduled maintenance costs will only be approved for activities that result from an incremental supply of *energy* or *operating reserve*. Examples of eligible costs include the cost of consumable materials and overtime labour specifically required to perform these maintenance activities above base labour required for fixed O&M.

### 6.3.3. Unscheduled Maintenance Costs

Unscheduled maintenance costs are costs associated with all non-scheduled maintenance activity needed for equipment required for incremental electricity production. Such equipment includes mechanical, electrical and/or instrumentation and controls systems required to return the *resource* to full operation in the event of an equipment failure. Examples of eligible costs include overtime labour or third-party labour contracted to repair the components and materials cost associated with any such repairs.

Eligible costs are limited to unscheduled maintenance for turbine, *generation unit*, transformer, or balance of plant components that result from incremental supply of *energy* or *operating reserve*. Expenses related to any system or equipment needed to remain in-service when a *resource* is not in operation are not eligible costs.

### 6.3.4. Incremental Third-Party Payments

Eligible incremental third-party payments for *resources* are payments that are paid on the basis of incremental generation and which are due to third parties, such as royalties, payments to Indigenous communities, and land lease agreements.

A *market participant* must delineate whether the costs are incurred based on measurements at the *resource revenue meter* or via SCADA measurements and ensure that the *resource* operational meter is used as the reference for determining the *reference level cost*.

## 6.4. Opportunity Costs

*Resources* with intertemporal production limitations, such as hydroelectric and *energy/electricity storage resources*, may face an opportunity cost when they submit *offers* for *energy* because they may forego future *energy* or *operating reserve* revenues due to operational limitations. For example, when a hydroelectric *resource* with limited water in storage uses that water to produce *energy* in the current *dispatch day*, it may incur an opportunity cost because it foregoes the chance to use that water to produce *energy* at a higher price in a future *dispatch day*.

Opportunity costs that are related to foregone *energy* or *operating reserve* revenues may be included in the *energy offer reference level* or *operating reserve offer reference level* for *resources* with intertemporal production limitations. Opportunity costs for these *resources* represent the expected future *energy* or *operating reserve* revenues that a *market participant* may forego as a result of submitting *energy* or *operating reserve offers* in the current *dispatch day*.

Only opportunity costs affecting a *resource's energy* or *operating reserve market* revenues may be included in the *resource's reference levels*.

### 6.4.1. Requesting Additional Opportunity Costs

If a *resource's* operational characteristics are such that an additional opportunity cost related to material amounts of foregone *energy* or *operating reserve* revenues is incurred that is not already reasonably addressed by market design, a *market participant* may request an additional opportunity cost in the *reference level* submission for that *resource*.

In order to request an additional opportunity cost, the *market participant* must submit the proposed methodology for calculating the opportunity cost and documentation supporting the proposed opportunity cost. The supporting documentation must explain:

- the operational characteristic of the *resource* that is not reasonably addressed by the already-submitted opportunity costs and how this creates an opportunity cost related to foregone *energy* or *operating reserve* revenues;
- the mathematical formulation of the additional opportunity cost; and
- how the *IESO* calculates the additional opportunity cost, including identifying the specific data that would be required to support this calculation.

The *IESO* may deny the request for an additional opportunity cost if, in the *IESO's* opinion, the request does not meet the above requirements.

In addition, the *IESO* shall not register an additional opportunity cost as part of a *resource's reference levels* if, in the *IESO's* opinion, any of the following conditions is true:

- the operational characteristic identified is reasonably addressed by the opportunity costs described in [section 6.4.3](#), [section 6.4.4](#) or [section 6.4.5](#);
- submitting *energy* or *operating reserve offers* does not, in practice, create an additional opportunity cost relating to foregone *energy* or *operating reserve* revenues for the *resource*;
- the quantum of the additional opportunity cost, as per the formulation submitted by the *market participant*, is not material;
- it is not reasonable to expect that the foregone *energy* or *operating reserve* revenue would have otherwise been received assuming the *resource* was subject to *unrestricted competition*;
- the opportunity cost is otherwise addressed through market design or system design;
- the proposed formulation does not result in a reasonable estimate of the additional opportunity cost;
- the additional opportunity cost requested addresses foregone revenues that are not *energy* or *operating reserve* revenues; or
- implementing the additional opportunity cost would require the *IESO* to incur IT solution development costs.

### 6.4.2. Opportunity Cost Formula

The opportunity cost component of the *energy offer reference level* is the sum of all subcomponent opportunity costs.

The opportunity cost component of the *energy offer reference level* for a hydroelectric *resource* contains three subcomponents: an intraday opportunity cost, a storage horizon opportunity cost, and a *forebay* refill opportunity cost.

The opportunity cost component of the *energy offer reference level* for a hydroelectric *resource* is:

$$\begin{aligned}
 \text{Opportunity Cost} & \left( \frac{\$}{\text{MWh}} \right) \\
 & = \text{Intraday Opportunity Cost} \left( \frac{\$}{\text{MWh}} \right) \\
 & + \text{Storage Horizon Opportunity Cost} \left( \frac{\$}{\text{MWh}} \right) \\
 & + \text{Forebay Refill Opportunity Cost} \left( \frac{\$}{\text{MWh}} \right)
 \end{aligned}$$

### 6.4.3. The Intraday Opportunity Cost

The intraday opportunity cost accounts for the opportunity cost of shifting production for a *dispatch hour* after *day-ahead market* schedules and prices are determined for *resources* that have limited ability to supply *energy* in a *dispatch day*.

#### 6.4.3.1. Eligibility

The intraday opportunity cost is eligible for use for *resources* that are *energy*-limited below their maximum available capacity for a *dispatch day*. *Resources* that submit a *maximum daily energy limit* that is less than the maximum capacity of the *resource* across the *dispatch day* meet this criterion.

The intraday opportunity cost is calculated by the *IESO* by default for *generation resources* at energy storage *resources*. The intraday opportunity cost is also calculated by the *IESO* for hydroelectric *resources* that submit a *maximum daily energy limit* that is less than the available capacity for that *dispatch day*. Available capacity is determined based on the sum of the maximum active power capability of all *generation units* associated with the *resource* less planned *outages*.

Other *resources* that can submit a *maximum daily energy limit* for a *dispatch day* may request use of the intraday opportunity cost adder when registering *reference levels*. The *IESO* will include the intraday opportunity cost in the calculation of *reference level values* for any such *resources* when their *maximum daily energy limit* is less than the *resource's* available capacity.

*Variable generation resources* are not eligible to request use of the intraday opportunity cost.

#### 6.4.3.2. Application

The intraday opportunity cost is calculated by the *IESO* for all eligible *resources* after *day-ahead market* schedules and prices are set and is added to the *reference level values* for a *resource* that will be used in the *real-time market*.

#### 6.4.3.3. Methodology

The intraday opportunity cost is the maximum of \$0/MWh and the maximum *day-ahead market LMP* for the *dispatch day* for the *resource*.

### 6.4.4. The Storage Horizon Opportunity Cost

The storage horizon opportunity cost accounts for the opportunity cost for hydroelectric *resources* of foregoing *energy* revenues from future *dispatch days* when producing a MWh of *energy* in the current *dispatch day*.

#### 6.4.4.1. Eligibility

The storage horizon opportunity cost is eligible for use for *dispatchable* hydroelectric *resources* with a storage horizon (measured in days) greater than 1. The storage horizon of a *resource* is calculated when *reference levels* are determined for that *resource*.

A *market participant* that wishes to use the storage horizon opportunity cost for a *resource* must indicate that they intend to do so when *reference levels* are determined for that *resource*. They must also submit the storage horizon calculation to the *IESO* as part of the *reference level* submission.

#### 6.4.4.2. Information Required

In order for the *IESO* to apply the storage horizon opportunity cost for a *resource*, the following information must be submitted in the relevant *reference level* submissions:

- the storage horizon, in days, calculated in accordance with the equation below;
- the *market participant* election of the approach to determine base *LMPs*;

The following data, gathered by the *IESO* on a rolling basis, is also used to calculate the storage horizon opportunity cost:

- historical hourly average *LMPs* of the *resource*;
- ICE NYISO Zone A, Day-Ahead monthly price forecasts for the storage horizon; and
- NYISO Zone A, hourly *day-ahead market settled* prices.

#### Market Participant Election of Approach to Determine Base LMPs

Base *LMPs* are used as the starting point to forecast *LMPs* for the *resource* when evaluating foregone *energy* revenues related to the storage horizon opportunity cost. There are two options for calculating the base *LMPs* used in the calculation of storage horizon opportunity cost. These options are described below. Under both options, the *IESO* smooths extreme values of *LMPs* when determining the storage horizon *LMP*, but the smoothing technique differs by option. High-level descriptions of the smoothing technique used under these approaches are also found below.

A *market participant* is permitted to update the election for a *resource's* base *LMPs* no more than once every 365 days. The request to update the election must be done via the registration process to determine *reference levels*.

#### Option 1

Under this option, the base *LMPs* for the *resource* are based on the historical hourly *LMPs* at the *resource* from years preceding the current year. For example, to determine the base *LMPs* for May 2022 under option 1, the *IESO* would use *LMPs* from May 2021 as the historical *LMP* input.

## Option 2

Under this option, the base *LMPs* for the *resource* are based on the historical hourly *LMPs* at the *resource* from the 28 days prior to the calculation date. For example, to determine the base *LMPs* for May 1, 2022 under option 2, the *IESO* would use *LMPs* from the 28 days prior to the calculation date as the historical *LMP* input.

### Determining the Storage Horizon

A *market participant* requesting the storage horizon opportunity cost for a hydroelectric *resource* must submit the storage horizon requested for the *resource*. The *market participant* must also submit supporting documentation that demonstrates that the calculation of the storage horizon was carried out in accordance with the methodology described below.

*Resources* that share a *forebay* must determine the maximum possible water in storage per *resource* based on the pro rata share of installed capacity of *resources* that share the *forebay*, as described below.

$$\text{Storage Horizon} = \frac{\left( \frac{\text{Maximum Possible Water in Storage (m}^3\text{)}}{\text{Power Flow (}\frac{\text{m}^3}{\text{s}}\text{)}} \right)}{\left( \text{Minimum Monthly Plant Capacity Factor} \times 86400 \left( \frac{\text{s}}{\text{d}} \right) \right)}$$

Where:

- Maximum Possible Water in Storage (m<sup>3</sup>): The volume between the maximum allowed (e.g. lake compliance maximum) and the minimum allowed (e.g. lake compliance minimum) for the *forebay* associated with the *resource*. *Resources* that share a *forebay* allocate the maximum possible water in storage to all *resources* that share the *forebay* pro rata based on installed capacity of the relevant *resources*;
- Power flow (m<sup>3</sup>/s): Maximum turbine flow (m<sup>3</sup>/s), aggregated for the *generation units* in the *resource*; and
- Minimum Monthly Plant Capacity Factor: The minimum of the average monthly capacity factor of the *resource*, calculated in the following manner:

1. Calculate the monthly capacity factor for the *resource* for each month in the **five**-year historical study period. The historical study period is the 5 years preceding the current year.

The monthly capacity factor is:



$$\text{Capacity Factor}_{m,y} = \frac{\text{Total Energy Produced (MWh)}}{\text{Maximum Generation Rating (MW)} \times \text{Number of hours in a month}}$$

This creates a data set of 60 monthly capacity factors.

2. For each calendar month in the historical study period, average the five monthly capacity factors.

For example:

January 2020 Capacity Factor =  
(Jan 2019 CapFactor + Jan 2018 CapFactor + Jan 2017 CapFactor + Jan 2016  
CapFactor + Jan 2015 CapFactor)/5

This creates a data set of 12 monthly average capacity factors.

3. Take the minimum of the 12 monthly average capacity factors from the second step. This is the minimum monthly capacity factor used in the storage horizon calculation above.
4. The calculated storage horizon for the *resource* is capped to to a maximum of 365 days.

### **Determining the Storage Horizon for Hydroelectric Resources on a Cascade Group**

*Resources* that are part of a *cascade group* calculate the storage horizon for the storage horizon opportunity cost as follows:

1. Calculate the storage horizon for each *resource* in the *cascade group* according to the methodology above.
2. For each *forebay* in the *cascade group* that is downstream of the top *forebay*, determine the storage horizon at the *resource* at that *forebay* with the maximum storage horizon.
3. Sum the maximum storage horizons for all *resources* identified in step 2.
4. Add the sum from step 3 to the storage horizon calculation for each *resource* that shares the top *forebay* in the *cascade group*.
5. The calculated storage horizon for each *resource* in the *cascade group* is capped to a maximum of 365 days.

For example, assume a *cascade group* where *resources* A and B share a *forebay* at the top of the *cascade group*, *resources* C and D share a *forebay* in the middle of the



*cascade group* and *resources* E and F share a *forebay* at the bottom of the *cascade group*.

The *market participant* for this *cascade group* would first calculate the values in the third column as per the methodology above.

**Table 6-1: Example of Determining the Storage Horizon**

Forebay	Resource	Storage Horizon
1	A	10
1	B	11
2	C	2
2	D	1
3	E	4
3	F	3

To determine the *cascade group* storage horizon for *resource A*, a *market participant* determines the storage horizon values in the third column.

The storage horizon for A:

$$= 10 + \text{MAX}(2,1) + \text{MAX}(4,3)$$

$$= 10 + 2 + 4$$

$$= 16$$

Similarly, the storage horizon for B:

$$= 11 + \text{MAX}(2,1) + \text{MAX}(4,3)$$

$$= 11 + 2 + 4$$

$$= 17$$

The *IESO* would use the 16-day storage horizon to determine the storage horizon opportunity cost for *resource A* and would use the 17-day storage horizon to determine the storage horizon opportunity cost for *resource B*.

### 6.4.4.3. Methodology

The *IESO* calculates the storage horizon opportunity cost in the following manner:

1. First a set of historical LMPs at the *resource* is determined. This profile is referred to as the base *LMPs* for the *resource* and shows what *LMPs* occurred in the past at the *resource*.
2. The base *LMPs* are then adjusted to create the set of forecasted *LMPs* for the *resource*. The *IESO* determines the adjustment based on the relationship between *settled* prices and future prices for NYISO Zone A. If the NYISO Zone A future price trend from the relevant historical period is a 50% increase, then the base *LMP* for that future date is the base *LMP* times 1.5.
3. The *IESO* then adjusts the forecasted *LMPs* to account for efficiency impacts of trading future production at efficiency for production in the current *dispatch day* at a less efficient MW rating. The outcome of this adjustment is efficiency-adjusted forecast *LMPs*.
4. The storage horizon opportunity cost is selected from the efficiency-adjusted forecast *LMP* across the storage horizon for the *resource* as described under Option 1 and Option 2, below.

#### Storage Horizon Opportunity Cost Methodology under Option 1

##### Determining the Base LMPs

The *IESO* calculates the base *LMPs* for the *resource* in the manner described below, according to the election for the *resource* from [section 6.4.4.2](#).

Using the calculated storage horizon of the *resource*, the *IESO* determines the dates of the *resource's* storage horizon that immediately follow the current *dispatch day* (the forecast period) and the corresponding dates of the storage horizon from the previous year that will provide the reference data. To ensure that the reference data provides a suitable sample of on and off peak prices, the reference dates are shifted for day-of-the-week alignment to the forecast period.

The current day and month on which opportunity costs are being determined are denoted  $d_0$  and  $m_0$ . The storage horizon is  $d^{SH}$  days long and the days in the storage horizon are contained in months  $\{m_0, m_0 + 1, \dots, m^{SH}\}$  in the year  $y$ . The first of day of the reference dates is the day and month of the previous year that are closest to, without going before, day  $d_0$  in month  $m_0$  and share the same day of the week as  $(d_0, m_0)$ . A set of reference year dates will be determined for each month of the storage horizon, where the number of days applied from the reference year will be the same as the number of days in that month of the forecast year. This will result in some calendar days shifted between months from the reference year for the calculation.

For example, when determining the base *LMPs* for the *dispatch day* May 26, 2021 with a storage horizon that is seven days long, one day is shifted from June into the May reference data to define the forecast and reference dates:

**Table 6-2: Example of Defining Forecast and Reference Storage Horizon Dates**

Day of the Week	Forecast Storage Horizon Date (d, y)	Storage Horizon Month (m)	Reference Storage Horizon Date (d, y-1)
Thursday	May 27, 2021	$m_0$	May 28, 2020
Friday	May 28, 2021	$m_0$	May 29, 2020
Saturday	May 29, 2021	$m_0$	May 30, 2020
Sunday	May 30, 2021	$m_0$	May 31, 2020
Monday	May 31, 2021	$m_0$	June 1, 2020
Tuesday	June 1, 2021	$m_0 + 1$	June 2, 2020
Wednesday	June 2, 2021	$m_0 + 1$	June 3, 2020

For leap years, more than one day may need to be shifted between months.

The *IESO* will determine the hourly average *real-time market LMPs* at the *resource*, node  $n$ , for months  $\{m_0, m_0 + 1, \dots, m^{SH}\}$  on the reference dates.

$LMP_{n,d,h}^{m,y-1}$  is the reference hourly average *real-time market LMP* at node  $n$  in hour  $h$  of day  $d$  of month  $m$  in year  $y - 1$ .

**Creating the Forecasted LMPs**

*Settled* and future *day-ahead market* peak and off-peak prices at NYISO Zone A, sourced from the Intercontinental Exchange (ICE) will be used to adjust base *LMPs* to create the set of forecast *LMPs* for the upcoming storage horizon.

Let

- $Hours_{on-peak}^{d,m,y-1}$  be the set of on-peak hours in day  $d$  of month  $m$  in year  $y - 1$  <sup>2</sup>
- $Hours_{off-peak}^{d,m,y-1}$  be the set of off-peak hours in day  $d$  of month  $m$  in year  $y - 1$

<sup>2</sup> For weekend days, this set will be empty.

For each month  $m \in \{m_0, m_0 + 1, \dots, m^{SH}\}$ , the IESO will determine the average of the settled day-ahead market LMPs in Zone A from the NYISO market for on-peak hours and for off-peak hours in each month  $m$ .

$$AveLMP_{NYISO\ Zone\ A, on-peak}^{m, y-1} = \frac{\sum_{d=1}^{\# \text{ days in } m} \sum_{h \in \text{Hours}_{on-peak}^{d, m, y-1}} LMP_{NYISO\ Zone\ A, d, h}^{m, y-1}}{\sum_{d=1}^{\# \text{ days in } m} \text{Number of hours in Hours}_{on-peak}^{d, m, y-1}}$$

$$AveLMP_{NYISO\ Zone\ A, off-peak}^{m, y-1} = \frac{\sum_{d=1}^{\# \text{ days in } m} \sum_{h \in \text{Hours}_{off-peak}^{d, m, y-1}} LMP_{NYISO\ Zone\ A, d, h}^{m, y-1}}{\sum_{d=1}^{\# \text{ days in } m} \text{Number of hours in Hours}_{off-peak}^{d, m, y-1}}$$

ICE produces futures day-ahead market prices for on-peak energy in each month  $m \in \{m_0, m_0 + 1, \dots, m^{SH}\}$  in year  $y$  at NYISO Zone A. Also, ICE produces futures day-ahead market prices for off-peak energy in each month  $m \in \{m_0, m_0 + 1, \dots, m^{SH}\}$  in year  $y$  at NYISO Zone A.

$$IcePrice_{NYISO\ Zone\ A, on-peak}^{m, y}$$

$$IcePrice_{NYISO\ Zone\ A, off-peak}^{m, y}$$

Calculate the factors:

$$Factor_{on-peak}^{m, y} = \left( \frac{IcePrice_{NYISO\ Zone\ A, on-peak}^{m, y}}{AveLMP_{NYISO\ Zone\ A, on-peak}^{m, y-1}} \right)$$

$$Factor_{off-peak}^{m, y} = \left( \frac{IcePrice_{NYISO\ Zone\ A, off-peak}^{m, y}}{AveLMP_{NYISO\ Zone\ A, off-peak}^{m, y-1}} \right)$$

These factors are used to adjust the base LMPs,  $LMP_{n, d, h}^{m, y-1}$  to produce the set of forecasted LMPs,  $LMP_{n, d, h}^{m, y}$ .

In the following, assume that hour  $h$  on day  $d$  in month  $m$  of year  $y$  and hour  $h$  on day  $d$  in month  $m$  of year  $y - 1$  are either both on-peak or both off-peak.

If hour  $h$  on day  $d$  in month  $m$  in year  $y$  is on-peak, set

$$LMP_{n, d, h}^{m, y} = Factor_{on-peak}^{m, y} \times LMP_{n, d, h}^{m, y-1}$$

If hour  $h$  on day  $d$  in month  $m$  in year  $y$  is off-peak, set

$$LMP_{n,d,h}^{m,y} = \text{Factor}_{\text{off-peak}}^{m,y} \times LMP_{n,d,h}^{m,y-1}$$

### Adjusting the Forecast LMPs for Efficiency

The *IESO* will adjust the forecast *LMPs* by an efficiency factor to determine the storage horizon opportunity cost.

The following assumptions underpin the rationale for the efficiency adjustment:

- absent ex-ante mitigation, *resources* would produce within the storage horizon at the efficiency rating of the *resource*; and
- when a hydroelectric *resource* is mitigated, it will result in it being dispatched above the efficiency rating of the *resource*.

The following data will be used to determine the efficiency adjustment that will be used for a *resource*.

#### Efficiency adjustment

The Efficiency Adjustment is a constant factor of 1.07 and reflects the decrease of relative efficiency between the output at the best efficiency point and the maximum output while head is constant.

$$\text{Efficiency Adjustment} = 1 + \text{Max. Output Loss}$$

Where:

- *Max. Output Loss* = 0.07 or 7%

To adjust the forecast *LMPs* for efficiency, the *IESO* multiplies each forecast *LMP* by the efficiency adjustment. This creates the set of efficiency-adjusted forecast *LMPs*.

#### Efficiency adjustment request for a resource with a single generating unit

Should a *market participant* indicate that its unit's efficiency decrease is higher than the efficiency modifier provided, the *market participant* may request an alternative value by submitting supporting documentation, on a unit-by-unit *resource* basis. This documentation must be submitted during the *reference level* submissions and include one of the following:

1. Hill chart provided by the manufacturer for the unit highlighting efficiency at the peak efficiency point and the maximum output for the unit. The two points must be at the head level at which the peak efficiency is achieved, and within the operating range of the unit.

2. Efficiency curve for the unit at any constant head level within the operating range, which shows either efficiency vs. power, or efficiency vs. gate.
  - a) Absolute or relative (by index testing) efficiency curves are acceptable
  - b) Efficiency curves shall be prepared by a third party. A third party is an engineering or consulting service and is not affiliated with the *market participant*.

In the supporting documentation for each unit, the *market participant* shall provide to the *IESO* the following information:

- a) Capacity (MW) at best/peak efficiency point of the unit
- b) Capacity (MW) at maximum output of the unit
- c) Single head value (m) for both best/peak efficiency and maximum output
- d) Efficiency (%) at best/peak efficiency
- e) Efficiency (%) at maximum output

The following table provides an example of the efficiency calculation.

**Table 6-3: Example of Efficiency Calculation**

Point	Description	Head	Efficiency	Power (% Rated)
1	Best Efficiency Point	25	92.50%	81%
2	Rated Conditions (Head + Power)	25	89%	100%

Relative Efficiency is calculated as:

$$-1 \times (89\% - 92.5\%) / 92.5\% = 3.78\%$$

The *resource's* efficiency loss is 3.78%

Efficiency adjustment request for a *resource* with multiple aggregated generating units

For *resources* comprised of multiple *generating units*, a *market participant* may use a capacity weighting of the efficiency values of individual units to determine the total efficiency adjustment for the *resource*. The supporting documentation required from the *market participant* remains the same as the requirements for *resource* with a single *generating unit*, which are detailed in the previous section.

The following steps describe how to complete the efficiency adjustment calculation for a *resource* with multiple *generating units*:

- For each unit, calculate the flow in (m<sup>3</sup>/s) at best efficiency and maximum output using the gathered inputs. To calculate the flow, use the following equation:

$$Capacity \times 1000 / (Head \times 9.8 \times Efficiency) = Flow (m^3/s)$$

**Table 6-4: Step 1 of Multiple Units Efficiency Calculation Example**

		Unit A	
Variable	Unit of Measure	Best Efficiency	Maximum Output
Capacity	MW	18	20
Head	m	30	30
Efficiency	%	95%	90%
Flow	m <sup>3</sup> /s	64.4	75.6

- Sum the capacity and flow values across each unit to get a total value for each variable. The head in meters remains a fixed input and doesn't change in this calculation. The following table illustrates an example of adding the best efficiency capacity megawatts of Unit A (18 MW), Unit B (4 MW) and Unit C (10 MW) into the Total column (18+4+10= 32 MW).

**Table 6-5: Step 2 of Multiple Units Efficiency Calculation Example**

Variable	Unit A		Unit B		Unit C		Total	
	Best Efficiency	Maximum Output	Best Efficiency	Maximum Output	Best Efficiency	Maximum Output	Best Efficiency	Maximum Output
Capacity	18	20	4	10	10	15	32.0	45.0
Head	30	30	30	30	30	30	30	30
Efficiency	95%	90%	85%	80%	92%	80%		
Flow	64.4	75.6	16.0	42.5	37.0	63.8	117.4	181.9

- Calculate, for all the units, the best efficiency and efficiency at maximum output by substituting the total capacity, head and flow using the following equation:

$$Efficiency = Capacity * 1000 / (Flow * 9.8 * Head)$$

~~$$Efficiency = Capacity * 1000 / (Flow * 9.8 * Head)$$~~

**Table 6-6: Step 3 of Multiple Units Efficiency Calculation Example**

	Total	
Variable	Best Efficiency	Maximum Output
Capacity	32.0	45.0
Head	30	30
Efficiency	<b>92.6%</b>	<b>84.1%</b>
Flow	117.4	181.9

- Determine the maximum output loss as the difference between the *resource's* calculated best efficiency and efficiency at maximum output.

$$\text{Relative Efficiency: } -1 \times (84.1\% - 92.6\%) / 92.6\% = 9.18\%$$

The *resource's* efficiency loss across all its units is 9.18%

### Determining the Storage Horizon Opportunity Cost

The *IESO* orders the efficiency-adjusted forecast LMPs,  $LMP_{n,d,h}^{m,y}$ , over the storage horizon from highest to lowest. The greater of \$0/MWh and the value which is greater than 98% ( $P\%$ ) of the LMPs over the storage horizon is the storage horizon opportunity cost.

For example, suppose that the storage horizon starts on day 5 of April and ends on day 4 of August. The storage horizon has 122 days and includes 2,928 hours. Choosing the 98<sup>th</sup> percentile would set the opportunity cost based on the 58<sup>th</sup> highest hourly *LMPs* over the storage horizon.

### Storage Horizon Opportunity Cost under Option 2

#### Creating the Base LMPs

Using the registered storage horizon length, the *IESO* will determine the dates of the *resource's* storage horizon that immediately follow the current *dispatch day* (the forecast period). For these calculations, let the current day and month on which opportunity costs are being determined be denoted  $d_0$  and  $m_0$ . Let the storage horizon



be  $d^{SH}$  days long and assume that these days in the storage horizon are contained in months  $\{m_0, m_0 + 1, \dots, m^{SH}\}$  in the year  $y$ .

The *IESO* will also determine the dates for the *resource's* 28-day study period that immediately precede the current *dispatch day* that will provide the reference data. The *IESO* will calculate the average *LMP* at the *resource's* node,  $n$ , for each hour and day of the week over the study period (*SP*).

Let:

- $LMP_{n,d,h}^{SP}$  be the hourly *LMP* at node  $n$  in hour  $h$  of day  $d$  in *SP*
- $\delta(d, SP)$  = Day of Week of day  $d$  in *SP*<sup>3</sup>
- *DOW* be the day of the week for which the average is being calculated.

Calculate:

$$AveLMP_{n,h}^{DOW} = \frac{\sum_{d \in SP \cap \{d | \delta(d, SP) = DOW\}} LMP_{n,d,h}^{SP}}{\text{Count of } LMP_{n,d,h}^{SP} \text{ in } (d \in SP \cap \{d | \delta(d, SP) = DOW\})}$$

### Creating the Forecasted LMPs

ICE peak and off-peak futures prices at NYISO Zone A will be used to adjust these average *LMPs* to develop a forecast of hourly *LMPs* over the months in the upcoming storage horizon, months  $m_0, m_0 + 1, \dots, m^{SH}$ .

Let:

- $Hours_{on-peak}^{d,SP}$  be the set of on-peak hours in day  $d$  in *SP*
- $Hours_{off-peak}^{d,SP}$  be the set of off-peak hours in day  $d$  in *SP*

---

<sup>3</sup> For day  $d$  in month  $m$  in the storage horizon, let  $\delta(d, m)$  = Day of Week of day  $d$  in month  $m$

For the study period, determine the average of the *settled day-ahead market LMPs* in Zone A from the NYISO market for on-peak hours and for off-peak hours in the *SP*.

$$AveLMP_{NYISO\ Zone\ A, on-peak}^{SP} = \frac{\sum_{d \in SP} \sum_{h \in Hours_{on-peak}^{d, SP}} LMP_{NYISO\ Zone\ A, d, h}^{SP}}{\sum_{d \in SP} \text{Number of hours in } Hours_{on-peak}^{d, SP}}$$

$$AveLMP_{NYISO\ Zone\ A, off-peak}^{SP} = \frac{\sum_{d \in SP} \sum_{h \in Hours_{off-peak}^{d, SP}} LMP_{NYISO\ Zone\ A, d, h}^{SP}}{\sum_{d \in SP} \text{Number of hours in } Hours_{off-peak}^{d, SP}}$$

ICE produces futures prices for on-peak *energy* in each month *m* in the storage horizon at NYISO Zone A. Also, ICE produces futures prices for off-peak *energy* in each month *m* in the storage horizon at NYISO Zone A.

$$\begin{aligned} &IcePrice_{NYISO\ Zone\ A, on-peak}^m \\ &IcePrice_{NYISO\ Zone\ A, off-peak}^m \end{aligned}$$

Calculate the factors for each month:

$$\begin{aligned} Factor_{on-peak}^m &= \left( \frac{IcePrice_{NYISO\ Zone\ A, on-peak}^m}{AveLMP_{NYISO\ Zone\ A, on-peak}^{SP}} \right) \\ Factor_{off-peak}^m &= \left( \frac{IcePrice_{NYISO\ Zone\ A, off-peak}^m}{AveLMP_{NYISO\ Zone\ A, off-peak}^{SP}} \right) \end{aligned}$$

Multiply the previously calculated average *LMPs* for each hour in the given day of the week by the calculated multipliers to produce an estimate of the future *LMP* for each hour in the storage horizon.

If hour *h* on day *d* in month *m* is on-peak, set

$$LMP_{n, d, h}^m = Factor_{on-peak}^m \times AveLMP_{n, h}^{\delta(d, m)}$$

If hour *h* on day *d* in month *m* in year *y* is off-peak, set

$$LMP_{n, d, h}^m = Factor_{off-peak}^m \times AveLMP_{n, h}^{\delta(d, m)}$$

## Adjusting the Forecast LMPs for Efficiency

Option 2 uses the same approach to create the set of efficiency-adjusted forecast *LMPs* for the storage horizon as does option 1, a short summary of the methodology found above is shown in this section.

The Efficiency Adjustment is a constant factor of 1.07 and reflects the decrease of relative efficiency between the output at the best efficiency point and at maximum output while head is constant.

$$\text{Efficiency Adjustment} = 1 + \text{Max. Output Loss}$$

Where:

- *Max. Output Loss* = 0.07 or 7%

A *market participant* may indicate that its unit(s)' relative efficiency decrease is higher than the efficiency modifier provided. In this case, the *market participant* may request an alternative value for the efficiency adjustment by submitting supporting documentation, on a unit-by-unit *resource* basis. The supporting documentation required is described under the first option.

To adjust the forecast *LMPs* for efficiency, the *IESO* multiplies each forecast *LMP* by the efficiency adjustment. This creates the set of efficiency-adjusted forecast *LMPs*.

### Determine the Storage Horizon Opportunity Cost

The storage horizon opportunity cost is the maximum of \$0/MWh and the largest efficiency-adjusted forecast *LMP* forecast over all hours in the storage horizon.

#### 6.4.5. The Forebay Refill Opportunity Cost

(MR Ch. 7, section 22.4.3 and 22.5)

An *energy limited resource* that is also a hydroelectric *resource* that may submit *offers* for *operating reserve* may incur an opportunity cost if it uses the limited water in its *forebay* to produce *energy* in the current *dispatch day* when the level of water in its *forebay* is sufficiently low, which may result in the *resource* forgoing *operating reserve* revenues in future *dispatch days*.

This opportunity cost reflects the value of these future *operating reserve* revenues when the circumstances are such that if the *resource* produces *energy*, it would be unable to provide *operating reserve* until such a time as sufficient inflows have been received into the *resource's forebay*.

For *resources* that are registered as part of a *cascade group*, this opportunity cost is only determined for the *resources* at the *forebay* at the top of the *cascade group*. This

opportunity cost is used as an input when calculating *energy offer reference level values* for *resources* that are registered as part of a *cascade group*, as described in section 7.2.4. The *forebays* of the downstream *resources* are accounted for when determining the *forebay* refill opportunity cost, as described in section 6.4.5.3.

A *market participant* wishing to include the *forebay* refill opportunity cost in its *energy offer reference level* may request alternate cost profile *reference levels* consistent with **MR Ch. 7, s. 22.4.3**. In order to request use of the alternate cost profile *reference levels* that include the *forebay* refill opportunity cost in accordance with **MR Ch. 7, s. 22.5.6**, the *market participant* must notify the *IESO* when the relevant conditions have been met and submit supporting documentation demonstrating that these conditions were met. Specifically, when a *resource* has three hours of water remaining in its *forebay*, it may submit a request to the *IESO* to request use of the alternate cost profile *reference levels* that include this opportunity cost. The window to submit use of this request is described in Section 5.1. Such supporting documentation includes, but is not limited to, documentation that shows the actual headwater levels and a curve of headwater level versus storage (in hours). If the curve relates only to cubic meters, the *IESO* also requires the flow rate of units to calculate hours of operation. Once the request has been submitted to the *IESO*, the *IESO* will begin including this opportunity cost in the *reference level value* calculation of the *resource*.

#### 6.4.5.1. Eligibility

The *forebay* refill opportunity cost may be used by a *dispatchable energy limited resource* that is a hydroelectric *resource* that provides any class of *operating reserve* into *IESO-administered markets*, including *dispatchable* hydroelectric *resources* that are registered with the *IESO* as part of a *cascade group*. The steps to calculate the *forebay* refill opportunity cost differ for a *resource* that is registered with the *IESO* as part of a *cascade group* compared to a *resource* that is not registered with the *IESO* as part of a *cascade group*. [Section 6.4.5.3](#)~~Section~~ describes the steps used to calculate the *forebay* refill opportunity cost in each approach.

A *market participant* may request alternate cost profile *reference levels* that include the *forebay* refill opportunity cost in accordance with **MR Ch. 7, s. 22.4.3**. The *market participant* must submit additional data during the process to determine the *resource's energy offer reference level*.

The following information must be submitted to the *IESO* to determine the relevant *energy offer reference level*:

- MW rating at best efficiency;
- volume of water required to refill 1 hour of production at best efficiency rating; and
- five-year historical hourly inflows into the *forebay*.

### 6.4.5.2. Application

The *forebay* refill opportunity cost is calculated by the *market participant* during the process to determine *reference levels* and is incorporated into the determination of *reference level values* for the *day-ahead market* and the *real-time market*.

This calculation may be updated at the request of either the *market participant* or the *IESO* by using the process to determine *reference levels*.

A *resource* that uses the *forebay* refill opportunity cost will have two *energy offer reference levels*: one that does not account for the *forebay* refill opportunity cost (a lower-cost profile) and one that accounts for the *forebay* refill opportunity cost (a higher-cost profile). The *IESO* will use the lower-cost profile *reference level* by default. If the *resource* meets the conditions described in [section 6.4.5](#), and the *market participant* notifies the *IESO* and submits the relevant supporting information in accordance with **MR Ch. 7, s. 22.5.6**, the *IESO* will use the higher-cost profile that accounts for the *forebay* refill opportunity cost.

For *dispatchable resources* that are part of a *cascade group*, if a *resource* at the first upstream *forebay* in the *cascade group* meet the conditions described in [section 6.4.5](#), and the *market participant* notifies the *IESO* and submits the relevant supporting documentation, the *IESO* will use the higher-cost profile *reference level* for that *resource* in the first upstream *forebay*. The following example describes a *cascade group resource* in the first *forebay* meeting the condition in section 6.4.5 to request use of this opportunity cost.

Example:

A *cascade group* has ~~6~~six *dispatchable resources* and three *forebays*. Each *forebay* has two *dispatchable resources* registered to it.

**Table 6-7: Example of Requesting Forebay Refill Opportunity Cost for a Cascade Group Resource**

Forebay	Resource
1	A
1	B
2	C
2	D
3	E
3	F

Resource A has **3three** hours of water remaining to generate *energy* at the *resource's* best efficiency rating, and the *market participant* requests use of the *forebay* refill opportunity cost. Because an *energy offer reference level* for *cascade group resources* is constructed for *resources* in the first *forebay*, the request for Resource A will indirectly impact the calculation of *energy offer reference level values* for downstream Resources C, D, E, and F. Note that if Resource B also had three hours of *energy* generation remaining, the relevant *market participant* could have also requested use of the *forebay* refill opportunity cost with similar indirect impacts to the calculation of *energy offer reference level values* for downstream Resources C, D, E, and F.

### 6.4.5.3. Methodology

This section details two approaches to calculate the time to refill the *forebay*: one for *resources* that are registered as part of a *cascade group* and one for those *resources* that are not.

A *market participant* must carry out the following calculations to determine the *forebay* refill opportunity cost. The *market participant* must submit the data that is used in the calculation and sufficient description of the steps of the calculation for the *IESO* to be able to assess whether the calculation conforms to the below methodology.

The first step of the calculation is for the *market participant* to determine the number of days of *operating reserve* revenues that a *resource* forgoes if it uses the *operating reserve* standby water in a *dispatch* day. The next step is to calculate the time required to refill the *resource's forebay* with enough water to provide one hour of *operating reserve*. This time is measured in days and is calculated as follows:

1. Determine the volume of water in  $\text{m}^3$  that would be used by the *resource* to produce *energy* at its efficiency rating for one hour. Denote this volume of water by  $V^{1hr}$  and the power production at the efficiency rating by  $Power^{ER}$ .
2. Determine a **5five**-year historical study period, *e.g.* years  $y^0, y^0 - 1, y^0 - 2, y^0 - 3, y^0 - 4$ .<sup>4</sup> Obtain the historical average rate of inflow into the *forebay* in  $\text{m}^3/\text{sec}$  for each day in this study period. Denote the average inflow rate on day  $d$  of month  $m$  of year  $y$  by  $Flow_{d,m,y}$ . Depending upon the number of leap years in the **5five**-year study period, there will be either 1826 days or 1827 days of flow data for the study period.
3. Determine any minimum flow requirement from the *forebay* in  $\text{m}^3/\text{sec}$  for each day in the historical study period adjusted for any regulatory changes. Denote the minimum flow rate in  $\text{m}^3/\text{sec}$  on day  $d$  of month  $m$  of year  $y$  by  $Flow_{d,m,y}^{min}$ .

---

<sup>4</sup> If the historical period starts within a year, the first and last years in the period may be partial. In this case, the study period may span months in years  $y^0, y^0 - 1, y^0 - 2, y^0 - 3, y^0 - 4, y^0 - 5$  with years  $y^0$  and  $y^0 - 5$  having less than 12 months in the study period.

Calculate the net inflow rate for day  $d$  in month  $m$  of year  $y$  as

$$NetFlow_{d,m,y} = Flow_{d,m,y} - Flow_{d,m,y}^{min}$$

- Calculate the average of the historical daily net inflow data over a seven-day rolling period. For each day in the study period, calculate the average of the historical net inflows over the seven days ending on  $(d, m, y)$ :<sup>5</sup>

6

$$NetFlow_{d,m,y}^{7-day\ average} = \left( \sum_{i=0}^6 NetFlow_{d-i,m,y} / 7 \right)$$

- Determine the 5<sup>th</sup> percentile level<sup>7</sup> of the seven-day rolling averages<sup>8</sup> of the net daily inflow rate over all seven-day averages calculated in Step 4 for the days in the historical study period. Denote the 5<sup>th</sup> percentile level by  $NetFlow^{P5}$ . Let  $NetFlow^{P5}$  occur in month  $\hat{m}$  of year  $\hat{y}$ . Month  $\hat{m}$  and year  $\hat{y}$  are the month and year in which the 5<sup>th</sup> percentile level of flow occurs in the historical study period. The following tie-breaking rule will apply only when the 5<sup>th</sup> percentile level identifies more than one month as  $\hat{m}$ : the month with the highest occurrence of the 5<sup>th</sup> percentile level average net inflow is  $\hat{m}$ . If the use of the mode continues to produce more than one eligible month as  $\hat{m}$ , then a secondary tie-breaking rule applies: from the months identified in the first tie-breaking result, the month with the lowest average net inflow is designated as  $\hat{m}$ . If there is still more than one eligible month, the *market participant* selects  $\hat{m}$  from the remaining eligible months after applying the first and second tie-breaking rules.
- The time in seconds required to refill the volume  $V^{1hr}$  at a flow rate of  $NetFlow_{d,m,y}^{7-day\ average}$  is given by

<sup>5</sup> Flows and minimum flows on days for up to six days before the start of the study period may be needed to calculate the seven-day rolling average of daily net inflows for the days at the start of the study period.

<sup>6</sup> If  $d-i \leq 0$ , the day indicated is in the prior month (and possibly prior year). For a day at the start of the study period, it may indicate a day before the start of the study period which is why flow data prior to the study period may be needed to calculate the seven-day rolling average net inflow at the start of the study period.

<sup>7</sup> Let  $X$  be a set and let  $Card(X)$  be the number of data points in the set  $X$ . For the historical flow data over the study period, find  $NetFlow^{P5}$ , the flow level for which

$$\frac{Card(\{NetFlow_{d,m,y}^{7-day\ average} | NetFlow_{d,m,y}^{7-day\ average} \leq NetFlow^{P5}, (d, m, y) \in Study\ Period\})}{Card(\{NetFlow_{d,m,y}^{7-day\ average} | NetFlow_{d,m,y}^{7-day\ average} \leq \infty, (d, m, y) \in Study\ Period\})} = 0.05$$

<sup>8</sup> Seven-day rolling average would be calculated by moving one day with every calculation of the net daily inflow, for example, the first  $NetFlow_{d,m,y}^{7-day\ average} = (\sum_{i=0}^6 NetFlow_{d-i,m,y} / 7)$ , then the second  $NetFlow_{d,m,y}^{7-day\ average} = (\sum_{i=0}^6 NetFlow_{d+1-i,m,y} / 7)$ , and so on. In plain language, today we would take the average net inflow of the past seven days and for each subsequent day, we repeat the same calculation taking the past seven-day average net inflow relative to each subsequent day.

$$\frac{V^{1hr}}{NetFlow_{d,m,y}^{7-day\ average}}$$

7. The 95<sup>th</sup> percentile of the time in seconds required to fill a volume of  $V^{1hr}$  at the seven-day rolling averages of the net flow rates over the study period is given by:

$$FillTime_{sec}^{P95} = \frac{V^{1hr}}{NetFlow^{P5}}$$

8. Convert  $FillTime_{sec}^{P95}$  from Step 7 into a number of days figure by dividing the value by 60sec/min ÷ 60min/hr ÷ 24hr/day.

$$FillTime_{days}^{P95} = \frac{\left( \frac{V^{1hr}}{NetFlow^{P5}} \right)}{\left( \frac{60\ sec}{1\ min} \times \frac{60\ min}{1\ hr} \times \frac{24\ hr}{1\ day} \right)}$$

9. The minimum of  $FillTime_{days}^{P95}$  and 31 days is set as the time to refill the *forebay* ( $FillTime_{days}$ ) for 1 hour of water to offer as *operating reserve*.

$$FillTime_{days} = \text{Min}(FillTime_{days}^{P95}, 31\ days)$$

10. If the *resource* is not part of a *cascade group*, proceed to step 11. If the *resource* is part of a *cascade group*, perform the following steps (a) to (e):
- a. For every *dispatchable resource* associated with any *forebays* from the *cascade group*, complete steps 1-9 to determine the time required to refill the *forebay* for each *resource* ~~on~~in the relevant *cascade group*.



**Table 6-8: Step 1 Example of Determining the Refill Time for Resources in a Cascade Group**

Forebay	Resource	Refill Time (days)
1	A	5
1	B	22
2	C	6
2	D	3
3	E	2
3	F	7

- b. For each *forebay* downstream of Forebay 1 in the *cascade group*, select the *resource* with the longest refill time. In the example below, Resource C is selected for Forebay 2 and Resource F is selected for Forebay 3.

**Table 6-9: Step 2 Example of Determining the Refill Time for Resources in a Cascade Group**

Forebay	Resource	Refill Time (days)
1	A	5
1	B	22
<b>2</b>	<b>C</b>	<b>6</b>
2	D	3
3	E	2
<b>3</b>	<b>F</b>	<b>7</b>

- c. Sum the selected refill times for *resources* downstream of Forebay 1 from Step 10(b) to create the "All Downstream" refill time shown below:

**Table 6-10: Step 3 Example of Determining the Refill Time for Resources in a Cascade Group**

Forebay	Resource	Refill Time (days)
1	A	5
1	B	22
2	C	6
3	F	7
All Downstream	C, F	6+7=13

- d. For each *resource* located at Forebay 1 in the *cascade group*, add the "All Downstream" refill time from Step 10(c) to the *resource's* refill time to create the "Cascade" *forebay* refill times shown below. Note: There will be a "Cascade" *forebay* refill time created for each *resource* located at Forebay 1 in the *cascade group*.

**Table 6-11: Step 4 Example of Determining the Refill Time for Resources in a Cascade Group**

Forebay	Resource	Refill Time (days)
1	A	5
1	B	22
All Downstream	C, F	13
Cascade	A	5+13=18
Cascade	B	22+13=35

- e. For each *resource* located at Forebay 1, take the minimum of the "Cascade" time from step 10(d) and 31 days. This duration is the time to refill the *forebay* for each *resource* located at Forebay 1 of the *cascade*

*group* and accounts for the time required to refill *forebays* of *resources* located at downstream *forebays*.

**Table 6-12: Step 4 Example of Determining the Refill Time for Resources in a Cascade Group**

Forebay	Resource	Time to Refill Forebay (days)
Cascade	A	Min(18, 31)=18

11. Calculate the potential foregone *operating reserve* revenue using the number of days required to refill a *forebay*. For a *resource* in a *cascade group*, the IESO calculates *reference level values* for the *resources* located at the top *forebay* of a *cascade group*, and then derives the downstream *resource reference level values*, per Section 7.2.5. The foregone *operating reserve* revenues are only determined for *resources* located at Forebay 1 of a *cascade group* (Resource A and Resource B in the example provided). The number of days required to determine potential foregone *operating reserve* revenues can be referred to in:
  - a. Step 9, for a *resource* not registered as part of a *cascade group*; or
  - b. Step 10(e), for a *resource* in the top *forebay* of a registered *cascade group*.
12. Collect the *real-time market operating reserve* schedules and prices for the *resource* for the calendar month  $\hat{m}$  selected in Step 5, from the section titled “Calculate the Time Required to Fill the Forebay for a Single Resource”, over all of the years in the study period,  $y^0, y^0 - 1, y^0 - 2, y^0 - 3, y^0 - 4$ .

$$\begin{aligned}
 OR_{h,\hat{m},y}^{10S} &= 10S \text{ Schedule in hour } h \text{ of month } \hat{m} \text{ of year } y \\
 OR_{h,\hat{m},y}^{10N} &= 10N \text{ Schedule in hour } h \text{ of month } \hat{m} \text{ of year } y \\
 OR_{h,\hat{m},y}^{30R} &= 30R \text{ Schedule in hour } h \text{ of month } \hat{m} \text{ of year } y \\
 PR_{h,\hat{m},y}^{10S} &= 10S \text{ Price in hour } h \text{ of month } \hat{m} \text{ of year } y \\
 PR_{h,\hat{m},y}^{10N} &= 10N \text{ Price in hour } h \text{ of month } \hat{m} \text{ of year } y \\
 PR_{h,\hat{m},y}^{30R} &= 30R \text{ Price in hour } h \text{ of month } \hat{m} \text{ of year } y
 \end{aligned}$$

13. Calculate historical *real-time market hourly operating reserve* revenue for the *resource* in each hour for during month  $\hat{m}$  in the **five** years of the historical study period.

$$\begin{aligned}
 &OR \text{ Revenue in hour } h \text{ of month } \hat{m} \text{ of year } y \\
 &= OR_{h,\hat{m},y}^{10S} \times PR_{h,\hat{m},y}^{10S} + OR_{h,\hat{m},y}^{10N} \times PR_{h,\hat{m},y}^{10N} + OR_{h,\hat{m},y}^{30R} \times PR_{h,\hat{m},y}^{30R}
 \end{aligned}$$

14. Determine the monthly average hourly *real-time market operating reserve* revenue for the *resource* in month  $\hat{m}$  in the historical study period.

$$\begin{aligned} & \text{Monthly average hourly real} \\ & \text{– time OR Revenue in month } \hat{m} \text{ over the years in the study period} = \\ & \frac{\sum_{y=y^0}^{y^*} \sum_{h=1}^{\text{Number of hours in month } \hat{m} \text{ of year } y} \text{OR Revenue in hour } h \text{ of month } \hat{m} \text{ of year } y}{\sum_{y=y^0}^{y^*} \text{Number of hours in month } \hat{m} \text{ of year } y} \end{aligned}$$

15. Multiply the average from Step 14 by 24 hours to obtain a daily *operating reserve* revenue value.

$$\begin{aligned} & \text{Daily real – time OR Revenue for month } \hat{m} = \\ & 24 \times \text{Average hourly real} \\ & \text{– time OR Revenue in month } \hat{m} \text{ over the years in the study period} \end{aligned}$$

16. Multiply the daily *operating reserve* revenue from Step 15 by the number of days to refill *forebay* from Step 10 (e) for a *resource* that is part of a *cascade group* or by Step 9 for a *resource* that is not part of a *cascade group* to estimate the lost revenue.

$$\text{Lost Revenue} = \text{FillTime}_{\text{days}} \times \text{Daily real – time OR Revenue in month } \hat{m}$$

17. Divide the Lost Revenue from Step 16 by the *energy* that would be produced in an hour when operating for an hour at the efficiency rating to obtain the *forebay* refill opportunity cost for an hour. This is the \$/MWh opportunity cost adder.

$$\text{Opportunity Cost} = \frac{\text{Lost Revenue}}{\text{Power}^{\text{ER}} \times 1\text{hr}}$$

## 6.5. Costs Related to Start-Up Offers

All costs associated with start-up are eligible for inclusion in a *resource's reference levels*. This includes start-up fuel volume costs related to the amount of fuel needed to start a thermal *resource*. This value may vary depending on how long the *resource* has been offline. Thermal *resources* are allowed to submit different start-up fuel volumes for starting up from a cold, warm and hot *thermal states*. Different *start-up offer reference levels* will be determined for each *thermal state* of the *resource*.

For non-thermal *resources* that have start-up costs but do not submit *start-up offers*, these costs are reflected in *energy offer reference levels*. [Section 7](#) further identifies relevant cost components for start-up costs for different technology types.

## 6.6. Costs Related to Speed No-Load Offers

*Speed no-load costs* include fuel costs and O&M costs.

The fuel cost component is the fuel burn that would be hypothetically consumed if the *resource* were to back down to a zero power output while staying synchronized to the *IESO-controlled grid*.

Depending on the *resource*, heat rate curves may show that there is some level of fuel consumption that is not attributable to incremental production.

For example, if a *resource* had the following heat rate curve and incremental heat rate curve, some fuel cost is fixed and not attributable to incremental production:

Heat rate curve:

$$HR(MWh) = 5MWh^2 + 2MWh + 5$$

For this *resource*, the *speed no-load cost* of fuel is 5GJ/hr multiplied by the applicable total fuel-related costs. Another way of understanding the fuel cost component of *speed no-load cost* is that it is the y-intercept of the heat input curve multiplied by the applicable total fuel-related costs.

The presence of *speed no-load costs* in *reference levels* does not signify that the *IESO* ~~that~~ will model *resources* in this operating state (synchronized but not injecting). Rather, it is a method to allow *reference levels* to more accurately match the shape of cost curves, where appropriate.

The *reference level* methodology uses the approach of separating the fixed hourly costs of synchronized operation from costs associated with incremental production.

For *resources* that have speed no-load costs but do not submit *speed no-load offers*, these costs are reflected in *energy offer reference levels*. *Speed no-load offers* are used by the *IESO* to determine the commitment and scheduling of *non-quick start resources* that are eligible for the generator *offer* guarantee make-whole payment. The speed no-load fuel consumption should be allocated to the *energy offer reference level* for the *minimum loading point* output as follows:

$$\begin{aligned} & \text{Speed No Load Fuel Consumption}_{MLP-Energy} \\ &= \text{Speed No Load Fuel Consumption} \\ & \div \text{Minimum Loading Point Speed No Load Fuel Consumption}_{MLP-Energy} \\ &= \text{Speed No Load Fuel Consumption} / \text{Minimum Loading Point} \end{aligned}$$

## 6.7. Costs Related to Operating Reserve Offers

*Operating reserve offer reference levels* for 10-minute synchronized, 10-minute non-synchronized and 30-minute non-synchronized *operating reserve* are based on incremental costs associated with posturing a *resource* to be able to provide additional

*energy*. These *reference levels* are not based on the costs associated with the injection of additional *energy*.

**— End of Section —**

## 7. Reference Levels for Financial Dispatch Data Parameters

(MR Ch. 7, ss. 22.1.1, 22.1.3, 22.2.1, and 22.2.2)

*Reference levels for financial dispatch data parameters are the short-run marginal costs of a resource that are incurred in the incremental production of energy or operating reserve. For resources that submit start-up and speed no-load offers, start-up offer reference levels and speed-no load offer reference levels represent the respective start-up costs or costs of operating in speed no-load for an hour. Different cost components apply to different technology types. The subsections below describe the technology-specific classifications of resources and their reference level formulas, cost components calculations and supporting documentation requirements. These cost components include:*

- incremental O&M costs;
- speed no-load costs;
- labour costs;
- opportunity costs;
- emission adders;
- electricity consumption/charging costs;
- fuel costs; and
- *operating reserve* costs.

If applicable, *reference levels* may employ additional performance factors to represent the efficiency of the technology type.

### 7.1. Thermal

*Resources* that are primarily fueled by natural gas, biomass or oil are categorized within this *market manual* as “thermal *resources*”. Thermal *resources* that use two types of fuel to generate electricity and that *offer* a choice with respect to the type of fuel that may be used to generate electricity, will be required to register *reference levels* for each fuel type.

There are four variants of thermal *resources*. The determination of the variant for a thermal *resource* is based on registered characteristics associated with that *resource*.

### Variant A:

Variant A thermal *resources* are thermal *resources* that have registered the following value:

- a quick-start flag value equal to "Y".

### Variant B:

Variant B thermal *resources* are thermal *resources* that have registered the following values:

- a quick-start flag value equal to "N";
- a start-up and speed-no-load eligibility flag equal to "N"; and
- relevant *facility* does not use *pseudo-unit* modelling.

### Variant C:

Variant C thermal *resources* are thermal *resources* that have registered the following values:

- a quick-start flag value equal to "N";
- a start-up and speed-no-load eligibility flag equal to "Y"; and
- relevant *facility* does not use *pseudo-unit* modelling.

### Variant D:

Variant D thermal *resources* are thermal *resources* that have registered the following values:

- A quick-start flag value equal to "N";
- A start-up and speed-no-load eligibility flag equal to "Y"; and
- Relevant *facility* uses *pseudo-unit* modelling.

Variant D thermal *resources* include the physical *resources* at a thermal *facility* that uses *pseudo-unit* modelling as well as the *pseudo-unit resources* at the same *facility*.

Thermal *resources* will be required to register the following *reference levels*:

### Variant A:

- *Energy offer reference level*; and
- *Operating reserve offer reference level*.

### Variant B:

- *Energy offer reference level*; and
- *Operating reserve offer reference level*.

### Variant C:

- *Energy offer reference level*;
- *Start-up offer reference level*;



- *Speed no-load offer reference level*; and
- *Operating reserve offer reference level*.

#### Variant D:

Variant D *resources* that are *pseudo-unit resources* require the following *reference levels* for *financial dispatch data*:

- *Energy offer reference level*;
- *Start-up offer reference level*;
- *Speed no-load offer reference level*; and
- *Operating reserve offer reference level*.

Variant D *resources* that are not *pseudo-unit resources* do not require *reference levels* for *financial dispatch data*.

To request a *reference level* that is affected by *thermal state*, a *market participant* determines the ambient conditions associated with hot, warm and cold *thermal state*. These ambient conditions will be used to determine all *thermal state*-affected *reference levels*.

This section describes how the applicable form should be completed to request a *reference level* and covers the following thermal *resource* technology types:

- combined cycle;
- fossil or biomass steam (biomass);
- simple cycle combustion turbine; and
- cogeneration.

#### 7.1.1. Combined Cycle

For the purposes of establishing *reference levels*, a combined cycle technology *resource* is considered to be a *resource* that uses both a combustion turbine *generation unit* and a steam turbine *generation unit* to generate electricity. The gas turbine exhaust heat flows to a conventional boiler or to a heat recovery steam generator to produce steam for use by a steam turbine *generation unit* in the production of electricity.

For combined cycle *resources*, the *IESO* will define one *reference level* using one of the configurations for combined cycle mode (e.g., 1x1, 2x1), and another *reference level* for *single cycle mode* for those *resources* that have a bypass stack or can otherwise operate the *resource* in *single cycle mode* absent the steam turbine.

### 7.1.1.1. Deriving Pseudo-Unit Reference Levels for a Combined Cycle Resource

*Reference levels* for *pseudo-units* are calculated based on physical unit parameters in a manner consistent with the translation between physical units and *pseudo-units* in the *IESO* systems.

For example, *reference levels* for *financial dispatch data parameters* for a *pseudo-unit* in 1x1 configuration will be determined based on aggregating the *reference levels* for the relevant combustion turbine with the *reference levels* for the steam turbine.

### 7.1.1.2. Treatment of Multiple Generation Facilities Modeled as a Single Resource

The *IESO* determines *reference levels* when modeling multiple *generation facilities* as a single *resource* as described below:

- for combined cycle *resources*, the *IESO* determines two sets of *reference levels* – one for the *single cycle mode* (if applicable) and one for the configuration selected for the combined cycle mode;
- for cogeneration *resources*, the *IESO* determines a single set of *reference levels*.

### 7.1.1.3. Treatment of Average Costs

This section applies to variant A and variant B thermal *resources*. Pursuant to **MR Ch. 7, s. 22.4.2**, the *IESO* determines two *energy offer reference levels* for a *resource* that has registered a “start-up cost and speed-no-load eligibility flag” value of “Y” and that has registered a primary fuel type of gas, oil, steam, or biomass.

For these *resources*, the *IESO* determines primary *reference levels* for *energy* and *operating reserve* based on the *resource’s short-run marginal costs* and secondary *reference levels* for *energy* based on the *resource’s average costs*. Refer to [section 7.1.3.2](#) for further details on how the *IESO* calculates primary and secondary *reference levels* for these *resources*.

## 7.1.2. Cogeneration Resources

Pursuant to **MR Ch. 7, s. 22.4.3**, the *IESO* determines two separate *reference levels* with or without steam turbine operations for cogeneration *resources*.

## 7.1.3. Reference level Equations

This section describes equations that are used to determine *reference levels* for *financial dispatch data parameters* of thermal *resources*. Equations are provided for each variant of thermal *resource*.

These equations show the categories of eligible costs for each *reference level* for a *financial dispatch data parameter*.

### 7.1.3.1. Variant C and Variant D Thermal Resources

The following equations are used to determine the specified *reference levels* for Variant C and Variant D *resources*:

$$\begin{aligned}
 & \text{Energy Offer Reference Level} \left( \frac{\$}{MWh} \right) \\
 &= (\text{Incremental Heat Rate} \left( \frac{GJ}{MWh} \right) \times \text{Total Fuel Related Costs} \left( \frac{\$}{GJ} \right) \\
 &\quad \times \text{Performance Factor}) + \text{Emission Costs} \left( \frac{\$}{MWh} \right) \\
 &\quad + \text{Operating and Maintenance Costs} \left( \frac{\$}{MWh} \right)
 \end{aligned}$$

$$\begin{aligned}
 & \text{Speed No Load Offer Reference Level} (\$/hr) \\
 &= (\text{Speed No Load Heat Consumption} \left( \frac{GJ}{hr} \right) \times \text{Total Fuel Related Costs} \left( \frac{\$}{GJ} \right) \\
 &\quad \times \text{Performance Factor}) + \text{Emission Costs} \left( \frac{\$}{hr} \right) \\
 &\quad + \text{Operating and Maintenance Costs} \left( \frac{\$}{hr} \right)
 \end{aligned}$$

$$\begin{aligned}
 & \text{Start – up Offer Reference Level} \left( \frac{\$}{\text{Start}} \right) \\
 &= \left( \text{Start Fuel Consumed} \left( \frac{GJ}{\text{start}} \right) \times \text{Total Fuel Related Cost} \left( \frac{\$}{GJ} \right) \right. \\
 &\quad \left. \times \text{Performance Factor} \right) \\
 &\quad + \left( \text{Start – up Station Service Quantity} \left( \frac{MWh}{\text{start}} \right) \right. \\
 &\quad \left. \times \text{Station Service Price} \left( \frac{\$}{MWh} \right) \right) + \text{Start – Up Emissions Costs} \left( \frac{\$}{\text{start}} \right) \\
 &\quad + \text{Operating and Maintenance Costs} \left( \frac{\$}{\text{start}} \right) + \text{Start} \\
 &\quad - \text{up Offer Escalation Factor}
 \end{aligned}$$

$$\begin{aligned}
 & \textit{Speed No Load Offer Reference Level} (\$/\textit{hr}) \\
 &= (\textit{Speed No Load Heat Consumption} \left(\frac{\textit{GJ}}{\textit{hr}}\right) \times \textit{Total Fuel Related Costs} \left(\frac{\$}{\textit{GJ}}\right) \\
 &\quad \times \textit{Performance Factor}) + \textit{Emission Costs} \left(\frac{\$}{\textit{hr}}\right) \\
 &\quad + \textit{Operating and Maintenance Costs} \left(\frac{\$}{\textit{hr}}\right)
 \end{aligned}$$


---

$$\begin{aligned}
 & \textit{Energy Offer Reference Level} \left(\frac{\$}{\textit{MWh}}\right) \\
 &= (\textit{Incremental Heat Rate} \left(\frac{\textit{GJ}}{\textit{MWh}}\right) \times \textit{Total Fuel Related Costs} \left(\frac{\$}{\textit{GJ}}\right) \\
 &\quad \times \textit{Performance Factor}) + \textit{Emission Costs} \left(\frac{\$}{\textit{MWh}}\right) \\
 &\quad + \textit{Operating and Maintenance Costs} \left(\frac{\$}{\textit{MWh}}\right)
 \end{aligned}$$


---

$$\begin{aligned}
 & \textit{Start – up Offer Reference Level} \left(\frac{\$}{\textit{Start}}\right) \\
 &= \left( \textit{Start Fuel Consumed} \left(\frac{\textit{GJ}}{\textit{start}}\right) \times \textit{Total Fuel Related Cost} \left(\frac{\$}{\textit{GJ}}\right) \right. \\
 &\quad \left. \times \textit{Performance Factor} \right) \\
 &\quad + \left( \textit{Start – up Station Service Quantity} \left(\frac{\textit{MWh}}{\textit{start}}\right) \right. \\
 &\quad \left. \times \textit{Station Service Price} \left(\frac{\$}{\textit{MWh}}\right) \right) + \textit{Start – Up Emissions Costs} \left(\frac{\$}{\textit{start}}\right) \\
 &\quad + \textit{Operating and Maintenance Costs} \left(\frac{\$}{\textit{start}}\right) + \textit{Start} \\
 &\quad - \textit{up Offer Escalation Factor}
 \end{aligned}$$


---

For a *resource* that has a *minimum loading point reference level* that is greater than 0 MW, the *energy offer reference level* for that *resource* must have at least one lamination where the maximum quantity in the lamination equals the *minimum loading point reference level* for the *resource*.

Where a *resource* has duct-firing capability and the *short-run marginal costs* of producing *energy* utilizing the duct-firing capability is higher than the *short-run marginal costs* of producing *energy* when the duct-firing capability is not utilized, the *energy offer reference level* for that *resource* must also have at least one lamination where the maximum quantity in the lamination equals the sum of the maximum active power capability of all *generation units* associated with the *resource* less the duct-firing capability of the *resource*.

The *energy offer reference level* for the *resource* will also have at least one lamination where the maximum quantity in the lamination equals the sum of the maximum active power capability of all *generation units* associated with the *resource*.

### 7.1.3.2. Variant A and Variant B Thermal Resources

Pursuant to **MR Ch. 7, s. 22.4.2**, the *IESO* determines two *energy offer reference levels* for a *resource* that has registered a “start-up cost and speed-no-load eligibility flag” value of “Y” and that has registered a primary fuel type of gas, oil, steam, or biomass.

The *resource’s* primary *energy offer reference level* is calculated as follows:

$$\begin{aligned}
 & \text{Primary Energy Offer Reference Level} \left( \frac{\$}{\text{MWh}} \right) \\
 &= \left( \left[ \text{Incremental Heat Rate} \left( \frac{\text{GJ}}{\text{MWh}} \right) \right. \right. \\
 & \quad \left. \left. + \text{Speed No Load Fuel Consumption}_{\text{MLP-Energy Offers}} \left( \frac{\text{GJ}}{\text{MWh}} \right) \right] \right. \\
 & \quad \left. \times \text{Total Fuel Related Costs} \left( \frac{\$}{\text{GJ}} \right) \times \text{Performance Factor} \right) \\
 & \quad + \text{Emission Costs} \left( \frac{\$}{\text{MWh}} \right) \\
 & \quad + \text{Speed No Load Emission Costs}_{\text{MLP-Energy Offers}} \left( \frac{\$}{\text{MWh}} \right) \\
 & \quad + \text{Operating and Maintenance Costs} \left( \frac{\$}{\text{MWh}} \right) \\
 & \quad + \left[ \frac{\left( \text{Start-up cost} \left( \frac{\$}{\text{start}} \right) \right)}{\text{Hours per start} \left( \frac{\text{h}}{\text{start}} \right) \times \text{MLP}(\text{MW})} \right]
 \end{aligned}$$

The *resource's secondary energy offer reference level* is calculated as follows:

$$\begin{aligned}
 & \text{Secondary Energy Offer Reference Level} \left( \frac{\$}{\text{MWh}} \right) \\
 &= \left( \left[ \text{Incremental Heat Rate} \left( \frac{\text{GJ}}{\text{MWh}} \right) \right. \right. \\
 & \quad \left. \left. + \text{Speed No Load Fuel Consumption}_{\text{MLP-Energy Offers}} \left( \frac{\text{GJ}}{\text{MWh}} \right) \right] \right. \\
 & \quad \left. \times \text{Total Fuel Related Costs} \left( \frac{\$}{\text{GJ}} \right) \times \text{Performance Factor} \right) \\
 & \quad + \text{Emission Costs} \left( \frac{\$}{\text{MWh}} \right) \\
 & \quad + \text{Speed No Load Emission Costs}_{\text{MLP-Energy Offers}} \left( \frac{\$}{\text{MWh}} \right) \\
 & \quad + \text{Operating and Maintenance Costs} \left( \frac{\$}{\text{MWh}} \right)
 \end{aligned}$$

$$\frac{\text{Speed No Load Emission Costs}_{\text{MLP-Energy Offers}} \left( \frac{\$}{\text{MWh}} \right) = \text{No Load Heat Consumption} \left( \frac{\text{GJ}}{\text{hr}} \right) \times \text{Fuel Carbon Content} \left( \frac{\text{tCO}_2\text{e}}{\text{GJ}} \right) \times \text{Carbon Price} \left( \frac{\$}{\text{tCO}_2\text{e}} \right)}{\text{Minimum Loading Point (MW)}}$$

For a *resource* that has a *minimum loading point reference level* that is greater than 0 MW, the *energy offer reference level* for the *resource* will have at least one lamination where the maximum quantity in the lamination equals the *minimum loading point reference level* for the *resource*.

If a *resource* has duct-firing capability and the *short-run marginal costs* of producing *energy* utilizing the duct-firing capability is higher than the *short-run marginal costs* of producing *energy* when the duct-firing capability is not utilized, the *energy offer reference level* for the *resource* will also have at least one lamination where the maximum quantity in the lamination equals the sum of the maximum active power capability of all *generation units* associated with the *resource* less the duct-firing capability of the *resource*.

The *energy offer reference level* for the *resource* will also have at least one lamination where the maximum quantity in the lamination equals the sum of the maximum active power capability of all *generation units* associated with the *resource*.

#### 7.1.4. Incremental Heat Rates

A *market participant* must submit heat rate curves to determine the incremental heat rate. These curves show heat rate in GJ/MWh needed per MWh of net electrical output.

Heat rate (HR) equals the GJ heat input (higher heating value (HHV) basis) divided by the MWh of energy output.

$$\text{Heat Rate} = \text{HR} = \frac{\text{Heat Input (GJ)}}{\text{Net MWh}}$$

Incremental heat rate describes the heat input necessary to produce an additional MWh of output. Mathematically, the incremental heat rate is the first derivative of the heat rate curve.

$$\text{Incremental Heat Rate} = \Delta\text{HR} = \frac{\text{Change in Fuel In}}{\text{Change in Energy Out}} = \left( \frac{d_y}{d_x} \right) \text{Heat Rate}$$

The *market participant* must submit heat rates and incremental heat rates for their physical unit and *pseudo-unit reference levels* for the selected configuration for combined cycle mode and 1x0 configuration for single cycle mode (if applicable).

If the *resource* is also capable of burning more than one type of fuel, the *market participant* must also submit the incremental heat rate for operation of the *resource* for each fuel type. For example, if a *resource* is capable of burning natural gas and diesel, the *market participant* must submit the incremental heat rate for operation of the *resource* on both fuel types along with the incremental heat rate curves for their physical unit and *pseudo-unit reference levels* for the selected configuration for combined cycle mode and for *single cycle mode* (if applicable).

The HHV heat content of the fuel must also be submitted. HHV is the amount of heat released by a specific quantity (initially at 25°C) once it is combusted and the products have returned to a temperature of 25 ° C. The following documentation is accepted to support a requested HHV:

- seller's quote or invoice;
- contract or nominal value based on industry standards; and
- as burned test, in stock test, as received test, or as shipped test.

The following documentation is required to support a requested incremental heat rate:

- heat rate and incremental heat rate curves must be submitted based on the HHV for each fuel type and for each operating mode and be based on design or comparable *resource* data modified by actual *resource* test data;
- reference conditions for the heat rate curves, provided they are listed in OEM and performance tests;
- heat rate and incremental heat rate curves need to show the corresponding heat rate and incremental heat rate from *minimum loading point* up to the maximum capacity of the *resource*; and

- correction curves provided by the OEM for the equipment performance under different ambient conditions.

### 7.1.5. Total Fuel Related Costs

Eligible total fuel-related costs for thermal *resources* are expressed by the following equation:

$$\begin{aligned} \text{Total Fuel Related Costs (\$/GJ)} \\ = (\text{Fuel Commodity Index (\$/GJ)} + \text{Service Price Adder (\$/GJ)}) \times (1 \\ + \text{Compressor Fuel Volume Adder (\%)}) \end{aligned}$$

Fixed charges for transportation equipment (e.g., pipelines, train cars, and barges) are ineligible for inclusion in the calculation when calculating the eligible total fuel-related costs.

Fuel costs must be converted to \$/GJ for consistency.

#### 7.1.5.1. Fuel Commodity Index

A fuel price index is used to determine the commodity price charged by the relevant supplier for the fuel purchased.

The following subsections describe the relevant index that the *IESO* uses to determine *reference levels*. The way that these indices are used is based on the timing of their publication or availability. Timing of publication of the fuel commodity indices and integration into the *reference levels* is determined as part of the consultation process to determine *resource-specific reference levels*.

#### Natural Gas

For natural gas, the applicable NGX Union Dawn Day-Ahead Index price for the gas day in \$US/MMBtu is the acceptable fuel commodity index and the *IESO* will use the values published daily by Intercontinental Exchange. If a value is unavailable, the *IESO* will re-use the last value used by the *IESO*.

A *market participant* may request the *IESO* use either a different fuel index or to use the Dawn hub price to account for distance from the Dawn hub. These modifications will be evaluated on a case-by-case basis.

Where a methodology is supported by relevant documentation and appropriately reflects the relationship between the Dawn (or other) trading hub and the *resource*, it will be eligible for use.



## Residual Fuel Oil

For residual fuel oil, the fuel commodity price is the relevant Platts indices for spot oil and the *IESO* will use the values published daily by Platts. If a value is unavailable, the *IESO* will use the last value used by the *IESO*.

The supporting documentation required is a report showing the Platts indices for the relevant mix of types of sulfur spot oil (New York Harbour) in \$US/bbl.

## Ignition Oil

For ignition oil, the fuel commodity price is the weekly average wholesale (rack) price for Furnace Oil in \$CAD/litre and the *IESO* will use the most recent values as published by Natural Resource Canada (NRCan). If a value is unavailable, the *IESO* will use the last value used by the *IESO*.

The supporting documentation required is a report listing the weekly average wholesale (rack) price for furnace oil (rack) in cents per litre (\$CAD) as published by NRCan for the applicable week of consumption.

## Biomass

For biomass fuel, the fuel commodity price is the contract price with the biomass supplier in \$CAD/tonne. The supporting documentation required are copies of the contracts showing the prices with the suppliers.

### 7.1.5.2. Compressor Fuel Volume Adder

Compressor Fuel Volume Adder is the percentage of fuel consumed by the compressor including volumes for injecting or removing gas from storage. This cost is only eligible for natural gas-fired *resources*.

The following supporting documentation is accepted to support a requested Compressor Fuel Volume Adder:

- copies of transportation, storage and load balancing contracts outlining the requirement to provide fuel to acquire the services; and
- copies of current regulatory approved rate schedules showing the percentage fuel requirements, if applicable.

### 7.1.5.3. Service Price Adder

## Natural Gas

The service price adder for natural gas-fired thermal *resources* (\$CAD/GJ) is added to the fuel price for the additional services related to the commodity charge for

transporting, balancing and storing of natural gas, plus the marketer risk premium as described below:

- pipelines, storage providers, and gas utilities provide various services to deal with imbalances between the quantity of gas purchased and the quantity of gas consumed;
- imbalances created from the difference between the quantity of gas purchased and the quantity of gas consumed can be managed by injecting the excess gas into storage or withdrawing the shortfall in gas from storage. Storage services are provided by service providers to meet this need. The same rationale outlining the need for balancing services applies to the need for storage services; and
- a marketer risk premium may be incurred by end-users purchasing smaller volumes relative to large volume buyers.

A *market participant* must submit to the *IESO* the amount of the service price adder applicable to their *resource*. The value would be set out as \$CAD/GJ.

The following supporting documentation is required to support a requested service price adder:

- copies of the transportation, storage and load balancing contracts outlining the requirement to provide fuel to acquire the services;
- copies of current regulatory approved rated schedules showing the variable commodity charges as applicable; and
- copies of contracts with gas suppliers showing the marketer premium.

### **Residual Fuel Oil**

For residual fuel oil, the eligible costs include an adder paid to the fuel supplier plus the cost of transportation from the point of purchase to the *generation facility*.

The following supporting documentation is required:

- copies of the contracts showing the price adder paid to the fuel supplier; and
- the cost of transportation from the point of purchase to the *generation facility*.

### **Biomass**

For biomass, the value includes the sum of a transportation adder plus the heat adjustment factor priced in \$CAD/tonne.

The transportation adder is the cost required to move the biomass supply from the point of purchase to the *generation facility*.

The heat adjustment factor is calculated and applied to the price to account for differences between the heating value specified in the contract and the heating value of the biomass actually delivered.

The following supporting documentation is required:

- copies of the contracts showing the prices paid for the transportation adder; and
- independent reports showing the heating values that are used to determine the heat adjustment factor.

#### 7.1.5.4. Co-firing

*Resources* that co-fire more than one fuel must take a weighted average of the cost of the fuel (\$), with weights determined on a per GJ basis.

When calculating the total fuel-related costs, fixed charges for transportation equipment, such as pipelines, train cars and barges, are excluded.

#### 7.1.5.5. Performance Factors

Performance factors are the calculated ratio of actual fuel burn to theoretical fuel use (design heat input) and are represented by the following formula:

$$\text{Performance Factor} = \frac{\text{Total Actual Fuel Consumed (GJ)}}{\text{Total Theoretical Fuel Consumed (GJ)}}$$

A *market participant* must submit the calculated performance factors for their *resources* on a seasonal basis (winter and summer). Thermal *resources* may experience some decline in performance during certain seasons or weather conditions, or due to *resource* age or declining efficiency. The *IESO* will update performance factors, similar to other components of *reference levels*, on an as-needed basis.

Acceptable supporting documentation includes the following:

- actual fuel consumed: measured fuel quantities over five years and heat content of fuel in five-minute intervals;
- theoretical fuel consumption based on design information: heat rate and correction curves for each five-minute interval and MWh of production during the same time period for the actual fuel consumed data;
- reference site conditions for theoretical fuel consumption;
- MWh of production during the time period; and
- OEM-defined new and clean period (first x hours of operation).

#### 7.1.6. Emissions Costs

Emissions costs are eligible costs and may be accounted for in the manner described in the following subsections.

## Resources Complying with the Greenhouse Gas Emission Performance Standards

*Resources* that a part of a *generation facility* and have annual emissions that exceed 50,000 tCO<sub>2</sub>e per year or *resources* that have opted in to the [Greenhouse Gas Emission Performance Standards](#) may submit their emissions costs to the *IESO* for review.

The *IESO* will review and update the contributions of emissions cost to an *energy offer reference level* on an as-needed basis based on the applicable emission performance standard and carbon price for each year.

The contribution of eligible emissions costs are calculated using the following formula:

$$\begin{aligned}
 & \text{Emissions Charge} \left( \frac{\$}{\text{MWh}} \right) \\
 &= \left( \text{Incremental HR} \left( \frac{\text{MJ}}{\text{MWh}} \right) \times \text{Performance Factor} \times \text{Emission Factor} \left( \frac{\text{tCO}_2\text{e}}{\text{GJ}} \right) \right. \\
 & \times \frac{1 \text{ GJ}}{1000 \text{ MJ}} - \text{Emission Performance Standard} \left( \frac{\text{tCO}_2\text{e}}{\text{GWh}} \right) \times \left( \frac{1 \text{ GWh}}{1000 \text{ MWh}} \right) \\
 & \left. \times \text{Carbon Price} \left( \frac{\$}{\text{tCO}_2\text{e}} \right) \right)
 \end{aligned}$$

where, tCO<sub>2</sub>e = tonnes of carbon dioxide equivalent.<sup>9</sup>

Emission Factor must be calculated in accordance with Tables 20-1a, 20-2, 20-3, 20-5, or 20-7 in [Ontario's guide for reporting greenhouse gas emissions](#) for section 4(1) of Ontario Regulation 452/09 or other methodology allowed in the guide.

Emission Performance Standard must be calculated in accordance with the applicable value for fossil fuel electricity generation in accordance with [Ontario's Greenhouse Gas Emission Performance Standards \(O. Reg. 241/19\)](#).

### Other Resources

For *resources* that do not qualify for the Emission Performance Standard, eligible emissions costs are based solely on fuel consumption, as reflected by the following formula:

---

<sup>9</sup> A "tonne" is a metric ton, equal to 1,000 kilograms.

$$\begin{aligned}
 \text{Emissions Charge} \left( \frac{\$}{\text{MWh}} \right) &= \text{Incremental HR} \times \text{Performance Factor} \times \text{Emission Factor} \left( \frac{\text{tCO}_2\text{e}}{\text{GJ}} \right) \times \frac{1}{1000} \\
 &\times \text{Carbon Price} \left( \frac{\$}{\text{tCO}_2\text{e}} \right)
 \end{aligned}$$

$$\begin{aligned}
 \text{Emissions Charge} \left( \frac{\$}{\text{MWh}} \right) &= \text{Incremental HR} \times \text{Performance Factor} \times \text{Emission Factor} \left( \frac{\text{tCO}_2\text{e}}{\text{GJ}} \right) \times \frac{1}{1000} \\
 &\times \text{Carbon Price} \left( \frac{\$}{\text{tCO}_2\text{e}} \right)
 \end{aligned}$$


---

### Supporting Documentation

Documentation required to support the inclusion of an emissions cost (required in addition to the supporting documentation submitted for total fuel related costs) in a *reference level* is as follows:

- For *resources* in a *generation facility* that have annual emissions that exceed 50,000 tCO<sub>2</sub>e per year or have opted in to the Greenhouse Gas Emission Performance Standards *resources*:
  - Emission Factor, as defined in [Guide: Greenhouse Gas Emissions Reporting](#). If a *resource* specific Emission Factor is proposed by the *market participant* for the *reference level* as applicable, supporting documentation must be submitted to substantiate the calculation of an average Emission Factor based on quality of fuel received at the *generation facility* for the last five years.
- For other *resources*:
  - Invoices including their emissions charge as justification for emissions charges on a \$/GJ basis.

### 7.1.7. O&M Costs

For thermal *resources*, eligible O&M costs are calculated according to the following formula:

$$\begin{aligned}
 O\&M \text{ Costs} & \left( \frac{\$}{MWh}, \frac{\$}{start}, \frac{\$}{hr} \right) \\
 & = \text{Major Maintenance} \left( \frac{\$}{MWh}, \frac{\$}{start}, \frac{\$}{hr} \right) \\
 & + \text{Scheduled Maintenance Costs} \left( \frac{\$}{MWh}, \frac{\$}{start}, \frac{\$}{hr} \right) \\
 & + \text{Unscheduled Maintenance Costs} \left( \frac{\$}{MWh}, \frac{\$}{start}, \frac{\$}{hr} \right) \\
 & + \text{Operating Consumables Adder} \left( \frac{\$}{MWh}, \frac{\$}{start}, \frac{\$}{hr} \right)
 \end{aligned}$$

$$\begin{aligned}
 O\&M \text{ Costs} & \left( \frac{\$}{MWh}, \frac{\$}{start}, \frac{\$}{hr} \right) \\
 & = \text{Major Maintenance} \left( \frac{\$}{MWh}, \frac{\$}{start}, \frac{\$}{hr} \right) \\
 & + \text{Scheduled Maintenance Costs} \left( \frac{\$}{MWh}, \frac{\$}{start}, \frac{\$}{hr} \right) \\
 & + \text{Unscheduled Maintenance Costs} \left( \frac{\$}{MWh}, \frac{\$}{start}, \frac{\$}{hr} \right) \\
 & + \text{Operating Consumables Adder} \left( \frac{\$}{MWh}, \frac{\$}{start}, \frac{\$}{hr} \right)
 \end{aligned}$$

The default allocation of each eligible O&M costs across these *reference levels* is described in the following section discussing the relevant cost (e.g. planned maintenance, unscheduled maintenance, scheduled maintenance).

A *market participant* may elect to allocate their eligible O&M costs to their *energy offer reference level*, *start-up offer reference level* or *speed no-load offer reference level*. The *market participant* must submit rationale for the allocation of eligible O&M costs across these *reference levels*.

For *resources* that are capable of burning multiple fuels, the *market participant* must submit O&M costs inputs into the *reference levels* for each fuel type.

#### 7.1.7.1. Major Maintenance

Eligible major maintenance costs for thermal *resources* include maintenance related to the gas turbine, steam turbine, heat recovery steam *generation unit*, or steam *generation unit*, where applicable.

Costs reimbursed by insurance and/or warranty under construction or equipment supply contracts are ineligible.

Eligible costs are determined on the basis of timing that covers one major maintenance inspection cycle. The duration of these inspection cycles varies according to the component or service. These durations take the place of the historical study period described above. The contribution of each major maintenance cost to the relevant *reference level* is determined according to the formula for pro-rating these costs provided in the following sections (either on an equivalent operating hour (EOH)-basis or on a per-start basis).

If such historical information is not available, a *market participant* may submit forecasted major maintenance expenditures based on costs associated with eligible maintenance activities in accordance with the OEM recommended maintenance intervals or prudent industry practices.

The *market participant* must submit sufficient supporting documentation for the forecasts in accordance with [section 3.2](#).

### OEM-Recommended Interval on EOH or Operating Hour (h) Basis

For all major maintenance with maintenance intervals on an hours (h) or EOH-basis (e.g., 25,000-hour gas turbine inspection interval), the default cost allocation by *offer* type is as follows:

$$\text{Major Maintenance} \left( \frac{\$}{MWh} \right) = \sum_i \frac{\text{Maintenance Cost}_i (\$)}{\text{Output}_i (MW) \times \text{Maintenance Interval}_i (h, EOH)}$$

$$\begin{aligned} \text{Major Maintenance} \left( \frac{\$}{\text{start}} \right) &= \sum_i \text{Maintenance Cost}_i (\$) \\ &\times \frac{\text{Hours Per Start}_i \left( \frac{h}{\text{start}} \right) \text{ or Equivalent Operating Hours Per Start} \left( \frac{EOH}{\text{Start}} \right)}{\text{Maintenance Interval}_i (h, EOH)} \end{aligned}$$

$$\text{Major Maintenance} \left( \frac{\$}{h} \right) = \sum_i \frac{\text{Maintenance Cost}_i (\$)}{\text{Maintenance Interval}_i (h, EOH)}$$

The EOH basis may only be used where the OEM provides a recommendation that includes additional weight for each start to calculate an equivalent life to factor in the impact of operating hours and starts on the equipment.

### OEM-Recommended Interval on Per-Start Basis

For all eligible major maintenance costs with maintenance intervals on a start basis (e.g. every 2,400 starts), the default cost allocation may be proposed by the *market participant* as follows:

$$\begin{aligned} \text{Major Maintenance} \left( \frac{\$}{MWh} \right) &= \sum_i \frac{\text{Maintenance Cost}_i (\$) \times (\text{Applicable portion of the start cost})}{\text{Output}(MW) \times \text{Hours Per Start} \left( \frac{h}{\text{Start}} \right) \times \text{Maintenance Interval}_i(\text{start})} \end{aligned}$$

$$\begin{aligned} \text{Major Maintenance} \left( \frac{\$}{\text{start}} \right) &= \sum_i \frac{\text{Maintenance Cost}_i (\$) \times (1 \text{ start or applicable portion of the start cost})}{\text{Maintenance Interval}_i(\text{starts})} \end{aligned}$$

$$\text{Major Maintenance} \left( \frac{\$}{h} \right) = \text{Not applicable}$$

### Gas Turbines

For combustion turbines, either as a standalone *resource* or as part of a combined cycle installation, eligible major maintenance costs include costs for inspections in accordance with the planned maintenance recommendations provided by the OEM including:

- combustion inspection;
- hot gas path inspection;
- major inspection; and
- rotor inspection.

Eligible costs for the above include:

- incremental payments made under a maintenance service agreement. All or a portion of the incremental amounts may be eligible based on the terms of the relevant contracts based on eligible activities;
- replacement or refurbishment of capital parts for the gas turbine or gas turbine *generation unit* consistent with OEM recommendations and prudent industry practice;
- miscellaneous hardware or parts that are normally replaced during a gas turbine inspection;



- *generation unit* inspections;
- consumables required for the outage;
- technical advisors required;
- temporary incremental labour required;
- crane rentals required; and
- temporary infrastructure required (scaffolding, temporary office trailers, washrooms, etc.)

The supporting documentation required from a *market participant* is described in [section 3.2](#).

### **Combined Cycle Steam Resources and Fossil or Biomass Steam Resources**

For steam *resources* in a combined cycle *facility* and fossil biomass steam *resources*, the inspections on the heat recovery steam *generation unit* and steam turbine attributed to incremental electricity production are eligible costs where they are consistent with recommendations from the OEMs, which include:

- minor inspection; and
- major inspection.

Eligible costs for the above include:

- turbine blade repair or replacement;
- turbine diaphragm repair;
- casing repair or replacement;
- bearing repair or refurbishment;
- *generation unit* inspection;
- boiler repairs;
- primary air fan repairs;
- stop valve inspection and repairs;
- throttle valve inspection and repairs;
- nozzle block inspection and repairs;
- intercept valve inspection and repairs;
- PA/ID/FD Fan repairs;
- consumables required for the outage;
- technical advisors required;
- temporary incremental labour required;

- crane rentals required; and
- temporary infrastructure required (scaffolding, temporary office trailers, washrooms, etc.)

The supporting documentation required from a *market participant* is described in [section 3.2](#).

#### **7.1.7.2. Scheduled Maintenance Costs**

Eligible scheduled maintenance costs for thermal *resources* include routine maintenance tasks on balance of plant equipment for combined cycle *generation facilities* and fossil or biomass steam *resources*.

Eligible costs include routine inspections as per the following, where applicable:

- inspection and rebuild of fan motors for the air-cooled condenser;
- heat transfer unit cleaning (air cooler, air heaters, economizers);
- selective catalytic reduction and CO reduction catalyst replacement;
- precipitator repairs;
- membrane replacements;
- reverse osmosis cartridges replacement;
- condensate extraction pumps overhauls;
- boiler feedwater pumps overhauls;
- bypass systems and/or sky vents inspections and parts replacements;
- condenser cooling water pumps overhaul;
- gas compressor inspection and overhaul;
- auxiliary boilers inspection;
- bucket elevator plant repairs;
- cooling tower fan motor and gearbox inspection;
- cooling tower fill and drift eliminators replacement; and
- biomass material handling systems including pulverizer maintenance

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for scheduled maintenance costs for thermal *resources* is five years.

#### **7.1.7.3. Unscheduled Maintenance Costs**

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for unscheduled maintenance costs for thermal *resources* is five years.

#### 7.1.7.4. Operating Consumables Cost Adder

Eligible operating consumable costs for thermal *resources* are non-labour cost components which account for material and consumable costs and fees incurred as a result of electrical power production. Costs must be incremental and avoidable to be eligible to contribute to the relevant *reference level*.

Eligible costs include:

- make-up water for the steam cycle (combined cycle steam *resources* and fossil or biomass steam *resources* only);
- steam cycle chemicals (combined cycle steam *resources* and fossil or biomass steam *resources* only);
- lubrication oil; and
- reagents for emission abatement equipment (e.g. ammonia or urea), if applicable.

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for the operating consumable cost adder for thermal *resources* is **five** years.

Eligible operating consumables may be calculated by either of the following methods depending on whether the *market participant* allocates these costs to the *energy offer reference level* or the *start-up offer reference level*:

#### Allocating Operating Consumables Cost Adder to Energy Offer Reference Level

The eligible costs per year in the historical study period are divided by the generation per year for each year of the historical study period. The average across all years in the historical study period is the eligible operating consumables cost adder to the *energy offer reference level*. Where a *market participant* allocates operating consumables costs on the basis of starts, these costs are not eligible to be considered in the *energy offer reference level*.

$$\text{Operating Consumables Cost Adder} \left( \frac{\$}{\text{MWh}} \right) = \frac{\text{Historical Operating Consumables Cost} (\$)}{\text{Historical Electricity Generation (MWh)}}$$

#### Allocating Operating Consumables Cost Adder to Start-Up Offer Reference Level

A *market participant* may elect to allocate a portion of their operating consumable cost based on the ratio that they typically incur operating consumables during operations. If they typically incur 10% of their operating consumables costs during starts, then 10% of their operating consumables costs are eligible to be allocated on the basis of starts within the historical study period.

$$\text{Operating Consumables Cost Adder} \left( \frac{\$}{\text{Start}} \right) = \frac{\text{Historical Operating Consumables Cost Related to Starts} (\$)}{\text{Historical Number of Starts} (\text{Starts})}$$

### 7.1.8. Costs Related to Start-Up Offers

Eligible costs related to *start-up offers* for thermal *resources* are all costs associated with start-up. These include costs required to bring the boiler, turbine, and *generation unit* from shutdown conditions to the *MLP* of the *resource*.

Start-up costs for thermal *resources* will vary according to the *thermal state* of the *resource* where appropriate, resulting in *reference level* contributions that vary according to *thermal state*.

$$\begin{aligned} \text{Start - up Cost} \left( \frac{\$}{\text{Start}} \right) &= \left( \text{Start - up Fuel Consumed} \left( \frac{\text{GJ}}{\text{start}} \right) \times \text{Total Fuel Related Cost} \left( \frac{\$}{\text{GJ}} \right) \times \text{Performance Factor} \right) \\ &+ \left( \text{Station Service Quantity} \left( \frac{\text{MWh}}{\text{start}} \right) \times \text{Station Service Rate} \left( \frac{\$}{\text{MWh}} \right) \right) + \text{Start} \\ &- \text{up Emissions Costs} \left( \frac{\$}{\text{Start}} \right) + \text{Start - up Maintenance Adder} \left( \frac{\$}{\text{start}} \right) + \text{Start} \\ &- \text{up Operating Consumables Adder} \left( \frac{\$}{\text{start}} \right) \end{aligned}$$

#### 7.1.8.1. Start-Up Fuel Consumed

Start-up fuel consumed for thermal *resources* is the quantity of start fuel consumed from the first firing up of the *resource* until its *MLP*. This value can vary depending on how long the *resource* has been offline or the *thermal state* of the *resource*. Thermal *resources* must submit start-up fuel quantities for starting up from a cold, warm and hot state. The *IESO* sets *reference levels* for each *thermal state*. If multiple types of fuel are required for a *resource* to start up, the *market participant* must identify the required quantities for each type of fuel required for the start per *thermal state*.

#### 7.1.8.2. Station Service Quantity

The station service quantity is the incremental quantity of electricity withdrawals from the *delivery point* included from the initiation of the start sequence of a *resource* until the *resource* reaches its *MLP*.

The incremental quantity of electricity withdrawals is multiplied by the station service rate to determine the cost of station service.

### 7.1.8.3. Station Service Rate

For a *resource* with an electric auxiliary boiler, the incremental station service cost associated with operating the auxiliary boiler may be included with the station service. This incremental station service cost is determined based on the incremental electricity withdrawals above an average baseline consumption of the *resource* when it is not generating electricity.

A *resource* that pays the *LMP* for station service must use the 12-month average-*LMP* at the *resource* as the station service rate.

*Resources* that have fewer than 12 months of historical *LMPs* on record must use the Ontario Energy Board's Regulated Price Plan Price Reports for the relevant historical study period to determine the station service rate, as described below:

- for *resources* that participate in the generation station service rebate program, the station service rate is the commodity cost plus the variance line item from the RPP Price Report; and
- for *resources* that do not participate in the generation station service rebate program, the station service rate is the commodity cost, plus the global adjustment, plus the variance line item from the RPP Price Report.

### 7.1.8.4. Start-Up Emissions Costs

Eligible start-up emissions costs for thermal *resources* are the costs based on relevant emissions policy such as the Federal Carbon Pricing Backstop.

$$\begin{aligned}
 & \text{Emissions Charge} \left( \frac{\$}{\text{Start}} \right) \\
 &= \left( \text{Start Fuel Consumed} \left( \frac{\text{GJ}}{\text{Start}} \right) \times \text{Fuel Carbon Content} \left( \frac{\text{tCO}_2\text{e}}{\text{GJ}} \right) \right. \\
 & \quad \left. - \text{Output Based Standard} \left( \frac{\text{tCO}_2\text{e}}{\text{GWh}} \right) \right) \\
 & \quad \times \text{Electricity Generated During Start} \left( \frac{\text{GWh}}{\text{Start}} \right) \times \text{Carbon Price} \left( \frac{\$}{\text{tCO}_2\text{e}} \right)
 \end{aligned}$$

For the *IESO* to calculate the Emissions Charge for each type of start (hot, warm and cold), a *market participant* must submit supporting documentation that demonstrates the electricity generated from the initiation of the start up until the *resource* reaches its *MLP*.

When thermal *resources* burn biomass fuels during start-up, there are no resultant eligible start-up emissions costs.

### 7.1.8.5. Start-Up Maintenance Adder

A *market participant* may include a start-up maintenance adder in the start-up costs using the methodology prescribed in [section 7.1.7](#).

### 7.1.8.6. Start-Up Operating Consumables Adder

A start-up operating consumables adder is eligible to be included in the start-up costs using the methodology prescribed in Operating Consumables Adder subsection of [section 7.1.7](#).

### 7.1.8.7. Start-up Offer Escalation Factor

The start-up offer escalation factor is calculated by the *IESO* for each *dispatch hour*. It is added to the *reference level value* for the *start-up offer reference level* for each *dispatch hour* so that the commitment costs of a *resource* are appropriately accounted for in *reference level values* used for the end of a *dispatch day*.

The start-up offer escalation factor for a *dispatch hour* is calculated as follows:

Start-up Offer Escalation Factor =

$$\text{Max} (0, \text{'MGBRT NFRL'} - (24 - (\text{'dispatch hour'} - 1))) \times ((\text{'MLP NFRL'} \times \text{'EO MLP RL'}) + \text{'SNL RL'})$$

Where

- 'dispatch hour' is the numeric value of the *dispatch hour* between 1 and 24
- 'MGBRT NFRL' is the *minimum generation block run-time reference level*.
- 'MLP NFRL' is the *minimum loading point reference level*.
- 'EO MLP RL' is the price of the 2<sup>nd</sup> lamination of the *energy offer reference level value* for the *dispatch hour*.
- 'SNL RL' is the *reference level value* for the *speed-no-load offer reference level* for the *dispatch hour*.

### 7.1.9. Speed-No Load Cost

This *reference level* methodology uses the approach of separating the fixed hourly costs of synchronized operation from costs associated with incremental production. It is calculated as follows:

$$\begin{aligned} \text{Speed No Load Costs} \left( \frac{\$}{\text{hr}} \right) &= \text{Fuel Price} \left( \frac{\$}{\text{GJ}} \right) \times \text{Speed No Load Heat Consumption} \left( \frac{\text{GJ}}{\text{hr}} \right) \\ &+ \text{Speed No Load Emission Costs} \left( \frac{\$}{\text{hr}} \right) \end{aligned}$$

#### 7.1.9.1. Speed-No Load Heat Consumption

Speed no-load heat consumption is the minimum fuel burn that would be hypothetically consumed if the *resource* were to back down to a zero-power output while staying synchronized with the IESO-controlled grid.

This quantity should be determined by a *market participant* based on a regression analysis of the heat input as a function of net power output of the *resource*. The data for the regression analysis may be derived from test data or design information of the *resource*.

#### 7.1.9.2. Speed No-Load Emission Costs

Eligible speed no-load emission costs are the costs associated with emissions based on the relevant emissions policy such as the Federal Carbon Pricing Backstop.

$$\begin{aligned} \text{Emissions Charge} \left( \frac{\$}{\text{hr}} \right) &= \text{No load heat consumption (GJ/hr)} \times \text{Fuel Carbon Content} \left( \frac{\text{tCO}_2\text{e}}{\text{GJ}} \right) \\ &\times \text{Carbon Price} \left( \frac{\$}{\text{tCO}_2\text{e}} \right) \end{aligned}$$

Speed no-load emissions costs do not apply when *resources* are firing biomass fuel.

For thermal *resources* that have two *energy offer reference levels* determined pursuant to **MR Ch. 7, s. 22.4.2**, the following emission charges may be included in those *energy offer reference levels*:

$$\text{Speed No Load Emission Costs}_{MLP-Energy} \left( \frac{\$}{MWh} \right) = \frac{\text{No load heat consumption} \left( \frac{GJ}{hr} \right) \times \text{Fuel Carbon Content} \left( \frac{tCO_2e}{GJ} \right) \times \text{Carbon Price} \left( \frac{\$}{tCO_2e} \right)}{\text{Minimum Loading Point (MW)}}$$

### 7.1.10. Operating Reserve Offer Reference levels

*Operating reserve offer reference levels* are approved based on incremental costs incurred by the *resource* to make the *operating reserve* capability available. These are the costs incurred by a *resource* at the time it is supplying *operating reserve*. These costs are not incurred when the *resource* is not providing *operating reserve*. If applicable, a *market participant* must demonstrate the costs associated with the provision of *operating reserve* on a *resource*-specific basis with relevant supporting documentation. No incremental costs are associated with operating and maintaining the equipment for providing *operating reserve*.

## 7.2. Hydroelectric

For the purposes of establishing *reference levels*, hydroelectric *resources* are considered to be *resources* that produce electricity by using the power of flowing water. Hydroelectric *resources* have both an *energy offer reference level* and an *operating reserve offer reference level*.

This section describes how a *market participant* must submit the inputs for the applicable form to facilitate the calculation of each relevant *reference level*.



For hydroelectric *resources*, the *IESO* applies the following equation for the *energy offer reference level* and the components are described in subsequent sections.

$$\begin{aligned} & \textit{Energy Reference Level} \\ & = \textit{MAX} \left( \textit{Total Fuel Related Costs} \left( \frac{\$}{\textit{MWh}} \right) \right. \\ & \quad + \left( \textit{Major Maintenance} \left( \frac{\$}{\textit{MWh}} \right) + \textit{Scheduled Maintenance} \left( \frac{\$}{\textit{MWh}} \right) \right. \\ & \quad \left. \left. + \textit{Unscheduled Maintenance} \left( \frac{\$}{\textit{MWh}} \right) \right) \right. \\ & \quad \left. \times \textit{EOH Factor, Opportunity Costs} \left( \frac{\$}{\textit{MWh}} \right) \right) \end{aligned}$$

### 7.2.1. Total Fuel-Related Costs

The total fuel-related costs for hydroelectric *resources* includes the gross revenue charges and the pumped hydroelectric fuel costs.

#### 7.2.1.1. Gross Revenue Charges

Hydroelectric *resource* owners pay taxes and charges based on gross revenue on a \$/MWh basis. These taxes and charges are known as the gross revenue charges (GRC). GRC is an eligible fuel-related cost for hydroelectric *resources*.

Examples of GRC components include:

- property taxes payable to the Minister of Finance;
- property taxes payable to the Ontario Electricity Financial Corporation;
- water rental charges payable to the Minister of Finance;
- charges from the Niagara Parks Commission; and
- charges from the Province of Quebec.

Supporting documentation for the GRC include invoices issued by the relevant authority.

The following equation specifies the contribution of GRC to the *energy offer reference level*:

$$\text{Marginal Gross Revenue Charge} = \frac{\text{Property Tax Charge (\$)} + \text{Water Rental Charge (\$)}}{\text{Long Term Average Energy (MWh)}}$$

Where:

- Property Tax Charge is calculated from the marginal tax rate, the water rental charge and the long term average *energy*.
- Long Term Average Energy is the annual *energy* which is expected to be produced during the average hydrological year, also known as the P50 Energy generation.
- The Long Term Average Energy should be calculated using at least 10 years of actual generation records, or calculated via an hourly simulation model with at least 10 years of hydrological records.

### 7.2.1.2. Pumped Hydroelectric Fuel Cost

Pumped-storage hydropower is a type of hydroelectric *energy* storage. It is configured with two reservoirs at different elevations that generate power as water moves past a turbine at the lower elevation. The water from the lower reservoir is pumped up into the higher reservoir to refill it for power generation later.

For hydroelectric *resources* that are configured in this way that are not registered as part of an *electricity storage facility*, the cost of *energy* necessary to pump water from the lower reservoir and move it up to the upper reservoir is an eligible cost for the *energy offer reference level*.

For hydroelectric *resources* that are configured in this way that are registered as an *energy~~electricity~~ storage facility*, please refer to Section 7.6 on *reference levels for financial dispatch data parameters* pertaining to *energy~~electricity~~ storage resources*.

The IESO calculates the pumping power cost on a seven-day rolling average basis by multiplying the costs to withdraw power by the power consumed during each hour, divided by the total power consumed over the seven-day period (168 hours) to determine the average cost, as described below:

$$\begin{aligned} \text{Pumping Power Cost} & \left( \frac{\$}{\text{MWh}} \right) \\ & = \frac{\sum_{168} \left( \text{Pumping Withdrawal Costs}_h \left( \frac{\$}{\text{MWh}} \right) \times \text{Pumping Power}_h (\text{MWh}) \right)}{\sum_{168} \text{Pumping Power}_h (\text{MWh})} \end{aligned}$$

The Pumping Withdrawal Costs include the *real-time LMP* paid for pumping withdrawals plus a fixed \$/MWh adder for related *energy* regulatory charges incurred during withdrawal operations.

If no water has been pumped during the previous seven-day period, the *IESO* uses the last non-zero value for pumping power cost calculated for the hydroelectric *resource*.

The pumped storage fuel cost is calculated by dividing the pumping power cost by the pumping efficiency, as described below:

$$\text{Pumped Storage Fuel Cost} \left( \frac{\$}{\text{MWh}} \right) = \frac{\text{Pumping Power Cost} \left( \frac{\$}{\text{MWh}} \right)}{\text{Pumping Efficiency} (\%)}$$

Pumping efficiency is measured using the ratio of generation produced to the amount of generation used as fuel. It is calculated as the generation produced in MWh over the *energy* consumed to pump that MWh of generation produced. This component is applicable to pumped storage hydroelectric generation *resources* only.

$$\text{Pumping Efficiency} = \frac{\text{Generation Produced (MWh)}}{\text{Pumping Energy Consumed (MWh)}}$$

Supporting documentation for this cost is the calculation of pumping efficiency by the *market participant*, using the *resource's revenue meter* data to determine the generation produced in MWh. A *market participant* may also calculate and submit seasonal pumping efficiencies for the *resource* to the *IESO*.

### 7.2.2. O&M Costs

Eligible maintenance costs included in the *reference levels* must be related to expenses incurred as a result of *energy* production and considered variable costs that are directly attributable to the production of *energy*. Costs must be incremental and avoidable to be considered eligible for the *reference level* determination for the *resource*.

Costs that do not vary due to increased electricity production are considered ineligible. Examples of ineligible costs include, but are not limited to:

- building maintenance;
- roads, DAMs and DAM safety;
- hydroelectric-mechanical equipment;
- penstocks and water conveyance systems;
- HVAC systems;

- service air and water systems;
- water treatment; and
- drainage and dewatering.

### 7.2.2.1. Major Maintenance Costs

Eligible major maintenance costs for hydroelectric *resources* include:

- turbine refurbishment;
- runner blade repair;
- turbine/*generation unit* bearing refurbishment or replacement;
- wear ring replacement;
- *generation unit* rewinds;
- stator core refurbishment/replacement;
- rotor pole rewinding;
- governor/HPU refurbishment;
- transformer oil filtration/replacement; and
- transformer replacement.

Costs reimbursed by insurance and/or not directly incurred by the *market participant* due to warranty of the *resource* or any sub-component under construction or equipment supply contracts are excluded.

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for major maintenance costs for hydroelectric *resources* is 40 years.

### 7.2.2.2. Scheduled Maintenance Costs

Eligible scheduled maintenance costs for hydroelectric *resources* include:

- oil and lubricant replacement;
- filter replacements;
- feedwater piping repair;
- water treatment plant service
- mechanical seal replacement; and
- consumable materials for the maintenance of turbine/*generation unit* components.

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for scheduled maintenance costs for hydroelectric *resources* is five years.

### 7.2.2.3. Unscheduled Maintenance Costs

[Section 6.3](#) describes the eligible unscheduled maintenance costs that may be included in the *reference level* calculations. The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for unscheduled maintenance costs for hydroelectric *resources* is five years.

### 7.2.3. Modifying Historical Eligible Maintenance Costs to Account for Changing Operational Profiles

The contributions of the eligible maintenance costs described above (major maintenance, scheduled maintenance, unscheduled maintenance) to the *energy offer reference level* are derived based on the historical operation of the unit.

There might be changes in how a *resource* was *dispatched* in the most recent year of operation, which is referred to as the current operating period, compared to how a *resource* was *dispatched* in the historical study period. To account for these changes, a *market participant* may elect to apply a correction factor to eligible historical maintenance costs based on the equivalent operating hours (EOHs) methodology. This correction factor is applied to improve how accurately the *energy offer reference level* reflects historical eligible costs under the current operating period of a hydroelectric *resource*.

The EOH should be calculated for the relevant historical study period according to the type of maintenance cost as discussed above. If fundamental attributes of the *resource* have significantly changed due to upgrades or modifications, the baseline EOH will be determined on a *resource*-specific basis. To determine the baseline EOH of the *resource*, only those years in the historical study period are used in which the *resource* had fundamental attributes that are consistent with the current attributes of the *resource*. The EOH should also be calculated for the last year of operation (the current operating period).

The ratio of the EOH from the historical study period to the EOH from the current operating period is the correction factor. The correction factor is used to index eligible maintenance costs from all maintenance cost categories (major maintenance, scheduled maintenance and unscheduled maintenance).

The value of EOH for a given year is calculated using the following equation:

$$\begin{aligned} & \text{Equivalent Operating Hours (EOH)} \\ & = \text{Hours of Operation (h)} + (\# \text{ of starts/stops} \times \text{start/stop equivalent hours}) \end{aligned}$$

Where:

- hours of operation are the total number of hours the unit is used for generating electricity;
- # of start/stops are the total number of start/stop cycles of the unit; and
- start/stop equivalent hours are the number of hours of operation associated with each start/stop. A *market participant* must state their assumptions and submit supporting documentation for this value, which may include research studies in determining EOH start/stop hours.

The following case study illustrates example calculations for the EOH multiplier.

**Table 7-1: Example of EOH Methodology Illustrative**

Parameter	Historical Annual Operation (last 5 years)	Current Operating Period (last year)
Hours of operation	5000 h	5000 h
# of start/stops	100	300
Start/stop equivalent hours	5 hours per start/stop	5 hours per start/stop

Historical EOH is calculated as:

$$\text{Equivalent Operating Hours (EOH)} = 5000h + (100 \times 5h) = 5,500h$$

And current operating regime EOH is calculated as:

$$\text{Equivalent Operating Hours (EOH)} = 5000h + (300 \times 5h) = 6,500h$$

Therefore, the appropriate correction factor is calculated as:

$$6,500/5,500 = 1.18$$

#### 7.2.4. Operating Reserve Offer Reference Levels

*Operating reserve offer reference levels* are approved based on incremental costs incurred by the *resource* to make the *operating reserve* capability available.

No incremental costs are associated with operating and maintaining the equipment for providing *operating reserve*.

### 7.2.5. Energy Offer Reference Levels for Hydroelectric Resources that are Part of Cascade Groups

*Energy offer reference levels of resources that are part of a cascade group account for the operational interdependencies of the resources in the cascade group.*

*A market participant must provide the information described below when requesting reference levels. This information enables the IESO to identify the appropriate resources. The IESO uses this information to determine reference levels for these resources as described below.*

*For resources that are part of a cascade group, a market participant is only required to register energy offer reference levels for resources that are located at the top of the cascade group.*

#### 7.2.5.1. Registering Energy Offer Reference Levels for Hydroelectric Resources that are Part of Cascade Groups

*A market participant must register the following information for eligible resources:*

- position of the resource in the forebays within the cascade group;*
- shared The sequence of the forebays; and*
- identification of the order of resource position in within the cascade group, and*
- The resources within each forebay.*

*Refer to MM1.5 for more details on the registration process for cascade groups.*

#### 7.2.5.2. Calculating Energy Offer Reference Levels for Hydroelectric Resources that are Part of Cascade Group

*The IESO calculates reference level values for eligible resources that have submitted the required registered information in a manner to ensure that they increase in price from the top of the cascade group to the bottom of the cascade group. Resources at the top of the cascade group will have the lowest reference level values and resources at the bottom of the cascade group will have the highest reference level values.*

*The IESO carries out the following steps to determine reference level values for resources in a cascade group:*

- Calculate energy offer reference level values for resources that share the forebay at the top of the cascade group as per the relevant registered reference level for the resources.*
- Cap the energy offer reference level values for each resource that shares the forebay at the top of the cascade group to a maximum of \$1999/MWh.*

3. Calculate the *reference level values* for *resources* at the *forebay* that is downstream of the *forebay* from 1 by selecting the highest value of the *reference level* from 1 and adding a \$/MWh adder to that *reference level value*.
4. For *cascade groups* with more than 2 *forebays*, repeat step 3 using *reference level values* from the *resources* at the *forebay* immediately upstream of the relevant *forebay* as the *reference level value* input until all *reference level values* have been calculated.

For example, assume a cascade group exists where Resources A and B share a *forebay* at the top of the *cascade group*, Resources C and D share a *forebay* in the middle of the cascade and Resources E and F share a *forebay* at the bottom of the *cascade group*.

In this example, the *IESO* calculates the *energy offer reference level values* for Resources A and B in a manner consistent with the registered *reference levels* for Resources A and B.

To determine the *energy offer reference level values* for Resources C and D, the *IESO* adds a \$/MWh adder to the maximum of Resource A’s and Resource B’s *energy offer reference level values*.

The adder, represented as (\$X and \$Y) in this example, is a value that ensures that *resources* at the top of the *cascade group* will appear to be less expensive to the relevant calculation engine than *resources* at the downstream *forebays*.

The *IESO* follows a similar process to determine the *energy offer reference level values* for Resources E and F, ensuring that *resources* at *cascade group* position 3 will appear to be the most expensive *resources* of any in the *cascade group* to the relevant calculation engine.

**Table 7-2: Example of Cascade Group Hydroelectric Resource Reference Level Value Methodology**

Cascade Position	Resource	Reference Level Value
1	A	\$100
1	B	\$95
2	C	\$100 + \$X
2	D	\$100 + \$X
3	E	\$100 + \$X + \$Y



Cascade Position	Resource	Reference Level Value
3	F	\$100 + \$X + \$Y

### 7.3. Solar

For the purposes of setting *reference levels*, solar *resources* are considered to be *resources* that use photovoltaic cells to convert solar radiation to electricity.

This section describes the inputs that a *market participant* must submit to request an *energy offer reference level*.

For solar *resources*, the following equation for *energy offer reference level* is applied and the components are described in subsequent subsections:

$$\text{Energy Offer Reference Level} = \text{Operating and Maintenance Costs}$$

#### 7.3.1. O&M Costs

This section describes the eligible maintenance costs for solar *resources* that may be included into the *reference levels*.

##### 7.3.1.1. Major maintenance Costs

Eligible major maintenance costs for solar *resources* include costs to replace inverter units. Costs reimbursed by insurance and/or warranty are excluded.

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for major maintenance costs for solar *resources* is 10 years.

For new solar installations, the statistical *energy* output given in a P50 *resource* assessment may be used when historical injection data is not available.

##### 7.3.1.2. Scheduled Maintenance – Electrical and Mechanical

Eligible scheduled maintenance costs for solar *resources* include:

- inverter annual maintenance;
- combiner box inspections;
- standard cleaning of electronics; and
- racking bolt torque checking.

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for scheduled maintenance costs for solar *resources* is five years.

### 7.3.1.3. Unscheduled Maintenance Costs – Electrical

Eligible unscheduled maintenance costs for solar *resources* include overtime labour or third-party labour contracted to repair the components and the materials costs associated with any such repairs in the event of equipment failure.

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for unscheduled maintenance costs for solar *resources* is five years.

### 7.3.1.4. Incremental Third-Party Payments

[Section 6.3](#) describes eligible incremental third-party payments that must be included in the calculation of the *reference levels* for solar *resources*.

## 7.4. Wind

For the purposes of setting *reference levels*, a wind *resource* is considered to be a *resource* that converts the kinetic *energy* of the wind into electric power through a wind turbine. The wind turbine produces electricity by collecting and transforming wind power into rotational mechanical *energy* to drive a *generating unit*.

For wind *resources*, the *IESO* applies the following equation to determine the *energy offer reference level*. The components are described in subsequent subsections.

$$\text{Energy Offer Reference Level} = \text{Operating and Maintenance Costs}$$

### 7.4.1. O&M Costs

The following subsections list the eligible major, scheduled and unscheduled maintenance costs that may be included in the *reference level* calculations for wind *resources*.

#### 7.4.1.1. Major Maintenance Costs

Eligible major maintenance costs for wind *resources* include:

- blade (blade structure, complete blade, lightning protection system, LEP coating);
- pitch system (bearing change, hydraulics);
- drive train (main shaft / bearing changeout);
- gearbox (bearing change, complete gearbox change); and
- *generation unit* (bearing change, complete *generation unit* changeout).

Costs reimbursed by insurance or warranty under construction or equipment supply contracts are excluded.

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for major maintenance costs for wind *resources* is 10 years.

For new wind installations, the statistical *energy* output given in a P50 *resource* assessment may be used when historical injection data is not available.

#### **7.4.1.2. Scheduled Maintenance Costs**

Eligible scheduled maintenance costs for wind *resources* include:

- converter and main cabinets checks;
- power cables – stator and rotor check;
- bus bar and power cables inspection;
- *generation unit* and gearbox inspections and monitoring program;
- yaw and pitch system inspection;
- lubrication and oil changes;
- bearing inspection and lubrication;
- bearing sealing inspection and insulation test;
- stator winding inspection;
- cooling circuit and heat exchanger inspection;
- blade heating inspection;
- standard cleaning;
- vibration check (*generation unit* frame, bearing housing);
- bolt torque tightening;
- shaft alignment check; and
- blade inspection and minor repair.

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for scheduled maintenance costs for wind *resources* is five years.

#### **7.4.1.3. Unscheduled Maintenance Costs**

Eligible unscheduled maintenance costs for solar *resources* include overtime labour or third-party labour contracted to repair the components and materials costs associated with any such repairs in the event of equipment failure.

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for unscheduled maintenance costs for wind *resources* is five years.

#### **7.4.1.4. Incremental Third-Party Payments**

[Section 6.3.4](#) describes the eligible incremental third-party payments that may be included in the *reference level* calculations for wind *resources*.

#### **7.4.1.5. Operational Costs Related to Start-Up**

Eligible operational costs related to start-up include costs to consume *energy* to warm up the *resource* to enable it to respond to *dispatch instructions*. Examples of wind *resources* that are expected to incur these costs include those with cold climate packages or blade heating.

The cost of power is eligible to be included in the *energy offer reference level* on a \$/MWh basis based on the total cost of starting the unit divided by *energy* production across the historical study period.

Unit SCADA data must be submitted as supporting documentation to show warm-up stage consumption, and hence cost. The supporting documentation required from a *market participant* is described in [section 3.2](#).

The historical study period for operational costs related to start-up for wind *resources* is one year.

## **7.5. Nuclear**

For the purposes of establishing *reference levels*, a nuclear *resource* is considered to be a *resource* that is licensed to produce commercial power from controlled nuclear reactions to heat water to produce steam that drives a steam turbines *generation unit*.

Nuclear *resources* have an *energy offer reference level*. This section describes the inputs for the applicable form that a *market participant* should complete to request an *energy offer reference level*.

For nuclear *resources*, the *IESO* applies the following equation for the *energy offer reference level* and the components are described in subsequent subsections.

$$\begin{aligned}
 & \text{Energy Offer Reference level} \left( \frac{\$}{\text{MWh}} \right) \\
 &= \text{Incremental Fuel Consumption} \left( \frac{\text{kg} (U)}{\text{MWh}} \right) \\
 &\times \left( \text{Total Fuel Related Costs} \left( \frac{\$}{\text{kg} (U)} \right) \times \text{Performance Factor} \right) \\
 &+ \text{Maintenance Costs} \left( \frac{\$}{\text{MWh}} \right) + \text{Operating Costs} \left( \frac{\$}{\text{MWh}} \right) \\
 &+ \text{Incremental Third Party Payments} \left( \frac{\$}{\text{MWh}} \right) \\
 &+ \text{Prorated Startup Costs} \left( \frac{\$}{\text{MWh}} \right)
 \end{aligned}$$

### 7.5.1. Fuel-Related Costs

Eligible fuel-related costs for nuclear *resources* may be grouped into *resource* generation capacity data and total fuel-related costs.

#### 7.5.1.1. Resource Generation Capacity Data

The following sections define the *resources* power production capacities and efficiencies.

##### Net Power, MW (net)

Net power is equal to the power (MW) delivered to the grid. This is the gross *generation unit* output minus the house loads (the auxiliary power consumption of the *resources*) required to operate the *resource* for power production.

$$\text{Net Power (MW)} = \text{Gross Output (MW)} - \text{House Loads (MW)}$$

##### Maximum Licensed Reactor Power (RP)

This is the current maximum thermal power, MW(th) at which the nuclear *resource* is approved to operate according to their Canadian Nuclear Safety Commission (CNSC) Operation License. **z**

##### Heat Rate

Heat rate is the *resource's* heat input, MW(th) divided by its net electrical energy output, MWh.

$$\text{Heat Rate} = \text{Max Licenced RP (MW(th))} / \text{Net Electrical Production (MWh)}$$

### Incremental Fuel Consumption

Incremental fuel consumption (kg(U)/MWh) is the relationship between an additional MWh of output and the additional uranium fuel input in kg necessary to produce it. This is determined from the ratio of the change in fuel input to the change in *resource* MWh output.

$$\text{Incremental Fuel Consumption} \left( \frac{\text{kg}(U)}{\text{MWh}} \right) = \text{Fuel Burn Rate} \left( \frac{\text{kg}(U)}{\text{MW}(th)} \right) \times \text{Heat Rate} \left( \frac{\text{MW}(th)}{\text{MWh}} \right)$$

Fuel Burn Rate, kg(U)/MW(th) is the actual burn rate of the uranium fuel as reported in the station Annual Fuel Performance Report or the Station Safety Report.

### Capacity Factor

Capacity factor is the ratio of actual electrical *energy* output for the *resource* over a given period of time to the maximum possible electrical *energy* output over that period. Capacity factor indicates the extent of the use of the *resource*. If the *resource* is always running at its rated capacity, then the capacity factor is 100% or 1.

### Performance Factors

The performance factor is the calculated ratio of actual fuel burn to the theoretical fuel burn (design heat input) to achieve a required *generation unit* output.

In the nuclear industry, this is known as the Thermal Performance Indicator (TPI) as defined by World Association of Nuclear Operators (WANO). The WANO specifications dictate the data collection and analysis requirements.

The TPI is the ratio of overall actual cycle efficiency to the design cycle efficiency. In this regard, the TPI encompasses the entire reactor-boiler-turbine-condenser cycle. This indicator is an integrated measure that includes unnecessary heat loads, turbine cycle and condenser performance. Performance factor is expressed as a percentage, where 100% indicates perfect thermal performance.

#### 7.5.1.2. Total Fuel Related Costs (TFRC)

Eligible total fuel related cost is the sum of eligible basic fuel costs and eligible fuel disposal costs. All of these costs are expressed in \$/kg(U).

$$\text{TotalFuelRelatedCost} \left( \frac{\$}{\text{kg}(U)} \right) = \text{BasicFuelCost} \left( \frac{\$}{\text{kg}(U)} \right) + \text{FuelDisposalCost} \left( \frac{\$}{\text{kg}(U)} \right)$$

## Basic Fuel Costs

Eligible basic fuel costs are the total costs of fuel, including natural uranium cost, conversion to UO<sub>2</sub> and fabrication. These costs are supplied by the fuel vendor and are expressed in \$/kg.

## Fuel Disposal Costs

Eligible fuel disposal costs are the costs associated with transportation and disposal of spent fuel and are expressed in \$/kg (U).

Fuel disposal costs are added directly to the basic fuel costs to determine eligible total fuel-related costs. These costs must be supported by with invoices for the long term storage costs of spent fuels.

On-site storage costs for spent fuel is not an eligible cost as this is considered part of the fixed operating costs of the *resource*.

### 7.5.2. O&M Costs

Eligible operating costs are those costs directly attributed to consumable materials and services required for operation of the reactor and *energy* production. These are non-labour cost components accounting for materials and consumable costs incurred as a result of electrical power production and safe operation of the nuclear reactor.

They include the cost of:

- lubricants;
- chemicals;
- gases;
- demineralized water;
- acids;
- caustics and heavy water (deuterium oxide);
- tritium removal;
- ion exchange resins procurement and disposal; and
- filters.

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for operating costs for nuclear *resources* is five years.

#### 7.5.2.1. Major Maintenance Costs

Eligible major maintenance costs for nuclear *resources* include:

- turbine and *generation unit* refurbishment and rebuilds;

- turbine and *generation unit* control and power systems refurbishment and rebuilds;
- all major pump and motor repairs, boiler feed, condenser cooling water, primary heat transport, or moderator cooling;
- all systems heat exchanger tube plugging and tube bundle replacements;
- all critical system valves and valve operators repair or replacement;
- trash rack breakdown or equipment failure repair;
- repair or replacement of reactivity control units;
- feeder and pressure tube inspection, assessment and replacement;
- main output and unit transformer inspection, repair and replacement;
- isolated phase bus inspection and repair;
- all critical electrical systems, transformers, switchgear, bus duct, breakers, protective relays, motor control equipment, surge protection, rectifiers, inverters and batteries; and
- maintenance or replacement of emergency power systems.
- Costs reimbursed by insurance and/or covered by warranty under construction or equipment supply contracts are excluded.

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for major maintenance costs for nuclear *resources* is 10 years.

#### **7.5.2.2. Scheduled Maintenance**

Eligible scheduled maintenance costs for a nuclear *resource* include maintenance tasks during major *outages* and or during operating periods including inspections and work such as:

- turbine blade inspection;
- turbine diaphragm repair; casing inspection;
- turbine and *generation unit* seal inspections repair or replacement;
- heat exchanger cleaning;
- turbine emergency stop and control valves, reheat stop and intercept valve inspections and repairs;
- turbine and *generation unit* control and power systems inspections;
- all major pump and motor inspection and repairs, boiler feed, condenser cooling water, primary heat transport, or moderator cooling;



- all systems heat exchanger tube bundle inspections;
- all critical system valves and valve operator inspections;
- scheduled maintenance of reactivity control units;
- heavy water purification, ion exchange equipment, filters and strainers;
- containment systems inspection and maintenance;
- feeder and pressure tube inspection, assessment and replacement;
- main output and unit transformer inspection, repair and replacement;
- isolated phase bus inspection and repair;
- fueling machine service and maintenance;
- primary and secondary spent fuel bay systems inspection and repair;
- repairs to any safety related systems where its current condition is resulting in an impairment and forcing unit de-rate or shutdown;
- all electrical systems, transformers, switchgear, bus duct, breakers, protective relays, motor control equipment, surge protection, rectifiers, inverters and batteries; and
- scheduled maintenance of emergency power systems.

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for scheduled maintenance costs for nuclear *resources* is five years.

### 7.5.2.3. **Unscheduled Maintenance Costs**

Eligible unscheduled maintenance costs for nuclear *resources* are expenses incurred as a result of electrical production resulting from run-to-equipment-failure maintenance strategies and unplanned equipment failures.

Eligible costs include only maintenance costs related to:

- electrical production;
- reactor safety margin management;
- environmental qualification maintenance;
- radiation safety management;
- conventional safety;
- environmental safety; and
- regulator code compliance requirements (CNSC RD/GD-201, RD/GD-98).

Eligible costs incurred for corrective action and root cause investigations include:

- temporary repair;<sup>10</sup>
- repair,
- overhaul;
- refurbishment;
- replacement; or
- modification costs.

In addition, costs incurred as a result of corrective action and root cause investigations (inspection and equipment failure diagnosis) are also eligible.

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for unscheduled maintenance costs for nuclear *resources* is five years.

#### **7.5.2.4. Incremental Third-Party Payments**

[Section 6.3.4](#) describes the eligible incremental third-party payments that may be included in the *reference level* calculations for nuclear *resources*.

#### **7.5.2.5. Operational Costs Related to Start-Up**

Eligible operational costs related to start-up are costs incurred as a result of a cold start of a nuclear *resource*, where nuclear fuel, consumables, and energy from the grid are consumed during the course of the start-up phase.

In cases where a *resource* is *dispatched*, but needs to consume *energy* and fuel to start up, a *market participant* may include this cost into the incremental *energy* for the *resource* on a \$/MWh basis based on the total cost per start divided by *energy* production across the historical study period.

A *market participant* must submit the unit SCADA data as supporting documentation to show warm-up stage consumption, and hence the cost.

Total per start costs are calculated according to the following formula:

---

<sup>10</sup> Repairs can be considered temporary to allow equipment to last until the next *outage* due to limitations of downtime or inability to adequately conduct the repair outside of an *outage*.

$$\begin{aligned}
 & \text{Total per Start Cost} \left( \frac{\$}{\text{Start}} \right) \\
 &= \text{Start Fuel} \frac{\text{kg (U)}}{\text{Start}} \times \text{TFRC} \frac{\$}{\text{kg (U)}} \times \text{Performance Factor} \\
 &+ \text{StationserviceQuantity (MWh)} \times \text{Station ServiceRate} \frac{\$}{\text{MWh}} \\
 &+ \text{Start Maintenance Adder } \$/\text{start}
 \end{aligned}$$

$$\begin{aligned}
 & \text{Total per Start Cost} \left( \frac{\$}{\text{Start}} \right) \\
 &= \text{Start Fuel} \frac{\text{kg (U)}}{\text{Start}} \times \text{TFRC} \frac{\$}{\text{kg (U)}} \times \text{Performance Factor} \\
 &+ \text{StationserviceQuantity (MWh)} \times \text{Station ServiceRate} \frac{\$}{\text{MWh}} \\
 &+ \text{Start Maintenance Adder } \$/\text{start}
 \end{aligned}$$


---

Where:

- Start fuel is the fuel consumed from cold to licensed full power operation.
- Station service quantity is the grid power consumed during the start-up phase to the point of the nuclear *resource* powering its own house loads.
- Start maintenance adder (\$/start) is eligible maintenance costs required specifically and only for the *resource* start-up.

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for operational costs related to start-up for nuclear *resources* is 1 year.

## 7.6. ~~Energy~~Electricity Storage

For the purposes of establishing *reference levels*, an ~~energy~~*electricity storage resource* is considered to be a *resource* ~~that captures whose sole purpose is to capture~~ energy produced at one ~~point in~~ time for use at a later ~~point in~~ time. There are various ~~energy~~*electricity* storage technologies including technologies that rely on mechanical, electromechanical and chemical reactions.

~~An energy storage resource that has a~~ *dispatchable generation and dispatchable load* ~~electricity storage~~ resource will have an *energy offer reference level* and an *operating reserve offer reference level* for the ~~dispatchable generation~~ resource ~~associated with its injections~~ and an *operating reserve offer reference level* for the ~~dispatchable load~~ resource ~~associated with its withdrawals~~. This section describes the inputs that a *market participant* must submit in the applicable form to request the relevant *reference level*.

For the ~~generation resource of an energy~~ *electricity storage resource* that intends to inject, the IESO applies the following equation for the *energy offer reference level* and the components are described in the subsequent sections.

The *energy offer reference level* is equal to the greater of either the incremental costs for discharging the ~~energy~~ *electricity storage resource* or the opportunity cost.

$$\begin{aligned}
 & \text{Energy Offer Reference Level} \left( \frac{\$}{\text{MWh}} \right) \\
 &= \text{MAX} \left( \text{Charging Cost} \left( \frac{\$}{\text{MWh}} \right) + \text{Station Service Cost} \left( \frac{\$}{\text{MWh}} \right) \right. \\
 &+ \text{Total Global Adjustment Costs} \left( \frac{\$}{\text{MWh}} \right) + \text{Major Maintenance} \left( \frac{\$}{\text{MWh}} \right) \\
 &+ \text{Scheduled Maintenance Electrical and Mechanical} \left( \frac{\$}{\text{MWh}} \right) \\
 &\left. + \text{Unscheduled Maintenance Costs} \left( \frac{\$}{\text{MWh}} \right), \text{Opportunity Costs} \left( \frac{\$}{\text{MWh}} \right) \right)
 \end{aligned}$$

$$\begin{aligned}
 & \text{Energy Offer Reference Level} \left( \frac{\$}{\text{MWh}} \right) \\
 &= \text{MAX} \left( \text{Charging Cost} \left( \frac{\$}{\text{MWh}} \right) + \text{Station Service Cost} \left( \frac{\$}{\text{MWh}} \right) \right. \\
 &+ \text{Total Global Adjustment Costs} \left( \frac{\$}{\text{MWh}} \right) + \text{Major Maintenance} \left( \frac{\$}{\text{MWh}} \right) \\
 &+ \text{Scheduled Maintenance Electrical and Mechanical} \left( \frac{\$}{\text{MWh}} \right) \\
 &\left. + \text{Unscheduled Maintenance Costs} \left( \frac{\$}{\text{MWh}} \right), \text{Opportunity Costs} \left( \frac{\$}{\text{MWh}} \right) \right)
 \end{aligned}$$


---

## 7.6.1. Fuel-Related Costs

This section describes the fuel-related costs associated with charging costs and station service costs for ~~the generation resource of an energy~~ *an electricity storage resource*.

### 7.6.1.1. Charging Costs

The *short-run marginal costs* of an ~~energy~~ *electricity storage resource* includes the recharging costs for the *resource*.

The IESO calculates the eligible charging costs by using the following equation:

$$\begin{aligned} \text{Charging Cost } \left( \frac{\$}{\text{MWh}} \right) \\ = \frac{\text{Average Electricity Purchase Price from previous year } \left( \frac{\$}{\text{MWh}} \right)}{\text{Round Trip Efficiency}} \\ \times \text{IESO annual escalation} \end{aligned}$$

### Average Electricity Purchase Price

This calculation is completed by the *market participant* and is submitted to the *IESO* for review. For *resources* that have historical charging price data of greater than one year, the average electricity purchase pricing for the *resource* is based on the average price the *energy/electricity storage resource* paid for its ~~load-resource withdrawals~~ in the same calendar month of the previous year.

If the *energy/electricity storage resource* has been operating for less than one year or if there is no charging data for a particular month in the historical study period, it is assumed the *energy/electricity storage resource* is charging between 23:00 and 07:00. The average *LMP* at the ~~load-resource of the energy/electricity storage resource registered to withdraw energy~~ for those hours from the same month of the previous year is used to calculate the charging costs. If the *resource* has no historical *LMP* data at the ~~load-resource registered to withdraw energy~~, the DAM Ontario zonal price may be used in this calculation to base the *energy/electricity storage resource's* theoretical charging cost.

### Round-Trip Efficiency

The round-trip efficiency of an *energy/electricity storage resource* is analogous to the heat rate of a thermal *resource*.

The round-trip efficiency of the *energy/electricity storage resource* is the amount of *energy* that can be discharged compared to the amount of *energy* that was required to recharge the *energy/electricity storage resource*.

The efficiency of an *energy/electricity storage resource* is calculated using the following equation:

$$\text{Efficiency} = \frac{\sum \text{Annual MWh Discharged}}{\sum \text{Annual MWh Charged}}$$

The MWh charged is calculated using *meter data* based on the electricity purchased by the *market participant* to recharge the *energy/electricity storage resource* after discharging. This amount also includes the *energy* used to recharge the *energy/electricity storage resource* as a result of the *energy/electricity storage resource's* natural self-discharge.

Round-trip efficiency may be updated on an as-needed basis.

There are two options for the historical study period for round-trip efficiency for *energyelectricity storage resourcesresource*:

- where a *market participant* indicates a year-round round-trip efficiency factor is desired for a particular *energyelectricity storage resource*, the relevant historical study period is one year; or
- a seasonal round-trip efficiency factor may be used for a particular *energyelectricity storage resource* at the request of a *market participant*. In this case, the relevant historical study period is six months for the summer round-trip efficiency and six months for the winter round-trip efficiency.

### IESO Annual Price Escalation

The electricity consumption price is escalated by the calendar year-over-year electricity price increase, if any, that is imposed by the *IESO* and is relevant for the *resource*. This escalation factor is determined by taking the maximum of zero year-over-year change and the change in hourly electricity price simple average from the current calendar year from the hourly electricity price simple average previous calendar year.

### 7.6.2. Station Service Costs

There are two potential configurations for station services supply for an *energyelectricity storage resource*:

- *station services* are supplied behind the meter, with a tap off the low voltage side of the step-up transformer. Effect of *station services* in this case is captured in the round-trip efficiency calculation; or
- *station services* are supplied using a separate feed with a *revenue meter* for electricity consumed to serve *station services* and auxiliary loads.

Most *energyelectricity storage resourcesresource* have auxiliary services and *station services*. In some cases, these services are separately metered.

The *station service* costs adder is only eligible for an *energyelectricity storage resource* in the second configuration; where auxiliary loads are supplied by a separate metered connection or where the auxiliary loads have been removed from the efficiency using a meter on the auxiliary feed. Eligible *station service* costs are incurred by an *energyelectricity storage resource* due to higher auxiliary consumption during discharging (i.e. cooling or heating of batteries). It does not include normal auxiliary or *station services* loads required regardless of operating status: protection and controls, controls, lighting, monitoring, security, communications, etc.

The historical study period for *station service* costs for an *energyelectricity storage resource* is the corresponding calendar month from the previous calendar year.

$$\text{Station Service Cost} \left( \frac{\$}{\text{MWh}} \right) = \frac{\text{Auxiliary power consumed during operation (MWh)}}{\text{Energy Discharged during operation (MWh)}} \times \text{Average Electricity Purchase Price from previous year} \left( \frac{\$}{\text{MWh}} \right) \times \text{IESO annual escalation}$$

Eligible *station services* costs are calculated on a monthly average based on the same calendar month from the previous year.

A *market participant* must submit supporting documentation demonstrating auxiliary power consumed during operation and *energy* discharged during operation using the first available method of the following:

1. *Energy* discharged during operation: Discharged *energy* sold to the grid based on historical meter data from the same month from the previous year. This approach is preferred by the *IESO* where data is available.
2. Auxiliary power consumed during operation: Consumption at the meter is compared during periods of discharging and periods of idling for the same month from the previous year.
3. Vendor data: A *market participant* may submit datasheets or performance documentation from the vendor outlining the increased auxiliary demands during discharging.

$$\frac{\text{Auxiliary power consumed during operation (MWh)}}{\text{Energy Discharged during operation (MWh)}} = \frac{\text{Auxiliary Load (MW)} \times \text{duration for total discharge (hr)}}{\text{Discharge energy capacity of asset (MWh)}}$$

### 7.6.3. Total Global Adjustment Costs

*EnergyElectricity storage resources* may incur global adjustment costs for charging the *energyelectricity storage resource* and station service costs to provide an incremental unit of energy to the *IESO-administered markets*. A *market participant* may include average global adjustment costs, in \$/MWh, for an *energyelectricity storage resource* if the *resource* is Class B. *EnergyElectricity storage resourcesresource* with Class A *load resources* are not eligible to include global adjustment costs into their *energy offer reference level* as Class A *load resources* are able to manage their exposure to global adjustment charges by shifting consumption to non-peak hours.

The total global adjustment costs of an *energyelectricity storage resource'sresources energy offer reference level* includes the charging global adjustment component and the station service global adjustment component. This is shown in the formula below:

$$\text{Total Global Adjustment Costs} \left( \frac{\$}{\text{MWh}} \right) = \text{Charging Global Adjustment} \left( \frac{\$}{\text{MWh}} \right) + \text{Station Service Global Adjustment} \left( \frac{\$}{\text{MWh}} \right)$$



The charging global adjustment is calculated based on the *energy* used to charge the *energy/electricity storage resource* across the historical study period less the *energy* discharged by the *energy/electricity storage resource* across the same period. This is called the “global adjustment net charging cost”. For *energy/electricity storage resources/resource* that have a behind-the-meter load *resource* that is not related to the *energy/electricity storage facility*, consumption associated with such behind-the-meter load is not eligible to be included in the global adjustment cost calculation.

The calculation for determining charging global adjustment is:

$$\text{Charging Global Adjustment} \left( \frac{\$}{\text{MWh}} \right) = \frac{\text{Global Adjustment Net Charging Cost} (\$)}{\text{Energy Discharged During Period} (\text{MWh})}$$

The historical study period for calculating the charging global adjustment is one calendar year. Eligible supporting documentation includes settlement statements and meter data of charging and discharging operations during the period.

*Energy/Electricity storage resources* where *station services* are supplied using a separate feed with a *revenue meter* for electricity consumed to serve *station services* and auxiliary loads may include the global adjustment costs incurred on the *station service* in the *energy offer reference level*. The calculation for determining station

$$\text{Station Service Global Adjustment} \left( \frac{\$}{\text{MWh}} \right) = \frac{\text{Global Adjustment Station Service Charges} (\$)}{\text{Energy Discharged During Period} (\text{MWh})}$$

service global adjustment is:

The historical study period for calculating the station service global adjustment is one calendar year. Eligible supporting documentation includes settlement statements and meter data of charging and discharging operations during the period.

#### 7.6.4. O&M Costs

[Section 6.3](#) describes the eligible maintenance costs included into the *reference level* calculations for an *energy/electricity storage resource*.

##### 7.6.4.1. Major Maintenance Costs

Eligible major maintenance costs for an *energy/electricity storage resource* include:

- costs to replace or maintain inverter units;
- major maintenance to maintain a good state of repair and performance for the major storage or generation components. Some examples include:
  - compressed air energy storage – maintenance inspections associated with incremental operation of the compressor, expander, turbine, storage cavern;
  - hydrogen storage – maintenance of the electrolyzer, fuel cell, storage vessel;



- flywheels - vacuum system maintenance or maintenance of the rotating body/housing;
- lithium ion battery<sup>11</sup> - battery cell replacement for cycle-related degradation; and
- flow batteries - battery electrolyte rebalancing or replacement for flow batteries.

The *IESO* uses the vendor estimates for these costs based on the current pricing at the time of determining or updating *reference levels* as the indicator of the appropriate cost of the relevant product or service.

Costs reimbursed by insurance and/or covered by warranty of an *energy/electricity storage resource* or sub-components of an *energy/electricity storage resource* provided under a construction or equipment supply contracts are excluded.

The historical study period for major maintenance costs for an *energy/electricity storage resource* is 10 years.

#### 7.6.4.2. Scheduled Maintenance Costs

Eligible scheduled maintenance costs for an *energy/electricity storage resource* include costs incurred for routine inspections and work such as:

- annual (or bi-annual) vendor maintenance program;
- inverter annual maintenance;
- standard cleaning of electronics; and
- SCADA inspections.

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for scheduled maintenance costs for an *energy/electricity storage resource* is five years.

#### 7.6.4.3. Unscheduled Maintenance Costs

Eligible unscheduled maintenance costs for an *energy/electricity storage resource* includes overtime labour or third-party labour contracted to repair the components and materials costs associated with any such repairs in the event of equipment failure. The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for unscheduled maintenance costs for an energy storage *resource* is five years.

---

<sup>11</sup> For batteries, cell or electrolyte replacement must be like-for-like. The *energy* and power capacity of the *energy/electricity storage resource* should be equal to or less than the beginning of life capacity of the *resource*.

#### 7.6.4.4. Operating Reserve Offer Reference Levels —~~Generation Resource~~ from Injections

~~An energy~~ A dispatchable electricity storage resource that ~~has a dispatchable generation resource~~ that is registered to inject energy and can provide *operating reserve* to the grid from those injections needs to have an *operating reserve offer reference level* determined for the ~~dispatchable generation~~ dispatchable electricity storage resource registered to inject energy according to the methodology in this section.

$$\text{Operating Reserve Incremental Cost} \left( \frac{\$}{\text{MW}} \right) = \text{Auxiliary Energy Consumption} \left( \frac{\$}{\text{MW}} \right)$$

Auxiliary *energy* consumption is *energy* consumed by auxiliary services necessary for the ~~energy~~ electricity storage resource to respond to *dispatch instructions*. The following equation shows how auxiliary *energy* consumption is calculated:

$$\begin{aligned} \text{Auxiliary Energy Consumption} \left( \frac{\$}{\text{MW}} \right) &= \frac{\text{Auxiliary power consumed during operation (MWh)}}{\text{MW offered on Operating Reserve (MW)}} \times \\ &\text{Average Electricity Purchase Price from previous year} \left( \frac{\$}{\text{MWh}} \right) \times \text{IESO annual escalation} \end{aligned}$$

$$\begin{aligned} \text{Auxiliary Energy Consumption} \left( \frac{\$}{\text{MW}} \right) &= \frac{\text{Auxiliary power consumed during operation (MWh)}}{\text{MW offered on Operating Reserve (MW)}} \times \\ &\text{Average Electricity Purchase Price from previous year} \left( \frac{\$}{\text{MWh}} \right) \times \text{IESO annual escalation} \end{aligned}$$

Eligible costs that may be included in this calculation are the costs of auxiliary services necessary for the ~~energy~~ electricity storage resource to respond when *dispatched* (e.g. heating/cooling of batteries, keeping the expander/turbine available for compressed air energy storage, etc.). Eligible costs do not include costs related to components that are not directly related to *energy* generation (lighting, security etc.) or costs required to keep the ~~energy~~ electricity storage resource operating safely (protection and controls, controls, communications, etc.).

Submissions regarding consumption of auxiliary power for *reference levels* must be supported by ~~electricity~~ energy consumption meter data showing periods of idling (no *operating reserve* provided) and periods when *operating reserve* is provided to IESO. This data is used to assess the difference in auxiliary load when providing *operating reserve* versus when the *resource* is in operating mode.

Average electricity price paid by the ~~dispatchable load resource of the energy~~ *electricity storage resource* for its withdrawals is calculated based on the prices paid by the ~~dispatchable load resource of the energy~~ *electricity storage resource* that is withdrawing from the same month in the previous year, escalated by the IESO annual escalation rate.

The historical study period for auxiliary *energy* consumption for an *energy* *electricity storage resource* is one year. If one year of data is not available for a *resource*, a *market participant* must use a year of LMP data for a *resource* that is electrically proximate to the *market participant's resource*.

#### 7.6.4.5. Operating Reserve Reference Levels – ~~Load Resource~~ from Withdrawals

~~An energy~~ A *dispatchable electricity storage resource* that ~~has a dispatchable load resource that is registered to withdraw energy and~~ can provide *operating reserve* to the grid from those withdrawals needs to have an *operating reserve offer reference level* determined for the ~~dispatchable load~~ *electricity storage resource* registered to withdraw energy according to the methodology in this section.

*Operating reserve offer reference levels* are based on incremental costs incurred by the *resource* to supply *operating reserve*. If applicable, costs associated with provision of *operating reserve* are required to be demonstrated by the *market participant* on a *resource-specific* basis with relevant supporting documentation.

No incremental costs are associated with providing *operating reserve* for operating and maintenance of the equipment.

## 7.7. Dispatchable Loads

*Dispatchable loads* have an *operating reserve offer reference level*.

This section describes how the inputs should be completed to request an *operating reserve offer reference level*.

For *dispatchable loads*, the IESO applies the following equation for the *operating reserve offer reference level* and the components are described in subsequent subsections.

$$\begin{aligned}
 \text{Total OR Cost} & \left( \frac{\$}{\text{MW}} \right) \\
 & = \text{Incremental O\&M Costs} \left( \frac{\$}{\text{MW}} \right) + \text{Standby Costs for BTM Generation} \left( \frac{\$}{\text{MW}} \right) \\
 & \quad + \text{Standby Costs for BTM Storage} \left( \frac{\$}{\text{MW}} \right) \\
 & \quad + \text{Cost of Production Flexibility} \left( \frac{\$}{\text{MW}} \right)
 \end{aligned}$$

The following subsections provide details on the cost components of a *dispatchable load resource's operating reserve offer reference level*.

### 7.7.1. O&M Costs

#### 7.7.1.1. General Eligibility of O&M Costs

Eligible costs for *reference level* calculations for *dispatchable loads* include:

- O&M costs related to the supply of *operating reserve* and regular operation of the *dispatchable load*;
- incremental O&M costs; and
- incremental labour costs required to support eligible maintenance activities.

The following costs are not eligible for *reference level* calculations for *dispatchable loads*:

- O&M costs of equipment related to the requirement to vary the *resource's* load in response to *dispatch instructions*. These costs are expected to be included within the *resource's* energy *bid*, and hence are excluded for the purposes of supplying *operating reserve*;
- preventative maintenance, routine maintenance and other operating costs that are not directly attributable to the supply of incremental *operating reserve*;
- fixed or non-avoidable costs such as maintenance costs for *metering*, control or communications equipment or the general routine maintenance of behind the meter (BTM) generation or storage; and
- staffing costs (including staff overtime) required for operations of the *resource*.

#### 7.7.1.2. Cost Components

The O&M costs may be broken down into common categories of accounting that a *market participant* must submit to the *IESO* to verify and validate the *operating reserve offer reference level* curve for the *resource*.

The appropriate period for analysis of historical records may vary depending on the nature of the *resources* due to changes in the operations or production of the *dispatchable load facility*. An average of costs over three years is recommended as many costs are not expended on an annual basis. An alternative appropriate timeframe may be proposed by the *market participant* with a justification of the period selected.

#### 7.7.1.3. Incremental Operating or Maintenance Costs (\$/MW)

This cost component is related to any operating or maintenance costs associated with providing the incremental *operating reserve* services in accordance with the *IESO's* requirements that are in addition to the costs associated with acting as a *dispatchable*

*load*. For example, incremental O&M costs would include costs incurred to operate a *dispatchable load* in a way that it is available to reduce load more rapidly in response to *operating reserve* activation than it would normally require for a *dispatchable load*.

Incremental Operating or Maintenance Costs is calculated as follows:

$$\text{Incremental O\&M Costs} \left( \frac{\$}{\text{MW}} \right) = \frac{\text{Annualized Incremental O\&M Cost} \left( \frac{\$}{\text{Year}} \right)}{\text{Incremental OR Provided (MW)} \times \text{Annual Hours of OR Provided} \left( \frac{\text{hours}}{\text{Year}} \right)}$$

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for incremental operating or maintenance costs for *dispatchable* loads is three years. The appropriate historical study period may vary depending on the nature of the *dispatchable* load due to changes in the operations or production of the *dispatchable* load. A *market participant* may propose an alternative appropriate historical study period with an explanation of why this proposed period results in a more accurate estimate of current costs than the default three-year historical study period.

## 7.7.2. Standby Costs for BTM Generation or Storage

### 7.7.2.1. General Eligibility of Standby Costs for BTM Generation or Storage

If a *dispatchable load* employs a *BTM generation unit* or *energy/electricity storage unit* in order to vary its net load in response to *dispatch instructions*, a component of the *facility's* costs is reflected in the standby and operating costs of the BTM *resource unit*.

Costs included into the *reference levels* for *operating reserve* must be related to expenses incurred as a result of the provision of *operating reserve* and be incremental to the regular operation of the *dispatchable load resource* to provide *operating reserve* capabilities.

Variable costs of operating a BTM *resource generation unit* to reduce the *facility's load* in response to *dispatch instructions* are expected to be included within the *resource's energy bid*. Therefore, they are excluded for the purposes of *operating reserve*.

Standby costs incurred to enable the *dispatchable load* to provide incremental *operating reserve* quantities such as costs associated with incremental maintenance or standby losses are eligible costs if they are incremental to those costs incurred under normal operation as a *dispatchable load* and avoidable.

Ineligible O&M expenses include capital costs of BTM equipment and costs associated with routine maintenance of equipment. In general, any O&M costs that would be

incurred, regardless of whether the *resource* is providing *operating reserve*, are ineligible.

To determine eligible costs for *resources* with a *BTM generation unit* or *electricity storage unit*, a *market participant* should refer to the relevant subsection of [section 8](#) of this document and the relevant *reference level* workbook.

The following sections list eligible standby costs associated with BTM *resources generation unit* used to enable *dispatchable loads* to provide *operating reserve*.

### 7.7.2.2. Standby Costs for BTM Generation

In cases where a BTM *generation resource unit* must operate in a standby mode exclusively to enable the *resource* to provide *operating reserve*, only the fuel and O&M costs associated with standby mode operation of the BTM *resource generation unit* are eligible costs.

For example, a *dispatchable load* that cannot achieve the minimum ramp rates required to provide *operating reserve* without having the BTM *resource generation unit* on standby.

Fuel and O&M costs associated with operating the BTM *resource generation unit* to respond to *dispatch instructions* are not eligible because they are reflected in the *energy bid*.

Unit SCADA data may be used as supporting documentation of hours of standby operation and fuel consumption.

Standby costs for BTM *generation unit* is calculated as follows:

$$\text{Standby Costs for BTM Generation } \left( \frac{\$}{\text{MW}} \right) = \frac{\text{Annualized Generation Standby Costs } \left( \frac{\$}{\text{Year}} \right)}{\text{Incremental OR Provided (MW)} \times \text{Annual Hours of OR Provided } \left( \frac{\text{hours}}{\text{Year}} \right)}$$

A *market participant* must refer to the applicable *reference level* workbooks and guidance documents relevant to the generation technology employed and submit documentation in accordance with these documents, as applicable.

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for standby BTM *generation unit* costs for *dispatchable loads* is one year.

### 7.7.2.3. Standby Costs for BTM Storage

Eligible costs for *dispatchable loads* that use BTM *energy/electricity storage resource/unit* to respond to *dispatch instructions* for the *dispatchable load* include the costs of self-discharge or standby power requirements (e.g. for controls, or heaters), provided the BTM *energy/electricity storage resource/unit* is being utilized exclusively for the purposes of providing incremental *operating reserve* capability.

Losses and costs associated with operating the BTM *energy/electricity storage resource/unit* in response to *dispatch instructions*, such as charging costs, are expected to be included in the *energy bid* of the *resource*.

SCADA and/or submetering data may be used to support requested standby power requirements for energy storage and hours of operation.

Standby costs for BTM *Storage/electricity storage unit* is calculated as follows:

$$\text{Standby Costs for BTM Storage } \left( \frac{\$}{\text{MW}} \right) = \frac{\text{Annualized Storage Standby Costs } \left( \frac{\$}{\text{Year}} \right)}{\text{Incremental OR Provided (MW)} \times \text{Annual Hours of OR Provided } \left( \frac{\text{hours}}{\text{Year}} \right)}$$

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for standby BTM *energy/electricity storage unit* costs for *dispatchable* loads is one year.

### 7.7.2.4. Cost of Production Flexibility

Eligible costs of production flexibility include incremental costs of performance guarantees or of supply and/or delivery contracts for production inputs as a result of the provision of *operating reserve* capacity (such as premiums for flexibility in supply volumes).

Eligible costs of production flexibility are only those costs that would have been avoided had the *dispatchable load* not provided *operating reserve*.

Costs which are required as part of the normal operations as a *dispatchable load* are ineligible.

Cost of Production Flexibility is calculated as follows:



$$\text{Cost of Production Flexibility} \left( \frac{\$}{\text{MW}} \right) = \frac{\text{Annualized Incremental Cost of Flexibility} \left( \frac{\$}{\text{Year}} \right)}{\text{Incremental OR Provided (MW)} \times \text{Annual Hours of OR Provided} \left( \frac{\text{hours}}{\text{Year}} \right)}$$

The supporting documentation required from a *market participant* is described in [section 3.2](#). The historical study period for costs of production flexibility for *dispatchable loads* is three years. The appropriate historical study period may vary depending on the nature of the *dispatchable load* due to changes in the operations or production of the *dispatchable load*.

A *market participant* may propose an alternative appropriate historical study period with an explanation of why this proposed period results in a more accurate estimate of current costs than the default three-year historical study period.

## 7.8. Accounting for Currency Exchange

A *market participant* must indicate the portion of costs that are incurred in a foreign currency in their *reference level* submissions to help calculate the *reference level values* on a daily basis. These include, but are not limited to, O&M and fuel costs that are denominated in USD or other foreign currencies.

Conversion to CAD from another currency to calculate *reference level values* for a particular *dispatch day* is based upon the applicable end of day foreign exchange rate as posted by the Bank of Canada.

## 7.9. Late Day Start Reference Levels

*Non-quick start resources* submit *start-up offers* on an hourly basis. This allows them to submit higher *start-up offers* if they cannot run for their entire *minimum generation block run time* (MGBRT) within the period being scheduled. Such *offers* become higher towards the end of the day as a *market participant* shift the costs associated with their *energy* and *speed no-load offers* for the next-day operation into their *start-up offers*. A *market participant* is allowed to do so to help ensure that the *resource* is economical even when the *IESO* only evaluates the remaining hours in the day.

The *IESO* includes *minimum loading point energy* and *speed no-load costs* into the *start-up offer reference levels* for every hour that extends into the next day after HE 24.

The *IESO* includes costs related to *energy offers* and *speed no-load offers* into a *resource's start-up offer reference levels* for every hour where the *resource's* MGBRT extends into the next *dispatch day* after HE 24.



The *IESO* determines the escalating *start-up offer reference levels* based on the *reference levels* for *start-up offers*, *energy offers*, and *speed no-load offers*:

$$\text{Escalating Start – up Offer Reference Level} = N \times (IE \times MLP + SNL) + SU$$

---

$$\text{Escalating Start – up Offer Reference Level} = N \times (IE \times MLP + SNL) + SU$$

Where:

- N is the number of hours of a *resource's* MGBRT that spills into the next *dispatch day*.
- IE is the cost to produce at *MLP*, derived from the *energy offer reference level value*.
- SNL is the *speed no-load offer reference level value*.
- SU is the total *start-up offer reference level value*.

## 7.10. Alternate Data for Calculating Reference Level Values

(MR Ch. 7, section 22.1.3)

The *IESO* uses historical data and data created by external parties as part of calculating *reference level values* for the *reference levels* for *financial dispatch data parameters* set out in this section. When determining these *reference levels* for a *resource*, the *IESO* also determines if it is necessary to designate alternate data to enable the *IESO* to calculate the associated *reference level values*. During the process to determine a *resource's reference levels*, the *IESO* will inform the *market participant* of the alternate data that will be used.

### 7.10.1. Alternate Historical Data

#### 7.10.1.1. New Resource

When historical data for a *resource* is not available because it is a newly-registered *resource*, the *IESO* uses proxy data that closely resembles the unavailable data.

For example, a new hydro *resource* that registers to participate in the *energy* market will not have historical *LMPs*, which are necessary inputs to calculate opportunity cost components of an *energy reference level value* for the hydro *resource*. The *IESO* will designate a *resource* node that is electrically proximate to the new hydro *resource* and use its *LMPs* to calculate opportunity cost components of the hydro *resource's* relevant *reference level values*.

### 7.10.1.2. New Data Type

Where historical data for a data type is not available because it is a new data type, the IESO uses proxy data that closely resembles the unavailable data.

For example, because historical *LMP* data does not exist for the period prior to October 2023 the IESO instead uses historical real-time shadow prices as necessary in place of historical *LMP* data for this period.

### 7.10.2. Alternate External Data

When external data that the *IESO* uses to calculate *reference level values* for a *resource* are not available, the *IESO* uses the most recent version of this data set available.

For example, if the natural gas price index report that the *IESO* uses as an input to calculate *reference level values* for a thermal *resource* is not available for a particular day due to a tool failure, the *IESO* uses the most current version of this natural gas price index report that it has successfully downloaded to calculate relevant *reference level value(s)*.

**== End of Section ==**

## 8. Reference Levels for Non-Financial Dispatch Data Parameters

(MR Ch. 7, ss. 22.1.1, 22.1.3, and 22.3.1)

This section provides guidelines that a *market participant* should follow to register *reference levels* for *non-financial dispatch data parameters* during the Facility Registration process, including the supporting documentation required by the *IESO* for verification. The *reference levels* described in the following subsections are fixed for the entire *dispatch day* and a *market participant* may request the *IESO* determine seasonal *reference levels*, if applicable.

### 8.1. Descriptions of Non-Financial Dispatch Data Parameter Reference Levels

(MR Ch. 7, sections 22.3.1)

#### 8.1.1. Energy Ramp Rate Reference Level

The *energy ramp rate reference level* is determined for *dispatchable ~~generation and energy~~ electricity storage resources associated with injections and dispatchable generation resources*. It contains up to five quantity-ramp rate couplets that describe the rates, in megawatts per minute (MW/min), during normal operation across the entire *dispatchable* range, at which a *resource* can increase or decrease its output.

The *IESO* estimates an *energy ramp rate reference level* as the ramp rates of the *resource* across the entire *dispatchable* range under a competitive environment. This differs from the registered maximum *bid/offer* ramp rate value (a single value), which is the maximum ramp rate capability of the *resource*.

For example, if a *market participant* requests an *energy ramp rate reference level* that is equal to or greater than 1/5th of the *resource's* maximum capacity, then no supporting documentation is required. In this case, the requested *reference level* would allow the *resource* to ramp the entire capacity of the *resource* in one five-minute interval. An *energy ramp rate reference level* this high could not be used to withhold the *resource* and so it is unnecessary to submit supporting documentation for *energy ramp rate reference levels* that meet this requirement.

#### 8.1.2. Operating Reserve Ramp Rate Reference Level

The *operating reserve ramp rate reference level* is determined for *dispatchable electricity storage resources associated with injections and withdrawals, dispatchable generation resources* and *dispatchable load resources*. It is the rate, in megawatts per

minute (MW/min), during normal operation, at which a *resource* can increase or decrease its output upon the activation of *operating reserve*.

When a *resource* that is registered to provide 10-minute *operating reserve* submits a request for an *operating reserve* ramp rate that is at least 1/10th of the maximum *resource* capacity, the *resource* is exempt from providing supporting documentation for its *operating reserve* ramp rate *reference level*.

When a *resource* that is registered to provide 30-minute *operating reserve* (but is not registered to provide 10-minute *operating reserve*) submits a request for an *operating reserve* ramp rate that is at least 1/30th of the maximum *resource* capacity, the *resource* is exempt from providing supporting documentation for their *operating reserve* ramp rate *reference level*.

### 8.1.3. Lead Time Reference level

The *lead time reference level* is determined for *dispatchable* thermal *non-quick start resources*. It is the amount of time, in hours, needed for a *resource* to start up and reach its *MLP* from an offline state. The length of the *lead time* depends on the *thermal state* of the *resource* as either hot, warm or cold.

### 8.1.4. Minimum Loading Point Reference Level

The *minimum loading point reference level* is determined for *dispatchable* thermal *non-quick start resources* and is the minimum MW output that a *resource* must maintain to remain stable without the support of ignition.

### 8.1.5. Minimum Generation Block Run Time Reference Level

The *minimum generation block run-time reference level* is determined for *dispatchable* thermal *non-quick start resources* and presents the minimum number of consecutive hours a *resource* must be scheduled to its *MLP*, in accordance with the technical requirements of the *resource*.

### 8.1.6. Minimum Generation Block Down Time Reference Level

The *minimum generation block down time reference levels* are determined for each thermal state (hot, warm and cold) for *dispatchable* thermal *non-quick start resources*. It is the time between when a *resource* was last at its *MLP* before de-synchronization and the time the *resource* can be scheduled back to its *MLP* after re-synchronizing.

### 8.1.7. Maximum Number of Starts Per Day Reference Level

The *maximum number of starts per day reference level* is determined for *dispatchable* hydroelectric *resources* and all *dispatchable* thermal *non-quick start resources* except nuclear *resources*. This *reference level* is the maximum number of times a *resource* can be physically started within a *dispatch day*.

### 8.1.8. Energy Per Ramp Hour (Upper Bound) Reference Level

The *energy per ramp hour* (upper bound) *reference level* is determined for *dispatchable thermal non-quick start resources*. It is the maximum quantity of *energy*, in MWh, a *resource* is expected to produce in each ramp hour from the time of synchronization to the time it reaches its *MLP* during normal operation. *Energy per ramp hour* (upper bound) is required for the hot, warm and cold *thermal states* of the *resource*.

### 8.1.9. Energy Per Ramp Hour (Lower Bound) Reference Level

The *energy per ramp hour* (lower bound) *reference level* is determined for *dispatchable thermal non-quick start resources*. It is the minimum quantity of *energy*, in MWh, a *resource* is expected to produce in each ramp hour from the time of synchronization to the time it reaches its *MLP* during normal operation. *Energy per ramp hour* (lower bound) is required for the hot, warm and cold *thermal states* of the *resource*.

### 8.1.10. Ramp Hours to Minimum Loading Point Reference Level

*Ramp hours to MLP reference level* is determined for *dispatchable thermal non-quick start resources*. It is the number of hours required for the *resource* to ramp from synchronization to its *MLP* during normal operation. *Ramp hours to MLP* is required for the hot, warm and cold *thermal states* of the *resource*.

## 8.2. Thermal

Thermal *resources* will be required to register the following *reference levels* for *non-financial dispatch data parameters*:

#### Variant A:

- *Energy ramp rate reference level*; and
- *Operating reserve ramp rate reference level*.

#### Variant B:

- *Energy ramp rate reference level*;
- *Operating reserve ramp rate reference level*;
- *Lead time reference level*;
- *Minimum loading point reference level*;
- *Minimum generation block run time reference level*;
- *Minimum generation block down time reference level*;
- *Maximum number of starts per day reference level*; and
- *Ramp up energy to MLP reference level*.

### Variant C:

- *Energy ramp rate reference level;*
- *Operating reserve ramp rate reference level;*
- *Lead time reference level;*
- *Minimum loading point reference level;*
- *Minimum generation block run time reference level;*
- *Minimum generation block down time reference level;*
- *Maximum number of starts per day reference level; and*
- *Ramp up energy to MLP reference level.*

### Variant D:

Variant D *resources* that are *pseudo-unit resources* require the following *reference levels* for *non-financial dispatch data*:

- *Energy ramp rate reference level; and*
- *Operating reserve ramp rate reference level.*

Variant D *resources* that are not *pseudo-unit resources* require the following *reference levels* for *non-financial dispatch data*:

- *Lead time reference level;*
- *Minimum loading point reference level;*
- *Minimum generation block run time reference level;*
- *Minimum generation block down time reference level;*
- *Maximum number of starts per day reference level; and*
- *Ramp up energy to MLP reference level.*

To determine *reference levels* that are affected by *thermal states*, a *market participant* determines the ambient conditions associated with hot, warm and cold *thermal state reference levels*. These ambient conditions are used to determine all *thermal state-affected reference levels*.

*Market participants* must identify the transition points that are used to distinguish the hot *thermal state* from the warm *thermal state* from the cold *thermal state*. The transition points must be the same for the following *reference levels*:

- *lead time reference level;*
- *minimum generation block down-time reference level;*
- *ramp hours to minimum loading point reference level; and*
- *minimum and maximum energy per ramp hour reference levels.*

### 8.2.1. Energy Ramp Rate

A *market participant* must submit ramp rate and supporting documentation from OEM data with relevant sections from O&M manuals for the *resource* or performance tests. The *energy ramp rate reference level* for a *pseudo-unit* is a single MW/min value that is the slowest *energy* ramp rate over the entire *dispatchable* range of the *pseudo-unit* for the selected configuration for combined cycle mode and for *single cycle mode* (if applicable).

### 8.2.2. Operating Reserve Ramp Rate

A *market participant* must submit ramp rate and supporting documentation from OEM data with relevant sections from O&M manuals for the *resource* or performance tests. The *operating reserve ramp rate reference level* for a *pseudo-unit* is a single MW/min value that is the slowest *operating reserve* ramp rate for the *pseudo-unit* for the selected configuration for combined cycle mode and for *single cycle mode* (if applicable).

### 8.2.3. Lead Time – Hot, Warm and Cold

A *market participant* must submit *lead times* and supporting documentation from OEM data from contract or performance tests.

A *market participant* may choose points on their *lead time* curve to determine their hot, warm and cold *lead time reference levels*.

The choice of the cold *lead time reference level* is limited to allow the *resource* to be scheduled in a 24-hour look-ahead period.

The limitation on the cold *reference level* is expressed via the following equation:

$$24 \geq MGBRT_{ref} + Cold\ Lead\ Time_{ref} + 6$$

This relationship can be re-stated as:

$$Cold\ Lead\ Time_{ref} \leq 18 - MGBRT_{ref}$$

The value 6 in the above equation is derived from the aggregate of conduct thresholds for *lead time* (3 hours) and MGBRT (3 hours).

This limit is necessary because a cold *lead time reference level* higher than this value would make it possible for a *market participant* to withhold the *resource* through use of submitting a *lead time* parameter.

The *market participant* should manage occasions when a *resource* has a *lead time* that is longer than this limit through use of outage slips as the *resource* is unavailable.

### 8.2.4. Minimum Loading Point

A *market participant* must submit OEM data, a contract or performance tests to support a requested *MLP reference level*.

### 8.2.5. Minimum Generation Block Run Time

A *market participant* must submit a letter from an OEM that states a recommended *minimum generation block run-time* (MGBRT) for the *resource* to support a MGBRT *reference level*.

Where a *market participant* already has a registered MGBRT and is satisfied with the same MGBRT *reference level* for winter and summer, no additional supporting documentation must be submitted and the *IESO* will use the currently-registered value of MGBRT as the MGBRT *reference level*.

### 8.2.6. Minimum Generation Block Down Time

When requesting a *minimum generation block down-time reference level* for the hot *thermal state*, a *market participant* must submit a letter from an OEM that states a recommended *minimum generation block down time* for the *resource*.

This documentation must include the *resource* shutdown curve and relevant limitations on the equipment recommended by the OEM before the *resource* can be restarted after a shutdown.

When requesting *minimum generation block down-time reference levels* for the warm and cold *thermal states*, a *market participant* must provide documentation that clearly identifies the transition points that are used to distinguish the hot *thermal state* from the warm *thermal state* from the cold *thermal state*.

### 8.2.7. Maximum Number of Starts Per Day

The *maximum number of starts per day* is determined based on *reference levels* for *non-financial dispatch data parameters* for *minimum generation block run-time* and *minimum generation block down time* (hot), rounded down to the nearest whole number, as follows:

$$\text{Maximum Number of Starts Per Day} = \frac{24}{\text{MGBRT} + \text{MGBDT (hot)}}$$

### 8.2.8. Ramp Up Energy to MLP (Upper/Lower Bounds)

Start-up curves from the OEM or designer of a *resource* or operational data demonstrating a representative sample may be submitted to support *reference levels* for the following *non-financial dispatch data parameters*:



- *Ramp hours to MLP – Hot*
  - The number of hours required for the *resource* to ramp from synchronization to its *MLP* during normal operation when the *resource* is in a hot *thermal state*.
- *Energy per ramp hour (upper bound) – Hot*
  - The maximum quantity of *energy* in MWh that the *resource* is expected to produce in each ramp hour during normal operation when the *resource* is in a hot *thermal state*.
- *Energy per ramp hour (lower bound) – Hot*
  - The minimum quantity of *energy* in MWh that the *resource* is expected to produce in each ramp hour during normal operation when the *resource* is in a hot *thermal state*.
- *Ramp hours to MLP – Warm*
  - The number of hours required for the *resource* to ramp from synchronization to its *MLP* during normal operation when the *resource* is in a warm *thermal state*.
- *Energy per ramp hour (upper bound) – Warm*
  - The maximum quantity of *energy* in MWh that the *resource* is expected to produce in each ramp hour during normal operation when the *resource* is in a warm *thermal state*.
- *Energy per ramp hour (lower bound) – Warm*
  - The minimum quantity of *energy* in MWh that the *resource* is expected to produce in each ramp hour during normal operation when the *resource* is in a warm *thermal state*.
- *Ramp hours to MLP – Cold*
  - The number of hours required for the *resource* to ramp from synchronization to its *MLP* during normal operation when the *resource* is in a cold *thermal state*.
- *Energy per ramp hour (upper bound) – Cold*
  - The maximum quantity of *energy* in MWh that the *resource* is expected to produce in each ramp hour during normal operation when the *resource* is in a cold *thermal state*.
- *Energy per ramp hour (lower bound) – Cold*
  - The minimum quantity of *energy* in MWh that the *resource* is expected to produce in each ramp hour during normal operation when the *resource* is in a cold *thermal state*.

## 8.3. Hydroelectric

### 8.3.1. Energy Ramp Rate

A *market participant* must submit the *energy* ramp rate and supporting documentation from OEM data along with relevant sections from the O&M manuals or performance tests for the *resource*.

For hydroelectric *resources*, *applicable law* may limit the rate of change of flow through any of the units or the *resource*. Accepted supporting documentation includes:

- water management plans, highlighting change of flow limitations;
- operating agreements that may limit the ramp rate, highlighting limitations;
- environmental approval documentation related to flow restrictions, if applicable; and
- supporting calculations converting rate of change of flow to MW/min.

### 8.3.2. Operating Reserve Ramp Rate

A *market participant* must submit the *operating reserve* ramp rate and supporting documentation from OEM data with relevant sections from O&M manuals for the *resource* or performance tests.

### 8.3.3. Maximum Number of Starts per Day

Submission of the *dispatch data* parameter *maximum number of starts per day* is an option for hydroelectric *resources*. Establishing a *maximum number of starts per day reference level* is a pre-requisite for being able to submit the *maximum number of starts per day dispatch data* parameter. *Market participants* that intend to submit the *maximum number of starts per day dispatch data* parameters for a *resource* must request a *maximum number of starts per day reference level* and submit the following supporting documentation:

- recommendations from OEM data along with relevant sections from the O&M manuals for the *resource*;
- equipment specification from procurement of equipment;
- design basis for the *resource*; or
- historical *outage* data showing forced *outages* at the *resource* that are caused by the *resource* not being able to start any more times during the *dispatch day*.

## 8.4. Solar

### 8.4.1. Energy Ramp Rate

A *market participant* must submit ramp rates and supporting documentation such as *resource* specifications that show the ramp rates (MW/min) for the *resource* across its *dispatchable* range.

## 8.5. Wind

### 8.5.1. Energy Ramp Rate

A *market participant* must submit ramp rates and supporting documentation with relevant sections from O&M manuals for the *resource* that show the *energy* ramp rates (MW/min) for the *resource* across its *dispatchable* range.

## 8.6. Nuclear

### 8.6.1. Energy Ramp Rate

A *market participant* must submit ramp rates and supporting documentation with relevant sections from O&M manuals for the *resource* that show the *energy* ramp rates (MW/min) for the *resource* across its *dispatchable* range.

If nuclear ramp rate capabilities vary for the same range of production depending on reactor conditions, the *energy* ramp rate *reference level* for nuclear *resources* are set based on the least flexible profile of the *resource*.

## 8.7. ~~Energy~~Electricity Storage

### 8.7.1. Energy Ramp Rate

A *market participant* must submit ramp rates and supporting documentation with relevant sections from O&M manuals for the *resource* that show the *energy* ramp rates (MW/min) for the *resource* across its *dispatchable* range.

### 8.7.2. Operating Reserve Ramp Rate

A *market participant* must submit ramp rate and supporting documentation, which may be the same documentation as submitted to support a requested *energy* ramp rate if the rates are the same.

The *market participant* must submit supporting documentation from the operating manual to support a slower *operating reserve* ramp rate than the *energy* ramp rate. These include delays due to start-up, particularly for energy storage technologies with rotating generation or which need to be heated prior to starting.

## 8.8. Dispatchable Loads for Operating Reserve

### 8.8.1. Operating Reserve Ramp Rate

A *market participant* must submit *operating reserve* ramp rate and supporting documentation from the O&M manuals for the *resource*.

**— End of Section —**

## 9. Reference Quantities

(MR Ch. 7, sections 22.6.1, 22.6.3)

This section describes the methodology the *IESO* uses to determine *reference quantities* for *resources* that are registered to supply *energy* and *operating reserve*.

### 9.1. Thermal

Variants A, B, C and D thermal *resources* use the methodology in 9.1.1 and 9.1.2 to determine *reference quantity*.

#### 9.1.1. Energy

To determine the *reference quantity* for the available capacity of thermal *resources*, the *IESO* uses the same approach as the methodology to determine *resource* capability of the Generator Output and Capability Report as published by the *IESO* on the public [IESO Reports](#) website.

In this report, capability is measured as the maximum potential output of the *resource* under current conditions, which includes the maximum unit de-rates and *outages* for that hour.

#### 9.1.2. Operating Reserve

The *IESO* applies the following formulas for calculating the *reference quantities* for *operating reserve*. The supporting documentation required from a *market participant* is described in [section 3.2](#).

For variant A thermal *resources*, *MLP* is assumed to be 0 MW for the purpose of determining *operating reserve reference quantities*.

#### 9.1.3. 10-Minute Reserve (Synchronized)

The *reference quantity* for 10-minute *operating reserve* for thermal *resources* is calculated as follows:

$$\begin{aligned} \text{Ramp Capability}_{10S}(\text{MW}) \\ = \text{Operating Reserve Ramp Rate Reference Level (MW/min)} \times (10 \text{ minutes}) \end{aligned}$$

Operating Reserve Reference Quantity\_10S (MW) is the Ramp Capability\_10S (MW), but cannot exceed nameplate capacity minus *MLP* (MW) and planned de-rate/outage (MW) of the *resource*.

### 9.1.4. 10-Minute Reserve (Non-Synchronized)

For non-synchronized 10-minute *operating reserve*, the *reference quantity* for thermal *resources* is calculated as follows:

$$\begin{aligned} \text{Ramp Capability}_{10N}(\text{MW}) \\ = \text{Operating Reserve Ramp Rate Reference Level (MW/min)} \times (10 \text{ minutes}) \end{aligned}$$

Operating Reserve Reference Quantity\_10N (MW) is the Ramp Capability\_10N (MW), but cannot exceed nameplate capacity minus *MLP* (MW) and planned de-rate/outage (MW) of the *resource*.

### 9.1.5. 30-Minute Reserve (Non-Synchronized)

For non-synchronized 30-minute *operating reserve*, the *reference quantity* for thermal *resources* is calculated as follows:

$$\begin{aligned} \text{Ramp Capability}_{30R} (\text{non – synchronized}) (\text{MW}) \\ = \text{Operating Reserve Ramp Rate Reference Level (MW/min)} \\ \times (30 \text{ minutes}) \end{aligned}$$

Operating Reserve Reference Quantity\_30R (MW) is the Ramp Capability\_30R (MW), but cannot exceed nameplate capacity minus *MLP* (MW) and planned de-rate/outage (MW) of the *resource*.

## 9.2. Hydroelectric

### 9.2.1. Energy

Hydroelectric *resources* use the following methodologies to determine *energy reference quantities*:

- for each *resource*, the *market participant* submits documentation that indicates the minimum head-based capability for each *generation unit* in that *resource*. This documentation is used by the *IESO* to verify the indicated numerical value of the maximum production for each *generation unit* in each *resource* when the head is at its minimum level;
- the *reference quantity* for each hydroelectric *resource* is the sum of the minimum head-based capability across all *generation units* in that *resource*; and
- the MW amount that each *generation unit* contributes to the *reference quantity* can be no lower than 0 MW. This amount is reduced to account for *outages* and de-rates on that *resource*.

The following information must be provided for each *generation unit* within the *resource*:

- Minimum Head (m) – Upstream water level, downstream water level, headloss, supported by:
  - a water management plan or similar documentation describing the operating limits of the head pond and tail pond; and
  - headloss curves and tailwater curves;
- Flow (m<sup>3</sup>/s) – Supported by the equipment Hill chart or performance data; and
- Eff (%) - Supported by the equipment Hill chart or performance data.

### 9.2.2. Operating Reserve

Hydroelectric *resources* use the following methodologies to determine *operating reserve reference quantities*:

- for each *resource*, the *market participant* submits documentation that indicate the minimum head-based capability for each *generation unit* in that *resource*. This documentation is used by the *IESO* to verify the indicated numerical value of the maximum production for each *generation unit* in each *resource* when the head is at its minimum level;
- the *reference quantity* for each hydroelectric *resource* is the sum of the minimum head-based capability across all *generation units* in that *resource*; and
- the MW amount that each *generation unit* contributes to the *reference quantity* can be no lower than 0 MW. This amount is reduced to account for *outages* and de-rates on that *resource*.

## 9.3. Solar

### 9.3.1. Energy

A solar *resource's energy reference quantity* for each *dispatch hour* is equal to the *IESO's* centralized day-ahead forecast for that *resource*. In the process to determine the *day-ahead schedule*, a *market participant* has the option to submit their self-determined hourly *variable generation* forecast to the *IESO*. Where submitted, the *market participant*-submitted value becomes the *reference quantity*. The *reference quantity* is adjusted by the *IESO* for completed *outages* and derates in an after-the-fact process.

## 9.4. Wind

### 9.4.1. Energy

A wind *resource's energy reference quantity* for each *dispatch hour* is equal to the *IESO's* centralized day-ahead forecast for that *resource*. In the process to determine the *day-ahead schedule*, a *market participant* has the option to submit their self-determined hourly *variable generation* forecast to the *IESO*. Where submitted, this *market participant-submitted* value becomes the *reference quantity*. The *reference quantity* is adjusted by the *IESO* for completed *outages* and derates in an after-the-fact process.

## 9.5. Nuclear

### 9.5.1. Energy

The available capacity of nuclear *resources* is based on the methodology to determine the *resource* capability of the Generator Output and Capability Report as *published* on the public [IESO Reports](#) website.

In the report, capability is measured as the maximum potential output of the *resource* under current conditions, which includes maximum unit de-rates and *outages* for that hour.

## 9.6. ~~Energy~~Electricity Storage

### 9.6.1. Energy

The *energy reference quantity* for the *generation resource* at the ~~energy~~*electricity storage facility* is the *resource's* the maximum potential output of the *resource* less planned ~~outage~~*outages* or de-rates times 1 hour of discharging for each *dispatch day*.

For the *load resource* at the ~~energy~~*electricity storage facility*, the *energy reference quantity* is zero.

### 9.6.2. Operating Reserve

The *operating reserve reference quantity* is zero for the *generation resource* and *load resource* of an energy storage *facility*.

## 9.7. Dispatchable Load

*Dispatchable load resources* may offer up to 100% of their *dispatchable demand* as *operating reserve*, subject to the minimum requirements for *offering operating reserve*.



However, there may be considerations that prevent a *resource* from *offering* the full capability of its *dispatchable load* for *operating reserve*. The *market participant* must identify any such conditions to the *IESO* along with the supporting documentation listed in the following subsections.

### 9.7.1. Operating Reserve

The *operating reserve reference quantity* for a *dispatchable load resource* is the maximum amount of *dispatchable load*, as defined by the operating profile. The operating profile describes expected operation of the *resource* and must be submitted to the *IESO* when the *market participant* requests an *operating reserve reference quantity*. If the *market participant* does not submit information regarding the operating profile of the *dispatchable load*, the *operating reserve reference quantity* is the maximum quantity of *operating reserve* the *resource* is registered to *offer*.

As *dispatchable load resources* operate based on a combination of operational needs as well as the *energy market*, their capacity will vary according to their operating schedule.

The methodology to develop a *resource-specific reference quantity* for *operating reserve* for a *dispatchable load* involves the following steps:

1. Determine the *dispatchable energy* range:

$$\begin{aligned} \text{Dispatchable Energy Range} \\ &= \text{Highest Forecast Hourly Load} \\ &\times (1 - \text{Intra - hour load variability}) - \text{Non - dispatchable Load} \end{aligned}$$

2. Determine the maximum 10-minute or 30-minute ramp rate:

- a. If providing 10-minute *operating reserve*:

$$\begin{aligned} \text{Maximum 10 - Min Ramp Rate} \\ &= \text{Operating Reserve Ramp Rate Reference Level (MW/min)} \\ &\times (10 \text{ min} - \text{Response Time (min)}) \end{aligned}$$

- b. If providing 30-minute *operating reserve*:

$$\begin{aligned} \text{Maximum 30 - Min Ramp Rate} \\ &= \text{Operating Reserve Ramp Rate Reference Level (MW/min)} \\ &\times (30 \text{ min} - \text{Response Time (min)}) \end{aligned}$$

10-minute and 30-minute ramp rate are bounded by the rated capacity of the *resource*.

3. Determine the maximum hourly *operating reserve* capacity:

- a. If Dispatchable Energy Range > Maximum 10 or 30-Min Ramp Rate

Maximum Hourly OR Capacity = Maximum 10 or 30-Min Ramp Rate

b. If Dispatchable Energy Range < Maximum 10 or 30-Min Ramp Rate

Maximum Hourly OR Capacity = Dispatchable Energy Range

If a *resource's* submitted *operating reserve reference quantity* varies from the maximum quantity of *operating reserve* that the *resource* is registered to *offer*, then the *market participant* must submit supporting documentation that describes the relevant operating characteristics of the *resource*. These supporting documents must provide relevant information, including but not limited to:

- operating schedule and hourly *dispatchable load* forecast;
- details of intra-hour *load* variability and characteristics including equipment descriptions and historical *load* profile examples;
- expected response time; and
- other *resource*-specific considerations impacting the *resource's* ability to provide *operating reserve*.

### Operating Schedule and Hourly Dispatchable Load Forecast

*Dispatchable load resources* must submit supporting documentation that shows the operating schedules for the *resource* and the rationale for these operating schedules, along with their forecasted amount of *dispatchable load*.

### Intra-Hour Variability of Load

Information to support intra-hour variability of *load* include characteristics including equipment descriptions and historical *load* profile data. When a *load* varies by a percentage within the hour, given a specific level of *dispatch*, the *operating reserve reference quantity* must correspond to the minimum *load* within that hour. For example, if a *resource* that is *dispatched* as a 30 MW load has a *load* that may vary by 10% during the hour, the *operating reserve reference quantity* should be  $30 \times (100 - 10\%) = 27$  MW.

### Expected Response Time

The *market participant* must submit documentation to support a *resource's* response time, in minutes, after being *dispatched* before it will begin ramping its *load* and its *energy* ramp rate when requesting an *operating reserve reference quantity*. For example, if the response time for a *resource* with a 1 MW/minute *energy* ramp rate is two minutes, then the 10-minute *operating reserve reference quantity* cannot be higher than 8 MW and the 30-minute *operating reserve reference quantity* cannot be higher than 28 MW.

### Other Considerations

Other factors may impact a *dispatchable load resource's* ability to make its full registered *dispatchable load* capacity available for *operating reserve*. If those factors affect a *market participant's* request for an *operating reserve reference quantity*, the *market participant* must describe such factors and provide relevant documentation to support the requested *reference quantity*.

The methodology for determining the *operating reserve reference quantity* for a *dispatchable load resource* assumes its *operating reserve* capacity is not limited by specific factors associated with BTM generation or storage, but may be adapted, upon *IESO* approval, to account for the operational characteristics of the *resource*.

Some *dispatchable load resources* respond to an *operating reserve* activation by using behind the meter storage unit or generation to reduce net withdrawals rather than reduce consumption at the load facilities. The *IESO* determines these *resources'* *operating reserve reference quantities* according to the technology type of the behind the meter facilities.

**== End of Section ==**

## List of Acronyms

Acronym	Term
BTM	Behind the meter
EOH	Equivalent operating hour
GOG	Generator offer guarantee
HHV	Higher heating value
HR	Heat rate
ICE	Intercontinental Exchange
MGBRT	<i>Minimum generation block run-time</i>
<i>MLP</i>	<i>Minimum loading point</i>
MW	Megawatt
O&M	Operations and maintenance
OEM	Original equipment manufacturer
OR	<i>Operating reserve</i>
TPI	Thermal Performance Indicator
WANO	World Association of Nuclear Operators

– End of Section –

## References

Document ID & Link	Document Title
<a href="#">MDP_RUL_0002</a>	Market Rules
<a href="#">IMP_GDE_0088</a>	Market Manual 1.3: Identity Management Operations Guide
<a href="#">PRO_408</a>	Market Manual 1, <del>Part 1.5</del> : Market Registration Procedures
<a href="#">MDP_PRO_0033</a>	Market Manual 5: <del>Settlements Part 5.5</del> : Physical Markets Settlement Statements

- – End of Document –